

Copy

5

RM A57K14

0.2

CONFIDENTIAL

UNCLASSIFIED

NACA

RESEARCH MEMORANDUM

STATIC STABILITY AND CONTROL OF CANARD CONFIGURATIONS

AT MACH NUMBERS FROM 0.70 TO 2.22 - TRIANGULAR

WING AND CANARD ON AN EXTENDED BODY

By John W. Boyd and Victor L. Peterson

Ames Aeronautical Laboratory
Moffett Field, Calif.

LIBRARY COPY

FEB 10 1958

LANGLEY AERONAUTICAL LABORATORY
LIBRARY, NACA
LANGLEY FIELD, VIRGINIA

CLASSIFIED DOCUMENT

This material contains information affecting the National Defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

**NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS**

WASHINGTON
February 10, 1958

CONFIDENTIAL

UNCLASSIFIED

CLASSIFICATION CHANGED

UNCLASSIFIED

To

By


3/18/60

Date

TPA # 12

of

NACA RM A57K14



UNCLASSIFIED

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

STATIC STABILITY AND CONTROL OF CANARD CONFIGURATIONS

AT MACH NUMBERS FROM 0.70 TO 2.22 - TRIANGULAR

WING AND CANARD ON AN EXTENDED BODY

By John W. Boyd and Victor L. Peterson

SUMMARY

Results of an investigation of the static stability and control characteristics of a canard airplane configuration are presented without analysis for the Mach number range from 0.70 to 2.22. The configuration consisted of a triangular wing and triangular canard, both of aspect ratio 2.0, a low aspect ratio vertical tail, and a modified Sears-Haack body. The hinge line of the canard was in the extended wing chord plane, 1.79 wing mean aerodynamic chords ahead of the reference center of moments. The ratio of the area of the exposed canard panels to the total area of the wing was 6.9 percent. Data are presented for various combinations of the body, canard, wing, and vertical tail at 0° and 5° sideslip for an angle-of-attack range of -6° to $+18^\circ$. The canard deflection angles ranged from 0° to $+20^\circ$.

INTRODUCTION

The possible gains to be realized at supersonic speeds in the form of reduced trim drag and increased maneuverability by the use of canards rather than conventional tail-aft controls have resulted in increased interest in these arrangements. Therefore, an extensive research program aimed at determining the static longitudinal and directional characteristics of a number of canard configurations has been undertaken at the Ames Aeronautical Laboratory.

As a part of the program, tests were conducted to determine the effect of canard location on the aerodynamic characteristics of the configurations. This report is one of a series pertaining to the program and presents without analysis the longitudinal and directional characteristics for one complete configuration and its component parts, utilizing



UNCLASSIFIED

an extended body in order to shift the canard forward. This configuration, which differed from that of reference 1 only in the body length and distance from the canard to the wing, consisted of a triangular wing and canard, both of aspect ratio 2.0, a low aspect ratio vertical tail, and a modified Sears-Haack body.

Results for the configuration utilizing the normal Sears-Haack body have been presented in reference 1.

NOTATION

- a.c. aerodynamic center determined at $C_L = 0$, percent \bar{c} .
- b wing span, ft
- \bar{c} mean aerodynamic chord of wing, ft
- \bar{c}_c mean aerodynamic chord of canard, ft
- c_c canard root chord, ft
- C_D drag coefficient, $\frac{\text{drag}}{qS}$
- C_{D_0} drag coefficient at zero lift
- C_L lift coefficient, $\frac{\text{lift}}{qS}$
- C_{L_α} lift-curve slope taken through zero angle of attack, per deg
- C_m pitching-moment coefficient, $\frac{\text{pitching moment}}{qS\bar{c}}$, referred to projection of the 0.04 \bar{c} point on the fuselage reference line (center of moments different from that of ref. 1)
- C_l rolling-moment coefficient, $\frac{\text{rolling moment}}{qSb}$
- C_n yawing-moment coefficient, $\frac{\text{yawing moment}}{qSb}$, referred to projection of the 0.04 \bar{c} point on the fuselage reference line
- C_y side-force coefficient, $\frac{\text{side force}}{qS}$
- $\frac{\Delta C_l}{\beta}$ difference between rolling-moment coefficients at 5° and 0° sideslip divided by 5°, per deg
- $\frac{\Delta C_n}{\beta}$ difference between yawing-moment coefficients at 5° and 0° sideslip divided by 5°, per deg

$\frac{\Delta C_Y}{\beta}$	difference between side-force coefficients at 5° and 0° sideslip divided by 5° , per deg
C_{h_c}	canard hinge-moment coefficient, $\frac{\text{canard hinge moment}}{qS_c(c_c/2)}$
C_{Z_c}	force coefficient normal to canard, $\frac{\text{normal force}}{qS}$
$\left(\frac{L}{D}\right)_{\max}$	maximum lift-drag ratio
M	free-stream Mach number
q	free-stream dynamic pressure, lb/sq ft
S	wing area formed by extending the leading and trailing edges to the plane of symmetry, sq ft
S_c	exposed canard area, sq ft
α	angle of attack of wing root chord, deg
β	sideslip angle measured between the relative wind and vertical plane of symmetry, deg
δ	angle of deflection of the canard with respect to the extended wing chord plane, positive when trailing edge is down, deg

Configurations are denoted by the following letters used in combination:

B	body
C	canard
V	vertical tail
W	wing

APPARATUS AND MODEL

Test Facility

The experimental data were obtained in the Ames 6- by 6-foot supersonic wind tunnel which is a closed-circuit variable-pressure type with a Mach number range continuous from 0.70 to 2.22. A recent modification involved perforating the test-section floor and ceiling and adding

a boundary-layer removal system to enable uniform flow to be maintained at transonic and low supersonic speeds. At the same time injector flaps were installed downstream of the test section to extend the upper Mach number limit by reducing the required compression ratio across the nozzle and by better matching the weight flow characteristics of the nozzle with those of the compressor.

Analysis of the results of an extensive survey of the modified wind-tunnel characteristics, although incomplete, is sufficiently complete to establish the validity of the results of the present investigation.

Description of Model and Balances

The sting-mounted model consisted of an aspect ratio 2.0 triangular wing, an aspect ratio 2.0 all-movable triangular canard, and a low aspect ratio vertical tail, all mounted on a modified Sears-Haack body. The configuration differed from that of reference 1 only in the body length and distance between the canard and the wing. A cylindrical section was inserted in the Sears-Haack body between the wing and canard so that the canard was simply moved forward in the extended wing chord plane. (See fig. 1(a).) The canard hinge line ($0.35\bar{c}$) was 1.79 wing mean aerodynamic chords ahead of the reference center of moments ($0.04\bar{c}$). A dimensional sketch of the model is shown in figure 1(a). The wing and vertical tail had NACA 0003-63 sections streamwise and the constant thickness canard, detailed in figure 1(b), had beveled leading and trailing edges. The ratio of the area of the exposed canard panels to the total area of the wing was 6.9 percent and the ratio of the total areas was 12.9 percent. The wing, canard, and vertical tail were of solid steel construction to minimize aeroelastic effects. The surfaces were polished to give a smooth surface and further treated to prevent corrosion.

The fuselage was cut off as shown in figure 1(a) to accommodate the sting and the six-component strain-gage balance which measured forces and moments on the entire configuration. Canard normal forces and hinge moments were obtained from a two-component strain-gage balance mounted in the nose of the fuselage. The canard, wing, and vertical tail were removable, enabling data to be taken which would permit an evaluation of the contribution of each of the component parts of the model and the interference between them.

TESTS AND PROCEDURES

Range of Test Variables

For convenience, table I is presented showing the range of variables for each of the configurations tested. Mach numbers of 0.70, 0.90, 0.95,

1.00, 1.05, 1.10, 1.30, 1.50, 1.70, 1.90, and 2.22 and angles of attack ranging from -6° to $+18^{\circ}$ at 0° and 5° sideslip were covered in the investigation. The test Reynolds number based on the wing mean aerodynamic chord was 1.84 million at Mach numbers of 0.95, 1.00, 1.05, and 1.10, and 3.68 million at all other Mach numbers. The smaller Reynolds number was necessary at transonic speeds because of model structural limitations.

At the relatively low Reynolds numbers at which most wind tunnels operate, extensive regions of laminar flow can exist on models at zero lift. At lifting conditions the transition points on the wing, canard, and vertical tail usually move forward, thus causing a change in the friction drag with changing lift coefficient which is difficult to evaluate and, moreover, not necessarily representative of full scale. In order to induce transition at fixed locations on the component parts, a 0.010-inch-diameter wire was placed on the wing and 0.005-inch-diameter wires were affixed to the canard and vertical tail in the locations shown in figure 1(a). When the model was tested with the canard off, a 0.010-inch-diameter wire was located on the body 4 inches from the nose. The wire sizes were selected on the basis of the results of reference 2. Although there is no conclusive evidence as to the magnitude of the form drag increment contributed by the transition wires, previous studies have indicated this increment to be not more than 0.0010. All of the data presented herein are for transition-fixed conditions.

Reduction of Data

The data presented herein have been reduced to standard NACA coefficient form. Rolling-moment, side-force, yawing-moment, and pitching-moment coefficients were computed about the body axes. Lift and drag coefficients were referred to the wind axes. The pitching-moment and yawing-moment coefficients were referred to the 0.04 point of the wing mean aerodynamic chord. This location was chosen to give a minimum static margin of 0.037 in the range of trim lift coefficients between 0 and 0.5 throughout the Mach number range investigated. It should be noted that this requirement resulted in a center-of-moment location that was different from that of reference 1. The canard hinge moments were computed about a hinge line located at the 0.35 point of the canard mean aerodynamic chord. Factors which affect the accuracy of the results are discussed in the following paragraphs.

Stream variations.- Surveys of the stream characteristics of the Ames 6- by 6-foot supersonic wind tunnel showed that in the region of the test section, essentially no stream curvature existed in the pitch plane of the model and that the axial static-pressure variations were usually less than ± 1 percent of the dynamic pressure. The static-pressure variation resulted in negligible longitudinal-buoyancy corrections to the drag of this model. Therefore, no corrections for stream curvature or static-pressure variation were made in the present investigation.

The results of these surveys also showed that a stream angle existed in the vertical plane along the tunnel center line. Similar results showing a stream angle of less than $\pm 0.3^\circ$ throughout the Mach number range were obtained from tests of the model mounted in a horizontal position on the tunnel center line ($\beta = 0^\circ$) and pitched in the vertical plane. No data were available from stream surveys or model tests to determine the lateral deviations of the stream; however, they also are believed to be small in view of the small deviations from a uniform stream measured in the vertical plane. Therefore, the data at 0° sideslip which were obtained with the model mounted in the horizontal position could only be corrected for the stream angles in the pitch plane. Since the data of primary interest at these conditions, and particularly the drag, are sensitive to stream angle changes in the pitch plane, it was considered necessary to make these corrections. On the other hand lift, drag, and pitching-moment characteristics do not vary appreciably with yaw angles so that these coefficients would only be slightly affected if small stream angles existed in the yaw plane.

The results at a constant sideslip angle of 5° were obtained by mounting the model in a horizontal position on a sting bent off the tunnel center line and again pitching in the vertical plane. Results were not available which would permit stream angle corrections in either the pitch or yaw planes to be applied to these data. However, the lateral-directional characteristics which are of primary interest at these test conditions, would not be appreciably affected by the existence of small stream angles in either the pitch or yaw planes.

Support interference.— The effects of model support interference on the aerodynamic characteristics were considered to consist primarily of a change in the pressure at the base of the model. However, the drag data presented herein contain no base drag component since the base pressure was measured and the drag was adjusted to correspond to that for which the base pressure is equal to the free-stream static pressure. Therefore, no corrections were made to take into account support interference.

Tunnel-wall interference.— The effectiveness of the perforations in the wind-tunnel test section in preventing choking and absorbing reflected disturbances at transonic and low supersonic speeds has been established experimentally. Unpublished data from the wind-tunnel calibration indicate that reliable data can be obtained throughout the Mach number range if certain restrictions are imposed on the model size and attitude. The configurations and methods of testing used in the present investigation conform to these restrictions so that the data at transonic and low supersonic speeds are reasonably free of interference effects. Thus, no corrections for wall interference have been made.

RESULTS

The results in this report are presented without analysis in order to expedite publication. All of the experimental data are presented in tables II through V. An index to these tabulated results is presented in table I. Selected portions of the data are presented in figures 2 through 7.

Figure 2 shows the lift, drag, and pitching-moment characteristics with the canard on and deflected and with the canard off for several test Mach numbers. Variations of canard normal force and hinge-moment coefficients as a function of angle of attack at constant canard deflection angles are presented in figure 3. Summarized in figure 4 are the maximum lift-drag ratios, lift-curve slopes, minimum drag coefficients, and aerodynamic centers as a function of Mach number for the canard on at zero deflection and for the canard off.

The results of figure 5 show the effect of configuration changes on the rolling-moment, side-force, and yawing-moment coefficients as a function of angle of attack at constant sideslip angles. The effects of deflecting the canard on the lateral-directional characteristics are presented in figure 6 as a function of angle of attack at constant angles of sideslip. Summarized in figure 7 are $\Delta C_L/\beta$, $\Delta C_Y/\beta$, and $\Delta C_n/\beta$ as a function of Mach number at constant angles of attack of 0° , 10° , and 18° for the canard on at zero deflection and for the canard off.

Ames Aeronautical Laboratory
National Advisory Committee for Aeronautics
Moffett Field, Calif., Nov. 14, 1957

REFERENCES

1. Boyd, John W., and Peterson, Victor L.: Static Stability and Control of Canard Configurations at Mach Numbers From 0.70 to 2.22 - Longitudinal Characteristics of a Triangular Wing and Canard. NACA RM A57J15, 1957.
2. Winter, K. G., Scott-Wilson, J. B., and Davies, F. V.: Methods of Determination and of Fixing Boundary-Layer Transition on Wind Tunnel Models at Supersonic Speeds. R.A.E. TN Aero. 2341, British, Sept. 1954.

TABLE I.- RANGE OF VARIABLES FOR CONFIGURATIONS TESTED

Configuration	δ , deg	β , deg	Tabulated data, table no.
BVW		0 and 5	II(a), III(a)
BVWC	0	0 and 5	II(b), III(b)
BVWC	2.5	0	II(c)
BVWC	5.2	0	II(d)
BVWC	9.7	0 and 5	II(e), III(c)
BVWC	19.5	0	II(f)
BWC	0	5	III(d)
BWC	9.7	5	III(e)
BW		5	III(f)
BV		0 and 5	IV(a), V(a)
BVC	0.2	0 and 5	IV(b), V(b)
BVC	4.5	0	IV(c)
BVC	9.8, 10.2	0 and 5	IV(d), V(c)
BVC	19.8	0	IV(e)
BC	0.2	5	V(d)
BC	9.6	5	V(e)
B		5	V(f)

TABLE II.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 0^\circ$

(a) BVW

α	c_L	c_D	$c_{L\alpha}$	$c_{D\alpha}$	$c_{L\alpha\alpha}$	$c_{D\alpha\alpha}$	$c_{L\alpha\alpha\alpha}$
deg							
0.70	-0.64	-0.331	.0435	.1084	.0008	-0.004	.0022
	-0.43	-0.203	.0237	.0686	.0009	-0.004	.0019
	-0.23	-0.104	.0145	.0354	.0008	-0.003	.0014
	-0.08	-0.043	.0120	.0179	.0001	-0.001	.0007
	-0.03	-0.017	.0115	.0101	-0.000	-0.001	.0005
	0.002	-0.001	.0115	.0055	-0.000	-0.001	.0005
	0.017	0.062	.0121	-.0138	.0001	-0.000	.0003
	0.037	0.157	.0190	-.0456	.0000	-0.001	.0002
	0.057	0.263	.0327	-.0798	.0001	-0.001	.0002
	0.078	0.377	.0560	-.1160	.0001	-0.000	-.0000
	0.097	0.482	.0844	-.1510	.0001	-0.001	-.0001
	0.117	0.599	.1241	-.1845	.0001	-0.000	-.0002
	0.137	0.716	.1721	-.2260	.0000	-0.000	-.0002
	0.158	0.837	.2315	-.2622	.0001	0.001	.0003
	0.177	0.940	.2927	-.2922	.0001	0.001	.0015
0.90	-0.62	-0.337	.0446	.1272	.0009	-0.004	.0021
	-0.42	-0.215	.0248	.0802	.0010	-0.003	.0016
	-0.21	-0.104	.0144	.0394	.0006	-0.002	.0010
	-0.06	-0.037	.0118	.0176	.0001	-0.001	.0004
	-0.01	-0.013	.0118	.0100	-0.001	-0.001	.0003
	0.003	0.003	.0119	.0047	-0.001	-0.000	.0002
	0.020	0.080	.0130	-.0216	.0000	-0.001	.0003
	0.039	0.186	.0212	-.0607	.0000	-0.001	.0002
	0.059	0.305	.0388	-.1062	.0000	-0.001	.0002
	0.080	0.427	.0658	-.1532	.0000	-0.001	.0002
	0.099	0.550	.1007	-.2028	.0000	-0.002	.0002
	0.120	0.684	.1487	-.2606	.0001	-0.001	.0002
	0.139	0.813	.2047	-.3212	.0001	-0.002	.0005
	0.159	0.942	.2708	-.3775	.0002	-0.002	.0009
	0.178	1.031	.3313	-.4077	.0024	-0.004	.0029
0.95	-0.59	-0.361	.0511	.1536	.0007	-0.006	.0024
	-0.40	-0.236	.0292	.0995	.0009	-0.005	.0021
	-0.23	-0.116	.0172	.0504	.0003	-0.004	.0014
	-0.04	-0.037	.0159	.0037	.0001	-0.003	.0010
	0.001	-0.012	.0132	.0114	-0.002	-0.001	.0007
	0.005	0.007	.0137	.0033	-0.001	-0.002	.0007
	0.022	0.099	.0164	-.0331	-0.001	-0.002	.0008
	0.041	0.219	.0269	-.0840	.0000	-0.002	.0007
	0.061	0.346	.0482	-.1400	.0001	-0.002	.0007
	0.081	0.467	.0762	-.1914	.0000	-0.002	.0006
	0.101	0.586	.1135	-.2433	.0000	-0.003	.0007
	0.121	0.709	.1614	-.2964	.0001	-0.002	.0007
	0.141	0.823	.2143	-.3450	.0001	-0.003	.0009
	0.161	0.940	.2775	-.3949	.0001	-0.003	.0011
	0.181	1.042	.3450	-.4382	.0007	-0.003	.0025
1.00	-0.59	-0.353	.0530	.1566	.0006	-0.005	.0021
	-0.38	-0.225	.0311	.1008	.0005	-0.004	.0018
	-0.18	-0.105	.0225	.0474	.0006	-0.003	.0015
	-0.03	-0.028	.0189	.0154	.0001	-0.002	.0009
	0.003	-0.003	.0170	.0044	-0.002	-0.001	.0006
	0.007	0.021	.0188	-.0052	-0.002	-0.002	.0007
	0.022	0.105	.0205	-.0410	-0.002	-0.001	.0007
	0.042	0.222	.0315	-.0932	.0001	-0.002	.0006
	0.062	0.337	.0504	-.1430	.0001	-0.002	.0007
	0.082	0.469	.0817	-.2000	.0001	-0.002	.0008
	0.102	0.577	.1154	-.2460	.0001	-0.002	.0009
	0.122	0.687	.1598	-.2918	.0001	-0.003	.0008
	0.142	0.791	.2099	-.3349	.0001	-0.003	.0008
	0.162	0.903	.2706	-.3810	.0001	-0.003	.0013
	0.182	1.000	.3343	-.4202	.0005	-0.002	.0021
1.05	-0.60	-0.342	.0505	.1453	.0004	-0.004	.0018
	-0.40	-0.239	.0320	.1053	.0005	-0.003	.0015
	-0.18	-0.109	.0202	.0473	.0004	-0.003	.0013
	-0.04	-0.021	.0183	.0068	.0000	-0.001	.0006
	0.002	-0.005	.0171	.0065	.0000	-0.001	.0004
	0.006	0.003	.0171	.0062	-0.002	-0.001	.0006
	0.022	0.094	.0192	-.0351	.0000	-0.001	.0005
	0.042	0.205	.0282	-.0895	.0001	-0.002	.0006
	0.061	0.331	.0479	-.1365	.0000	-0.002	.0007
	0.082	0.443	.0782	-.1885	.0000	-0.002	.0008
	0.101	0.544	.1094	-.2305	.0000	-0.002	.0008
	0.122	0.668	.1567	-.2847	.0001	-0.003	.0011
	0.141	0.760	.2019	-.3229	.0001	-0.003	.0013
	0.162	0.868	.2609	-.3678	.0000	-0.003	.0012
	0.182	0.961	.3232	-.4049	.0004	-0.003	.0023
1.10	-0.61	-0.353	.0522	.1622	.0008	-0.003	.0011
	-0.40	-0.233	.0319	.1126	.0007	-0.003	.0008
	-0.19	-0.111	.0205	.0571	.0006	-0.001	.0001
	-0.05	-0.038	.0176	.0242	.0004	-0.001	.0005
	0.001	-0.016	.0173	.0152	.0001	0.001	-.0002
	0.006	0.008	.0179	.0050	-0.002	0.001	-.0004
	0.021	0.083	.0195	-.0259	-0.002	-0.000	-.0001
	0.041	0.196	.0286	-.0788	-0.002	-0.001	.0005
	0.061	0.320	.0466	-.1387	-0.000	-0.002	.0008
	0.081	0.443	.0731	-.1917	-0.001	-0.002	.0009
	0.101	0.559	.1074	-.2407	.0000	-0.001	.0004
	0.121	0.644	.1471	-.2853	.0002	-0.002	.0008
	0.141	0.729	.1915	-.3047	.0002	-0.002	.0009
	0.161	0.833	.2489	-.3527	.0000	-0.003	.0014
	0.181	0.927	.3092	-.3893	.0001	-0.003	.0018

TABLE II.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS
 AT $\beta = 0^\circ$ - Continued
 (a) BVW - Concluded

M	α , deg	C_L	C_D	C_m	C_L	C_Y	C_n
1.30	-0.61	-0.292	.0430	.1290	.0007	-0.0000	.0003
	-0.40	-0.190	.0268	.0844	.0007	.0001	-.0002
	-0.20	-0.094	.0178	.0417	.0007	.0002	-.0005
	-0.06	-0.030	.0154	.0146	.0004	.0003	-.0007
	-0.01	-0.007	.0152	-.0057	.0002	.0003	-.0009
	0.004	0.013	.0153	-.0027	.0002	.0003	-.0009
	0.020	0.081	.0169	-.0313	.0001	.0002	-.0007
	0.040	0.178	.0251	-.0738	.0002	.0002	-.0008
	0.060	0.275	.0402	-.1162	.0002	.0001	-.0004
	0.080	0.371	.0622	-.1571	.0001	.0001	-.0002
	0.100	0.466	.0907	-.1975	.0002	.0000	-.0001
	0.120	0.559	.1270	-.2359	.0001	.0001	-.0000
	0.140	0.647	.1675	-.2716	.0000	.0000	.0000
	0.160	0.741	.2170	-.3080	.0001	-0.0000	.0001
	0.180	0.826	.2704	-.3376	.0001	-0.0001	.0004
1.50	-0.63	-0.268	.0425	.1168	.0005	.0001	-.0003
	-0.41	-0.177	.0264	.0769	.0004	.0001	-.0004
	-0.21	-0.087	.0180	.0378	.0004	.0002	-.0007
	-0.06	-0.027	.0156	.0125	.0003	.0002	-.0009
	-0.01	-0.006	.0153	-.0041	.0001	.0002	-.0009
	0.004	0.012	.0155	-.0039	.0001	.0002	-.0009
	0.019	0.075	.0172	-.0303	.0000	.0002	-.0009
	0.038	0.159	.0239	-.0673	.0000	.0002	-.0009
	0.059	0.243	.0370	-.1030	.0000	.0001	-.0008
	0.080	0.332	.0577	-.1400	.0001	.0001	-.0007
	0.099	0.410	.0819	-.1721	.0001	.0001	-.0007
	0.118	0.490	.1117	-.2030	.0002	.0001	-.0005
	0.139	0.568	.1482	-.2319	.0002	.0000	-.0003
	0.159	0.646	.1904	-.2576	.0002	.0000	-.0001
	0.179	0.718	.2362	-.2766	.0000	.0000	.0002
1.70	-0.63	-0.242	.0398	.1013	.0003	.0000	.0000
	-0.42	-0.162	.0258	.0688	.0004	.0001	-.0002
	-0.22	-0.082	.0178	.0352	.0004	.0001	-.0004
	-0.07	-0.029	.0151	.0129	.0002	.0001	-.0005
	-0.02	-0.009	.0151	-.0055	.0001	.0001	-.0005
	0.003	0.009	.0150	-.0022	.0000	.0002	-.0005
	0.019	0.069	.0167	-.0265	.0001	.0001	-.0004
	0.038	0.141	.0227	-.0565	.0000	.0001	-.0003
	0.058	0.215	.0344	-.0871	.0000	.0001	-.0002
	0.079	0.289	.0517	-.1164	.0000	.0000	-.0001
	0.099	0.363	.0742	-.1448	.0000	.0000	-.0002
	0.118	0.429	.0999	-.1679	.0001	-0.0000	-.0001
	0.139	0.499	.1322	-.1899	.0001	-0.0000	.0000
	0.158	0.569	.1687	-.2075	.0002	.0000	.0003
	0.178	0.636	.2107	-.2201	.0002	.0001	.0001
1.90	-0.61	-0.214	.0359	.0868	.0002	-0.0000	.0001
	-0.41	-0.142	.0236	.0586	.0002	.0000	-.0001
	-0.19	-0.068	.0164	.0293	.0002	.0001	-.0003
	-0.05	-0.021	.0145	.0108	.0001	.0001	-.0003
	-0.00	-0.005	.0143	-.0046	.0001	.0001	-.0003
	0.005	0.013	.0144	-.0022	.0001	.0001	-.0004
	0.020	0.066	.0160	-.0236	.0001	.0000	-.0002
	0.040	0.134	.0219	-.0505	.0001	.0000	-.0002
	0.059	0.199	.0327	-.0759	.0000	.0000	-.0001
	0.080	0.267	.0490	-.1016	.0001	-0.0000	-.0001
	0.100	0.331	.0692	-.1239	.0000	-0.0000	-.0001
	0.120	0.394	.0936	-.1435	.0001	-0.0001	-.0003
	0.140	0.456	.1226	-.1594	.0002	-0.0000	-.0005
	0.160	0.521	.1576	-.1715	.0002	-0.0001	-.0005
	0.180	0.581	.1954	-.1824	.0001	.0000	-.0005
2.22	-0.58	-0.177	.0309	.0675	.0001	-0.0001	.0002
	-0.37	-0.116	.0209	.0446	.0001	-0.0001	.0000
	-0.17	-0.053	.0152	.0212	.0001	-0.0000	-.0001
	-0.02	-0.010	.0137	.0049	.0000	.0000	-.0003
	0.003	0.008	.0136	-.0020	.0001	.0000	-.0003
	0.008	0.022	.0138	-.0071	.0001	.0000	-.0002
	0.023	0.068	.0160	-.0248	.0002	.0001	-.0003
	0.042	0.126	.0219	-.0463	.0001	.0000	-.0002
	0.063	0.184	.0323	-.0674	.0001	.0000	-.0002
	0.083	0.243	.0468	-.0868	.0001	-0.0000	-.0002
	0.103	0.299	.0648	-.1029	.0001	-0.0000	-.0004
	0.123	0.357	.0875	-.1167	.0000	-0.0001	-.0005
	0.143	0.414	.1149	-.1278	.0000	-0.0001	-.0007
	0.163	0.476	.1474	-.1387	.0001	-0.0001	-.0006
	0.182	0.529	.1817	-.1471	.0001	-0.0001	-.0007

TABLE II.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 0^\circ$ - Continued(b) BVWC; $\delta = 0^\circ$

M	α , deg	C_L	C_D	C_M	C_i	C_Y	C_z	C_{z_c}	C_{z_c}
0.70	-0.63	-0.329	.0457	.0520	.0005	-0.004	.0020	-.0253	.0672
	-0.23	-0.108	.0158	.0212	.0007	-0.002	.0013	-.0069	.0198
	-0.08	-0.043	.0133	.0137	.0002	-0.001	.0009	-.0013	.0028
	-0.03	-0.022	.0134	.0106	.0000	-0.001	.0008	.0000	.0010
	0.002	-0.001	.0124	.0085	.0001	-0.001	.0008	.0018	-.0064
	0.017	.0063	.0138	.0010	.0002	-0.001	.0004	.0073	-.0239
	0.037	.0163	.0206	-.0135	.0001	.0000	.0002	.0156	-.0441
	0.057	.0269	.0352	-.0268	.0002	.0000	.0000	.0246	-.0671
	0.077	.0384	.0592	-.0416	.0001	.0002	-.0006	.0343	-.0907
	0.097	.0499	.0905	-.0538	.0000	.0002	-.0010	.0439	-.1131
	0.117	.0617	.1213	-.0668	.0001	.0004	-.0020	.0537	-.1353
	0.137	.0766	.1562	-.0818	.0001	.0006	-.0019	.0637	-.1575
	0.157	.0864	.1862	-.0918	.0001	.0008	-.0028	.0761	-.1807
	0.178	.0983	.2122	-.1033	.0006	.0008	-.0045	.0861	-.1999
0.90	-0.61	-0.338	.0462	.0669	.0004	-0.003	.0018	-.0258	.0852
	-0.41	-0.217	.0268	.0447	.0007	-0.003	.0017	-.0156	.0509
	-0.21	-0.110	.0165	.0262	.0005	-0.002	.0012	-.0068	.0230
	-0.06	-0.039	.0133	.0152	.0001	-0.001	.0007	-.0013	.0038
	-0.00	-0.015	.0132	.0112	-.0000	-0.001	.0006	.0007	-.0032
	0.004	.0004	.0131	.0077	-.0000	-0.000	.0005	.0022	-.0086
	0.019	.0077	.0146	-.0037	.0001	-.0000	.0003	.0083	-.0296
	0.040	.0188	.0234	-.0239	.0001	-.0000	.0001	.0173	-.0583
	0.059	.0308	.0412	-.0464	.0001	.0001	-.0003	.0267	-.0893
	0.079	.0432	.0684	-.0692	.0000	.0000	-.0005	.0364	-.1188
	0.099	.0562	.1053	-.0957	-.0000	.0002	-.0010	.0463	-.1502
	0.118	.0696	.1523	-.1279	-.0002	.0002	-.0020	.0566	-.1823
	0.140	.0838	.2127	-.1594	-.0001	.0003	-.0012	.0666	-.2216
	0.159	.0960	.2779	-.1900	.0001	.0004	-.0021	.0759	-.2456
	0.180	.1084	.3563	-.2212	.0007	.0006	-.0038	.0851	-.2781
0.95	-0.59	-0.362	.0525	.0938	.0004	-0.004	.0022	-.0250	.0859
	-0.39	-0.243	.0331	.0664	.0005	-0.004	.0022	-.0155	.0513
	-0.19	-0.124	.0203	.0373	.0002	-0.003	.0015	-.0065	.0215
	-0.04	-0.044	.0161	.0195	-.0001	-0.002	.0013	-.0007	.0000
	0.002	-0.016	.0160	.0125	-.0001	-0.001	.0010	.0005	-.0047
	0.006	.0009	.0159	.0067	.0000	-0.001	.0010	.0017	-.0090
	0.021	.0090	.0179	-.0131	-.0000	-0.002	.0009	.0085	-.0327
	0.042	.0217	.0303	-.0451	-.0000	-0.001	.0007	.0174	-.0623
	0.061	.0339	.0504	-.0747	.0000	-0.001	.0005	.0266	-.0929
	0.081	.0467	.0795	-.1038	.0001	-0.001	.0002	.0365	-.1286
	0.101	.0593	.1187	-.1316	.0001	-0.001	-.0002	.0465	-.1660
	0.121	.0718	.1661	-.1583	.0001	.0003	-.0012	.0561	-.2010
	0.141	.0841	.2235	-.1849	.0001	.0003	-.0013	.0668	-.2410
	0.161	.0968	.2908	-.2126	.0001	.0004	-.0016	.0759	-.2716
	0.181	.1076	.3624	-.2335	.0006	.0005	-.0029	.0844	-.2996
1.00	-0.57	-0.346	.0529	.0962	.0003	-0.003	.0017	-.0233	.0799
	-0.38	-0.229	.0337	.0656	.0003	-0.003	.0017	-.0150	.0524
	-0.02	-0.030	.0210	.0131	-.0001	-0.001	.0008	-.0017	.0000
	0.003	.0000	.0207	.0048	-.0001	-0.001	.0006	.0001	-.0000
	0.008	.0022	.0203	-.0002	-.0001	-0.001	.0006	.0027	-.0122
	0.022	.0105	.0235	-.0234	-.0001	-0.001	.0007	.0086	-.0340
	0.043	.0223	.0348	-.0546	-.0000	-0.001	.0005	.0178	-.0646
	0.063	.0342	.0540	-.0840	.0000	-0.000	.0003	.0259	-.0903
	0.082	.0461	.0819	-.1121	.0000	-0.001	.0002	.0350	-.1233
	0.102	.0583	.1196	-.1375	.0000	-0.001	-.0003	.0448	-.1587
	0.123	.0698	.1647	-.1604	.0001	.0002	-.0009	.0542	-.1941
	0.143	.0814	.2206	-.1830	.0002	.0003	-.0012	.0640	-.2324
	0.163	.0922	.2795	-.2023	.0001	.0004	-.0013	.0733	-.2735
	0.183	.1022	.3470	-.2213	.0008	.0005	-.0029	.0811	-.2905
1.05	-0.52	-0.343	.0523	.0861	.0001	-0.003	.0016	-.0239	.0817
	-0.32	-0.215	.0328	.0554	.0003	-0.003	.0016	-.0148	.0518
	-0.12	-0.111	.0229	.0307	.0001	-0.002	.0014	-.0062	.0215
	-0.03	-0.024	.0209	.0052	-.0001	-0.001	.0008	-.0006	.0016
	0.002	.0004	.0210	-.0011	-.0001	-0.001	.0008	.0011	-.0005
	0.007	.0024	.0210	-.0065	-.0001	-0.001	.0008	.0020	-.0097
	0.022	.0097	.0237	-.0233	-.0000	-0.000	.0004	.0074	-.0297
	0.042	.0205	.0317	-.0477	.0000	-0.000	.0004	.0162	-.0592
	0.061	.0315	.0508	-.0736	.0000	-0.001	.0005	.0240	-.0832
	0.082	.0435	.0791	-.1010	.0000	-0.001	.0002	.0328	-.1143
	0.101	.0546	.1126	-.1264	.0001	-0.001	-.0001	.0424	-.1494
	0.122	.0673	.1607	-.1572	.0003	.0003	-.0014	.0517	-.1878
	0.142	.0784	.2128	-.1777	.0003	.0003	-.0014	.0620	-.2249
	0.162	.0881	.2703	-.1959	.0002	.0005	-.0013	.0700	-.2528
	0.182	.0977	.3331	-.2131	.0009	.0005	-.0030	.0777	-.2799
1.10	-0.59	-0.348	.0529	.1068	.0005	-0.002	.0010	-.0224	.0793
	-0.39	-0.230	.0341	.0747	.0005	-0.002	.0007	-.0144	.0536
	-0.19	-0.114	.0234	.0416	.0004	-0.000	.0002	-.0057	.0214
	-0.04	-0.039	.0211	.0209	.0003	-0.001	.0008	-.0009	.0019
	0.002	-0.007	.0199	.0098	.0001	-0.001	.0006	.0003	-.0010
	0.006	.0010	.0205	.0055	-.0002	-0.001	.0001	.0019	-.0078
	0.021	.0080	.0235	-.0112	-.0000	-0.000	.0000	.0079	-.0208
	0.041	.0190	.0313	-.0387	.0000	-0.001	-.0002	.0165	-.0514
	0.061	.0307	.0491	-.0702	-.0000	-0.000	.0001	.0246	-.0855
	0.081	.0445	.0779	-.1155	.0000	-0.001	-.0002	.0330	-.1127
	0.101	.0557	.1122	-.1367	.0000	-0.000	-.0005	.0425	-.1518
	0.121	.0667	.1564	-.1553	.0003	.0002	-.0010	.0505	-.1762
	0.142	.0755	.2030	-.1617	.0002	.0003	-.0016	.0586	-.2044
	0.161	.0837	.2554	-.1828	.0003	.0004	-.0016	.0665	-.2336
	0.181	.0941	.3220	-.2074	.0010	.0005	-.0034	.0744	-.2666

TABLE II.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 0^\circ$ - Continued
 (b) BVWC; $\delta = 0^\circ$ - Concluded

M	α , deg	C_L	C_D	C_m	C_i	C_Y	C_z	C_{z_c}	C_{z_c}
1.30	-0.60	-0.296	.0443	.0775	.0003	-0.001	.0006	-.0217	.0855
	-0.40	-0.193	.0283	.0520	.0004	-0.000	.0003	-.0141	.0666
	-0.20	-0.095	.0194	.0269	.0005	.0001	-.0001	-.0066	.0289
	-0.05	-0.028	.0168	.0100	.0004	.0001	-.0002	-.0014	.0073
	-0.00	-0.008	.0164	.0055	.0002	.0002	-.0005	-.0001	.0012
	0.005	0.013	.0165	-.0005	.0001	.0001	-.0005	.0014	-.0056
	0.020	0.081	.0187	-.0173	.0001	.0001	-.0005	.0065	-.0250
	0.040	0.180	.0271	-.0407	.0001	.0001	-.0005	.0145	-.0571
	0.060	0.276	.0425	-.0622	.0001	.0001	-.0004	.0225	-.0878
	0.080	0.375	.0647	-.0845	.0000	.0001	-.0003	.0304	-.1164
	0.100	0.476	.0946	-.1083	.0001	.0001	-.0005	.0377	-.1426
	0.120	0.585	.1340	-.1349	.0001	.0001	-.0008	.0457	-.1707
	0.141	0.688	.1808	-.1610	.0000	.0000	-.0013	.0532	-.1978
	0.160	0.782	.2314	-.1799	.0003	.0001	-.0008	.0601	-.2210
	0.180	0.866	.2874	-.1926	.0009	.0001	-.0021	.0666	-.2450
1.50	-0.60	-0.262	.0424	.0618	.0002	-0.000	-.0001	-.0205	.0797
	-0.41	-0.180	.0283	.0434	.0002	-0.000	-.0002	-.0136	.0543
	-0.21	-0.092	.0199	.0237	.0003	.0001	-.0004	-.0065	.0257
	-0.06	-0.030	.0173	.0093	.0002	.0001	-.0004	-.0015	.0058
	-0.001	-0.010	.0170	.0047	.0000	.0001	-.0006	-.0000	.0002
	0.005	0.011	.0171	-.0012	.0000	.0002	-.0007	.0012	-.0049
	0.019	0.071	.0182	-.0160	.0001	.0002	-.0007	.0060	-.0226
	0.039	0.159	.0264	-.0361	.0000	.0002	-.0009	.0130	-.0510
	0.059	0.246	.0401	-.0534	.0000	.0002	-.0009	.0205	-.0814
	0.079	0.335	.0603	-.0715	.0000	.0002	-.0011	.0276	-.1079
	0.099	0.420	.0866	-.0889	.0000	.0001	-.0011	.0345	-.1324
	0.119	0.505	.1189	-.1052	.0002	.0001	-.0015	.0412	-.1567
	0.139	0.586	.1567	-.1213	.0003	.0001	-.0020	.0471	-.1787
	0.160	0.671	.2080	-.1377	.0003	.0002	-.0010	.0532	-.1987
	0.180	0.747	.2516	-.1502	.0008	.0002	-.0019	.0586	-.2187
1.70	-0.62	-0.241	.0405	.0532	.0002	-0.000	-.0000	-.0187	.0738
	-0.41	-0.164	.0271	.0392	.0002	-0.000	-.0000	-.0119	.0480
	-0.21	-0.083	.0188	.0227	.0003	.0000	-.0002	-.0051	.0216
	-0.06	-0.028	.0165	.0100	.0002	.0000	-.0002	-.0009	.0043
	-0.001	-0.008	.0163	.0058	.0000	.0001	-.0003	.0005	-.0017
	0.004	0.009	.0161	.0016	.0000	.0001	-.0003	.0017	-.0071
	0.019	0.065	.0179	-.0105	.0001	.0001	-.0005	.0063	-.0253
	0.039	0.145	.0248	-.0261	.0000	.0002	-.0005	.0130	-.0513
	0.059	0.223	.0368	-.0410	.0001	.0001	-.0007	.0197	-.0760
	0.079	0.298	.0548	-.0543	.0001	.0001	-.0007	.0257	-.0975
	0.099	0.373	.0779	-.0684	.0001	.0001	-.0008	.0314	-.1189
	0.119	0.450	.1071	-.0816	.0000	.0001	-.0012	.0376	-.1427
	0.139	0.526	.1419	-.0952	.0002	.0001	-.0012	.0430	-.1629
	0.159	0.594	.1806	-.1048	.0000	.0002	-.0007	.0484	-.1833
	0.179	0.661	.2236	-.1115	.0003	.0002	-.0013	.0533	-.2019
1.90	-0.60	-0.214	.0366	.0443	.0001	-0.000	-.0000	-.0162	.0631
	-0.40	-0.143	.0245	.0315	.0002	-0.000	-.0000	-.0105	.0411
	-0.20	-0.071	.0177	.0181	.0001	.0000	-.0002	-.0045	.0189
	-0.05	-0.018	.0154	.0076	.0001	.0000	-.0002	-.0003	.0016
	-0.001	-0.001	.0151	.0045	.0001	.0000	-.0002	.0008	-.0034
	0.005	0.012	.0153	.0015	.0001	.0000	-.0002	.0020	-.0083
	0.020	0.068	.0173	-.0097	.0001	.0001	-.0004	.0063	-.0249
	0.041	0.141	.0242	-.0226	.0001	.0001	-.0004	.0126	-.0494
	0.061	0.210	.0359	-.0345	.0001	.0001	-.0005	.0183	-.0709
	0.080	0.281	.0530	-.0467	.0000	.0001	-.0007	.0238	-.0906
	0.100	0.347	.0741	-.0568	.0000	.0001	-.0008	.0288	-.1087
	0.121	0.417	.1016	-.0677	.0001	.0000	-.0012	.0340	-.1278
	0.141	0.483	.1331	-.0763	.0001	.0000	-.0016	.0390	-.1462
	0.160	0.542	.1668	-.0812	.0000	.0002	-.0009	.0431	-.1618
	0.180	0.604	.2077	-.0824	.0002	.0002	-.0014	.0474	-.1774
2.22	-0.57	-0.182	.0326	.0304	.0001	.0000	-.0001	-.0146	.0557
	-0.37	-0.118	.0223	.0214	.0001	.0001	-.0004	-.0091	.0358
	-0.17	-0.054	.0165	.0119	.0001	.0000	-.0003	-.0033	.0138
	-0.01	-0.007	.0149	.0038	.0001	.0001	-.0006	.0003	-.0007
	0.003	0.006	.0146	.0014	.0001	.0001	-.0005	.0013	-.0031
	0.008	0.022	.0153	-.0013	.0001	.0001	-.0005	.0027	-.0108
	0.023	0.070	.0173	-.0100	.0001	.0001	-.0006	.0065	-.0252
	0.043	0.135	.0242	-.0196	.0002	.0001	-.0007	.0118	-.0454
	0.063	0.195	.0353	-.0279	.0001	.0001	-.0008	.0169	-.0635
	0.083	0.257	.0514	-.0364	.0001	.0001	-.0008	.0218	-.0796
	0.103	0.317	.0708	-.0431	.0001	.0001	-.0010	.0265	-.0956
	0.123	0.378	.0952	-.0488	.0001	.0001	-.0012	.0314	-.1140
	0.143	0.436	.1241	-.0514	.0002	.0001	-.0013	.0359	-.1315
	0.163	0.498	.1576	-.0525	.0003	.0001	-.0007	.0400	-.1478
	0.183	0.555	.1957	-.0512	.0004	.0001	-.0007	.0441	-.1649

TABLE II.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS
 AT $\beta = 0^\circ$ - Continued
 (c) BWVC; $\delta = 2.5^\circ$

M	α , deg	C_L	C_D	C_m	C_L	C_Y	C_n	C_{Zc}	C_{hc}
0.70	-0.64	-0.328	.0445	.0697	.0005	-0.0004	.0019	.0035	.0431
	-0.22	-0.100	.0151	.0322	.0007	-0.002	.0015	.0089	-.0008
	-0.03	-0.019	.0126	.0226	-.0000	-0.001	.0009	.0111	-.0208
	001.7	0.064	.0132	.0151	.0001	-0.001	.0005	.0135	-.0404
	005.7	0.275	.0374	-.0084	.0000	-0.000	.0002	.0190	-.0834
	009.8	0.507	.0949	-.0348	.0001	0.003	-.0014	.0250	-.1293
	013.7	0.756	.1891	-.0605	-.0002	0.003	-.0011	.0309	-.1765
	017.8	1.002	.3208	-.0870	.0003	0.009	-.0049	.0357	-.2051
0.90	-0.63	-0.349	.0466	.0879	.0007	-0.004	.0018	.0075	.0567
	-0.20	-0.103	.0149	.0378	.0006	-0.002	.0012	.0163	-.0007
	-0.01	-0.012	.0126	.0235	-.0001	-0.001	.0007	.0197	-.0249
	002.0	0.083	.0148	.0114	.0001	-0.001	.0003	.0239	-.0533
	005.9	0.305	.0423	-.0248	-.0000	0.000	-.0001	.0131	-.0497
	009.9	0.572	.1096	-.0770	-.0001	0.002	-.0014	.0376	-.1747
	013.9	0.841	.2180	-.1412	-.0005	0.002	-.0008	.0445	-.2415
	017.9	1.096	.3621	-.2068	.0008	0.008	-.0044	.0502	-.2885
1.00	-0.58	-0.354	.0518	.1159	.0004	-0.004	.0017	.0082	.0572
	-0.19	-0.110	.0214	.0478	.0005	-0.002	.0015	.0149	-.0019
	000.3	0.004	.0179	.0165	-.0002	-0.002	.0009	.0179	-.0307
	002.3	0.109	.0223	-.0088	-.0001	-0.001	.0007	.0211	-.0602
	006.3	0.348	.0547	-.0667	-.0000	-0.001	.0003	.0274	-.1132
	010.3	0.594	.1231	-.1203	-.0000	-0.001	-.0004	.0350	-.1836
	014.2	0.823	.2233	-.1662	-.0000	0.000	-.0006	.0419	-.2517
	018.2	1.047	.3570	-.2109	.0005	0.003	-.0021	.0490	-.3137
1.10	-0.60	-0.357	.0534	.1233	.0007	-0.001	.0009	.0071	.0621
	-0.19	-0.115	.0230	.0567	.0007	-0.002	.0007	.0138	-.0014
	000.1	-0.009	.0197	.0220	.0001	-0.000	.0004	.0163	-.0221
	002.1	0.090	.0225	-.0017	-.0000	0.001	.0001	.0193	-.0501
	006.0	0.311	.0493	-.0563	.0000	0.000	.0000		
	010.1	0.572	.1166	-.1239	.0001	0.000	-.0008	.0322	-.1679
	014.1	0.767	.2063	-.1461	.0002	0.002	-.0015	.0388	-.2277
	018.1	0.965	.3308	-.1970	.0009	0.007	-.0036	.0456	-.2911
1.30	-0.61	-0.303	.0444	.0957	.0004	-0.001	.0006	-.0028	.0632
	-0.19	-0.091	.0186	.0389	.0005	-0.000	.0001	.0039	.0035
	000.1	-0.004	.0165	.0162	.0001	0.000	-.0002	.0067	-.0231
	002.1	0.085	.0191	-.0033	.0000	0.000	-.0002	.0101	-.0537
	006.0	0.281	.0443	-.0487	-.0000	-0.000	-.0000	.0165	-.1122
	010.1	0.491	.1001	-.0984	-.0000	0.001	-.0008	.0226	-.1652
	014.0	0.699	.1848	-.1485	.0002	0.001	-.0009	.0282	-.2175
	018.0	0.882	.2960	-.1813	.0022	0.003	-.0051	.0340	-.2663
1.70	-0.63	-0.245	.0407	.0682	.0002	-0.000	-.0000	-.0024	.0541
	-0.22	-0.083	.0185	.0352	.0003	-0.000	-.0001	.0037	.0010
	-0.01	-0.009	.0163	.0184	.0001	0.000	-.0003	.0062	-.0226
	001.9	0.066	.0185	.0041	-.0000	0.000	-.0004	.0089	-.0480
	005.9	0.225	.0387	-.0265	-.0001	0.002	-.0007	.0142	-.0955
	009.9	0.380	.0814	-.0564	.0001	0.001	-.0013	.0190	-.1375
	013.8	0.533	.1453	-.0842	-.0002	0.001	-.0001	.0238	-.1805
	017.8	0.671	.2284	-.1033	.0008	0.003	-.0021	.0281	-.2179
2.22	-0.58	-0.188	.0325	.0443	.0000	-0.000	.0000	-.0025	.0413
	-0.18	-0.054	.0163	.0237	.0001	0.001	-.0003	.0026	-.0023
	000.4	0.007	.0151	.0135	-.0001	0.001	-.0004	.0049	-.0232
	002.4	0.071	.0175	.0036	-.0002	0.001	-.0004	.0071	-.0444
	006.3	0.198	.0365	-.0163	-.0001	0.000	-.0006	.0112	-.0804
	010.3	0.322	.0731	-.0347	-.0001	-0.000	-.0010	.0151	-.1131
	014.3	0.444	.1274	-.0450	-.0004	0.000	-.0006	.0195	-.1473
	018.3	0.565	.2004	-.0467	.0002	-0.000	-.0019	.0242	-.1803

TABLE II.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 0^\circ$ - Continued(d) BVWC; $\delta = 5.2^\circ$

M	α , deg	C_L	C_D	C_m	C_l	C_Y	C_n	C_{Zc}	C_{hc}
0.70	-0.63	-0.305	.0407	.0806	.0005	-0.0002	.0017	-0.0094	.0271
	-0.23	-0.097	.0150	.0422	.0008	-0.0001	.0011	.0041	-.0127
	-0.03	-0.014	.0131	.0333	.0001	-0.0000	.0005	.0120	-.0346
	0.017	0.069	.0146	.0265	.0002	0.0000	.0002	.0210	-.0564
	0.058	0.279	.0399	.0053	.0002	0.0000	-.0001	.0399	-.1003
	0.097	0.506	.0968	-.0197	-.0000	0.0001	-.0009	.0596	-.1451
	0.136	0.750	.1899	-.0440	.0001	0.0006	-.0022		
	0.177	1.003	.3250	-.0896	.0001	0.0009	-.0033	.0943	-.2061
0.90	-0.61	-0.324	.0425	.0995	.0007	-0.0002	.0015	-0.0095	.0325
	-0.21	-0.102	.0150	.0486	.0006	-0.0001	.0009	.0047	-.0163
	0.000	-0.006	.0130	.0356	-.0000	-0.0000	.0004	.0137	-.0450
	0.019	0.083	.0155	.0231	.0002	0.0000	.0001	.0228	-.0746
	0.059	0.313	.0450	-.0111	.0001	0.0001	-.0004	.0424	-.1346
	0.099	0.574	.1120	-.0630	-.0001	0.0001	-.0010	.0617	-.1956
	0.139	0.838	.2191	-.1247	-.0003	0.0005	-.0016	.0797	-.2525
	0.179	1.081	.3585	-.2041	.0011	0.016	-.0037	.0879	-.2578
1.00	-0.57	-0.340	.0491	.1296	.0004	-0.0004	.0020	-0.0085	.0285
	-0.17	-0.100	.0227	.0571	.0005	-0.0003	.0017	.0045	-.0184
	0.003	0.003	.0198	.0306	-.0002	-0.0002	.0009	.0137	-.0504
	0.023	0.109	.0246	.0047	-.0001	-0.0002	.0007	.0222	-.0776
	0.063	0.348	.0578	-.0499	-.0000	-0.0001	.0001	.0413	-.1442
	0.102	0.589	.1251	-.1035	.0000	0.0002	-.0008	.0599	-.2127
	0.143	0.819	.2256	-.1488	-.0002	0.0004	-.0010	.0777	-.2773
	0.183	1.029	.3567	-.1949	.0004	0.006	-.0027	.0936	-.3370
1.10	-0.59	-0.354	.0521	.1408	.0005	-0.0004	.0016	-0.0082	.0286
	-0.19	-0.114	.0228	.0670	.0004	-0.0003	.0011	.0052	-.0219
	0.002	-0.012	.0197	.0376	-.0000	-0.0002	.0009	.0130	-.0468
	0.021	0.087	.0238	.0146	-.0002	-0.0001	.0003	.0222	-.0794
	0.061	0.311	.0541	-.0371	-.0001	-0.0001	-.0003	.0395	-.1390
	0.101	0.565	.1181	-.1092	-.0001	-0.0001	-.0002	.0561	-.1952
	0.142	0.762	.2103	-.1321	-.0000	0.0001	-.0010	.0719	-.2542
	0.181	0.943	.3285	-.1801	.0005	0.004	-.0025	.0859	-.3108
1.30	-0.60	-0.289	.0428	.1061	.0005	-0.0001	.0005	-0.0086	.0363
	-0.20	-0.095	.0193	.0517	.0005	0.0000	-.0001	.0040	-.0151
	0.001	-0.007	.0171	.0309	.0001	0.0001	-.0003	.0118	-.0451
	0.020	0.076	.0197	.0124	.0001	0.0001	-.0003	.0195	-.0733
	0.060	0.281	.0460	-.0345	.0000	0.0001	-.0004	.0353	-.1329
	0.100	0.491	.1015	-.0868	-.0001	0.0001	-.0007	.0505	-.1863
	0.140	0.693	.1860	-.1352	-.0001	0.0002	-.0010	.0642	-.2352
	0.180	0.872	.2961	-.1707	.0010	0.003	-.0030	.0761	-.2797
1.70	-0.62	-0.235	.0390	.0816	.0002	-0.0001	.0002	-0.0066	.0285
	-0.22	-0.084	.0193	.0472	.0003	-0.0000	-.0001	.0047	-.0175
	-0.01	-0.012	.0172	.0317	.0001	0.0000	-.0003	.0111	-.0417
	0.019	0.060	.0193	.0177	-.0000	0.0000	-.0004	.0177	-.0657
	0.059	0.222	.0402	-.0136	-.0001	0.0001	-.0007	.0302	-.1120
	0.099	0.376	.0821	-.0457	-.0001	0.0002	-.0008	.0415	-.1533
	0.138	0.525	.1461	-.0733	-.0001	0.0002	-.0011	.0517	-.1934
	0.179	0.662	.2304	-.0936	.0005	0.002	-.0026	.0615	-.2300
2.22	-0.58	-0.175	.0309	.0534	.0000	-0.0001	.0002	-.0049	.0219
	-0.17	-0.052	.0166	.0335	.0001	-0.0000	-.0001	.0054	-.0179
	0.004	0.009	.0158	.0240	-.0001	-0.0000	-.0002	.0109	-.0387
	0.024	0.072	.0186	.0133	-.0001	0.0001	-.0005	.0162	-.0589
	0.064	0.199	.0385	-.0066	-.0001	0.0001	-.0007	.0257	-.0921
	0.103	0.318	.0742	-.0252	-.0001	0.0001	-.0008	.0345	-.1216
	0.144	0.436	.1285	-.0358	-.0002	0.0001	-.0010	.0434	-.1568
	0.183	0.549	.1981	-.0356	-.0006	0.0001	-.0004	.0517	-.1921

TABLE II.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 0^\circ$ - Continued(e) BVWC; $\delta = 9.7^\circ$

M	α , deg	C_L	C_D	C_m	C_l	C_y	C_n	C_{Zc}	C_{hc}
0.70	-0.63	-0.290	.0390	.1049	.0008	-0.001	.0016	.0033	-.0133
	-0.23	-0.089	.0165	.0702	.0010	-0.001	.0013	.0184	-.0517
	-0.02	-0.002	.0158	.0615	.0001	-0.001	.0009	.0275	-.0744
	0.017	0.074	.0183	.0531	.0002	-0.001	.0006	.0366	-.0961
	0.057	0.279	.0464	.0371	.0002	-0.002	.0006	.0561	-.1398
	0.095	0.514	.1043	.0125	-0.001	-0.001	.0001	.0749	-.1782
	0.137	0.761	.2031	-.0146	-0.003	0.001	-0.001	.0947	-.2199
	0.177	0.993	.3296	-.0804	.0002	0.010	-0.019	.0924	-.1995
0.90	-0.21	-0.098	.0175	.0786	.0007	-0.002	.0012	.0192	-.0630
	-0.00	-0.008	.0171	.0666	.0001	-0.001	.0008	.0285	-.0923
	0.019	0.079	.0200	.0513	.0003	-0.001	.0007	.0377	-.1210
	0.059	0.296	.0509	.0228	.0000	-0.003	.0006	.0567	-.1799
	0.100	0.553	.1195	-.0269	-0.002	-0.001	-0.002	.0746	-.2391
	0.140	0.801	.2215	-.1046	-0.003	0.001	-0.007	.0832	-.2235
	0.180	1.036	.3553	-.2004	.0000	0.004	-0.016	.0802	-.2192
1.00	-0.58	-0.353	.0517	.1618	.0004	-0.001	.0015	.0030	-.0197
	-0.17	-0.103	.0250	.0880	.0006	-0.002	.0017	.0190	-.0715
	0.003	0.002	.0243	.0608	-0.000	-0.001	.0008	.0285	-.1046
	0.023	0.100	.0298	.0323	-0.000	-0.002	.0010	.0380	-.1390
	0.063	0.331	.0624	-.0166	-0.001	-0.002	.0008	.0550	-.1984
	0.103	0.563	.1306	-.0651	-0.001	-0.002	.0003	.0722	-.2621
	0.143	0.790	.2298	-.1146	-0.003	-0.002	.0002	.0880	-.3175
	0.182	0.984	.3540	-.1584	.0003	0.001	-0.012	.1008	-.3644
1.10	-0.59	-0.355	.0526	.1688	.0006	-0.001	.0011	.0027	-.0168
	-0.19	-0.111	.0235	.0948	.0007	-0.001	.0009	.0183	-.0675
	0.002	-0.008	.0244	.0664	.0004	-0.002	.0012	.0267	-.0960
	0.021	0.083	.0282	.0403	.0001	-0.000	.0001	.0364	-.1368
	0.061	0.294	.0600	-.0057	-0.001	-0.002	.0004	.0519	-.1846
	0.101	0.549	.1251	-.0774	-0.001	-0.001	-0.001	.0672	-.2391
	0.142	0.753	.2178	-.1128	.0001	-0.001	-0.002	.0805	-.2893
	0.182	0.915	.3222	-.1490	.0003	0.001	-0.012	.0934	-.3378
1.30	-0.60	-0.292	.0441	.1351	.0005	-0.000	.0005	.0029	-.0131
	-0.20	-0.094	.0215	.0810	.0007	-0.000	.0004	.0173	-.0669
	0.001	-0.008	.0198	.0593	.0002	-0.000	.0001	.0252	-.0962
	0.020	0.071	.0235	.0349	.0000	-0.001	.0003	.0325	-.1232
	0.060	0.273	.0512	-.0115	-0.001	-0.002	.0004	.0470	-.1784
	0.100	0.476	.1057	-.0598	-0.004	-0.001	.0004	.0605	-.2255
	0.140	0.669	.1901	-.1096	-0.001	-0.001	-0.006	.0726	-.2665
	0.181	0.843	.2989	-.1445	.0006	0.000	-0.016	.0835	-.3097
1.70	-0.62	-0.223	.0381	.1042	.0002	-0.000	.0001	.0042	-.0142
	-0.21	-0.076	.0208	.0710	.0005	-0.000	.0000	.0160	-.0579
	-0.01	-0.008	.0199	.0543	.0002	-0.000	.0001	.0221	-.0811
	0.019	0.059	.0223	.0366	.0001	-0.001	-0.000	.0281	-.1030
	0.059	0.226	.0450	.0040	-0.001	-0.000	-0.001	.0396	-.1457
	0.098	0.379	.0878	-.0270	-0.002	-0.000	-0.004	.0500	-.1843
	0.138	0.529	.1535	-.0596	-0.002	-0.000	-0.005	.0601	-.2249
	0.178	0.662	.2368	-.0793	.0002	-0.000	-0.009	.0694	-.2632
2.22	-0.58	-0.166	.0302	.0758	.0000	-0.000	.0001	.0049	-.0137
	-0.16	-0.043	.0182	.0547	.0001	-0.001	.0000	.0153	-.0510
	0.003	0.011	.0182	.0443	-0.001	-0.001	.0001	.0201	-.0702
	0.023	0.068	.0211	.0319	-0.001	-0.001	-0.001	.0249	-.0894
	0.063	0.201	.0422	.0102	-0.001	-0.000	-0.001	.0337	-.1192
	0.104	0.324	.0804	-.0108	-0.002	-0.001	-0.002	.0424	-.1495
	0.144	0.438	.1345	-.0231	-0.002	-0.002	-0.006	.0512	-.1867
	0.182	0.546	.2031	-.0223	-0.005	-0.001	.0000	.0587	-.2188

TABLE II.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 0^\circ$ - Concluded(f) BVWC; $\delta = 19.5^\circ$

M	α , deg	C_L	C_D	C_m	C_l	C_y	C_n	C_{Zc}	C_{Pc}
0.70	-0.63	-0.289	.0491	.1575	.0010	-0.001	.0015	.0283	-.0867
	-0.23	-0.078	.0287	.1233	.0012	-0.001	.0013	.0454	-.1286
	-0.02	0.008	.0308	.1150	.0004	0.000	.0005	.0548	-.1502
	0.017	0.082	.0349	.1048	.0005	-0.000	.0003	.0636	-.1687
	0.057	0.278	.0648	.0814	-0.001	-0.000	.0008	.0796	-.1991
	0.097	0.517	.1268	.0416	-0.001	0.000	-0.003	.0914	-.2183
	0.137	0.741	.2130	-.0305	-0.014	0.008	-0.027	.0873	-.2086
	0.178	0.971	.3357	-.1077	-0.002	0.008	-0.012	.0839	-.2356
0.90	-0.61	-0.309	.0521	.1789	.0010	-0.001	.0014	.0296	-.1046
	-0.20	-0.078	.0295	.1314	.0009	-0.000	.0009	.0474	-.1623
	-0.00	0.010	.0311	.1162	.0003	0.001	.0003	.0560	-.1875
	0.020	0.095	.0350	.0962	.0004	0.000	.0002	.0646	-.2153
	0.059	0.313	.0701	.0592	.0000	0.000	.0001	.0801	-.2561
	0.100	0.572	.1366	-.0194	-0.003	0.001	-0.000	.0831	-.2458
	0.140	0.832	.2413	-.1189	-0.006	0.004	-0.003	.0839	-.2571
	0.180	1.076	.3820	-.2093	-0.002	0.008	-0.018	.0887	-.2779
1.00	-0.57	-0.326	.0605	.2099	.0006	-0.002	.0018	.0291	-.1162
	-0.15	-0.080	.0359	.1383	.0007	-0.002	.0016	.0470	-.1792
	0.003	0.012	.0374	.1125	.0001	-0.001	.0009	.0546	-.2064
	0.023	0.112	.0443	.0768	.0000	-0.002	.0004	.0632	-.2377
	0.063	0.351	.0813	.0212	-0.001	-0.002	.0010	.0789	-.2963
	0.103	0.591	.1527	-.0373	-0.003	-0.002	.0005	.0912	-.3350
	0.143	0.814	.2513	-.1105	-0.003	0.001	-0.006	.0961	-.3310
	0.183	1.024	.3801	-.1729	.0006	0.005	-0.021	.1017	-.3558
1.10	-0.59	-0.338	.0612	.2188	.0008	-0.002	.0015	.0279	-.1109
	-0.19	-0.094	.0371	.1438	.0008	-0.001	.0008	.0445	-.1727
	0.001	0.002	.0378	.1107	.0001	-0.000	.0002	.0520	-.2001
	0.021	0.088	.0428	.0795	-0.001	-0.001	.0005	.0595	-.2270
	0.061	0.311	.0780	.0258	-0.002	-0.001	.0005	.0728	-.2752
	0.101	0.566	.1443	-.0499	-0.002	-0.000	.0002	.0842	-.3079
	0.142	0.778	.2392	-.0970	-0.007	-0.001	.0010	.0927	-.3306
	0.181	0.944	.3518	-.1639	.0003	0.003	-0.013	.0947	-.3326
1.30	-0.60	-0.274	.0510	.1797	.0006	-0.001	.0007	.0263	-.1070
	-0.19	-0.075	.0314	.1194	.0006	-0.001	.0005	.0400	-.1591
	0.000	0.005	.0317	.0948	.0003	-0.001	.0003	.0465	-.1824
	0.020	0.083	.0359	.0659	.0001	-0.001	.0001	.0532	-.2083
	0.060	0.293	.0673	.0153	-0.002	-0.002	.0003	.0659	-.2574
	0.100	0.508	.1274	-.0425	-0.003	-0.001	.0003	.0769	-.2936
	0.140	0.697	.2126	-.0973	.0000	0.000	-0.011	.0869	-.3335
	0.181	0.870	.3219	-.1521	.0007	0.006	-0.030	.0907	-.3341
1.70	-0.61	-0.222	.0457	.1470	.0003	-0.000	.0001	.0228	-.0851
	-0.20	-0.069	.0301	.1080	.0005	-0.000	-0.001	.0339	-.1276
	-0.01	-0.007	.0303	.0908	.0003	0.000	-0.003	.0391	-.1481
	0.019	0.058	.0332	.0706	-0.002	0.000	-0.002	.0444	-.1702
	0.059	0.227	.0576	.0338	-0.002	-0.000	-0.004	.0541	-.2092
	0.099	0.385	.1036	-.0078	.0000	0.000	-0.012	.0635	-.2469
	0.139	0.528	.1685	-.0423	-0.004	0.001	-0.008	.0724	-.2824
2.22	-0.57	-0.156	.0366	.1078	.0002	0.001	-0.005	.0205	-.0658
	-0.16	-0.032	.0265	.0837	.0001	0.000	-0.006	.0302	-.1032
	0.004	0.020	.0277	.0724	-0.001	0.001	-0.007	.0348	-.1226
	0.023	0.076	.0310	.0564	-0.001	0.001	-0.005	.0390	-.1412
	0.063	0.210	.0536	.0310	-0.001	0.001	-0.009	.0469	-.1730
	0.103	0.328	.0925	.0070	-0.001	0.001	-0.011	.0546	-.2016
	0.143	0.443	.1478	-.0062	-0.003	0.001	-0.007	.0636	-.2432
	0.183	0.556	.2214	-.0061	-0.003	0.000	-0.009	.0729	-.2916

TABLE III.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS
 AT $\beta = 5^\circ$
 (a) BVW

M	α , deg	C_L	C_D	C_m	C_l	C_Y	C_n
0.70	-0.6.0	-0.295	.0423	.0990	-.0007	-0.065	.0265
	-0.1.8	-0.090	.0178	.0340	-.0051	-0.059	.0239
	0.0.1	-0.015	.0151	.0108	-.0073	-0.056	.0223
	0.01.9	0.061	.0160	-.0119	-.0084	-0.056	.0217
	0.06.0	0.267	.0381	-.0802	-.0117	-0.055	.0199
	0.10.0	0.484	.0913	-.1492	-.0147	-0.056	.0185
	0.14.0	0.704	.1765	-.2167	-.0160	-0.058	.0171
	0.17.8	0.883	.2801	-.2699	-.0119	-0.056	.0139
0.90	-0.6.0	-0.308	.0447	.1147	-.0005	-0.069	.0293
	-0.1.8	-0.086	.0179	.0357	-.0057	-0.062	.0259
	0.0.1	-0.008	.0153	.0098	-.0080	-0.058	.0240
	0.02.0	0.082	.0168	-.0204	-.0094	-0.058	.0233
	0.06.0	0.308	.0433	-.1049	-.0132	-0.058	.0217
	0.10.0	0.551	.1050	-.1984	-.0165	-0.058	.0197
	0.14.1	0.801	.2069	-.3040	-.0171	-0.061	.0187
	0.17.8	0.970	.3173	-.3648	-.0075	-0.068	.0197
1.00	-0.6.0	-0.327	.0558	.1476	-.0035	-0.081	.0365
	-0.1.8	-0.082	.0231	.0395	-.0077	-0.070	.0314
	0.0.1	0.011	.0253	.0007	-.0109	-0.069	.0306
	0.02.0	0.112	.0253	-.0423	-.0119	-0.066	.0280
	0.06.1	0.356	.0552	-.1497	-.0155	-0.067	.0283
	0.10.0	0.581	.1179	-.2452	-.0184	-0.068	.0275
	0.14.1	0.792	.2116	-.3317	-.0194	-0.069	.0255
	0.17.8	0.968	.3210	-.4055	-.0202	-0.062	.0215
1.10	-0.5.9	-0.329	.0554	.1523	-.0025	-0.080	.0364
	-0.1.8	-0.096	.0266	.0492	-.0072	-0.068	.0311
	0.0.1	-0.012	.0248	.0115	-.0104	-0.063	.0286
	0.02.0	0.088	.0252	-.0303	-.0122	-0.061	.0273
	0.06.0	0.313	.0509	-.1284	-.0147	-0.060	.0253
	0.10.0	0.546	.1112	-.2300	-.0187	-0.068	.0284
	0.14.0	0.721	.1949	-.3005	-.0175	-0.064	.0232
	0.17.8	0.891	.2971	-.3728	-.0184	-0.054	.0165
1.30	-0.6.0	-0.281	.0465	.1245	-.0041	-0.064	.0265
	-0.1.8	-0.077	.0217	.0351	-.0070	-0.057	.0241
	0.0.1	0.001	.0195	.0024	-.0090	-0.053	.0222
	0.02.0	0.086	.0213	-.0326	-.0104	-0.053	.0212
	0.06.1	0.280	.0449	-.1173	-.0125	-0.050	.0181
	0.10.0	0.468	.0946	-.1966	-.0128	-0.048	.0138
	0.14.0	0.643	.1692	-.2670	-.0125	-0.044	.0077
	0.17.8	0.796	.2603	-.3242	-.0112	-0.039	.0002
1.70	-0.6.1	-0.229	.0423	.0965	-.0047	-0.058	.0199
	-0.1.8	-0.068	.0212	.0298	-.0062	-0.050	.0171
	0.0.1	-0.005	.0189	.0043	-.0075	-0.046	.0157
	0.02.0	0.068	.0210	-.0251	-.0085	-0.046	.0146
	0.06.0	0.220	.0393	-.0875	-.0096	-0.044	.0114
	0.10.0	0.359	.0773	-.1407	-.0091	-0.042	.0059
	0.14.0	0.490	.1335	-.1832	-.0087	-0.039	-.0019
	0.17.8	0.615	.2056	-.2112	-.0082	-0.035	-.0102
2.22	-0.6.1	-0.171	.0350	.0652	-.0042	-0.050	.0131
	-0.1.8	-0.043	.0187	.0176	-.0049	-0.040	.0100
	0.0.1	0.011	.0172	-.0029	-.0055	-0.038	.0086
	0.02.0	0.069	.0190	-.0251	-.0060	-0.037	.0074
	0.06.0	0.189	.0347	-.0679	-.0066	-0.037	.0036
	0.10.0	0.300	.0665	-.1006	-.0069	-0.036	-.0026
	0.14.0	0.411	.1158	-.1227	-.0069	-0.038	-.0093
	0.17.8	0.513	.1768	-.1419	-.0069	-0.040	-.0126

TABLE III.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 5^\circ$ - Continued(b) BVWC; $\delta = 0^\circ$

M	α , deg	C_L	C_D	C_m	C_{L_i}	C_{Y_i}	C_n
0.70	-0.60	-0.305	.0440	.0434	.0025	-0.060	.0266
	-0.19	-0.094	.0182	.0201	-.0042	-0.058	.0236
	-0.00	-0.017	.0159	.0111	-.0073	-0.057	.0224
	0.020	0.064	.0168	.0042	-.0098	-0.055	.0218
	0.059	0.267	.0385	-.0209	-.0158	-0.047	.0194
	0.100	0.512	.0959	-.0506	-.0195	-0.037	.0133
	0.140	0.754	.1888	-.0775	-.0180	-0.024	.0018
	0.178	0.975	.3078	-.0956	-.0153	-0.012	-.0041
0.90	-0.59	-0.313	.0455	.0584	.0029	-0.064	.0296
	-0.18	-0.089	.0184	.0237	-.0049	-0.061	.0255
	0.001	-0.007	.0161	.0114	-.0083	-0.058	.0240
	0.019	0.075	.0177	.0012	-.0108	-0.057	.0233
	0.060	0.313	.0441	-.0399	-.0183	-0.049	.0207
	0.100	0.576	.1089	-.0899	-.0217	-0.035	.0126
	0.141	0.844	.2167	-.1539	-.0183	-0.023	.0007
	0.178	1.077	.3481	-.2009	-.0144	-0.011	-.0039
1.00	-0.61	-0.347	.0597	.0951	-.0001	-0.076	.0365
	-0.17	-0.088	.0272	.0283	-.0074	-0.071	.0317
	0.001	0.008	.0225	.0035	-.0107	-0.067	.0292
	0.020	0.110	.0282	-.0215	-.0138	-0.067	.0294
	0.061	0.362	.0586	-.0844	-.0203	-0.058	.0273
	0.100	0.602	.1227	-.1379	-.0212	-0.044	.0176
	0.141	0.837	.2217	-.1830	-.0174	-0.029	.0072
	0.179	1.035	.3419	-.2201	-.0142	-0.019	.0024
1.10	-0.59	-0.332	.0563	.0972	.0002	-0.071	.0349
	-0.17	-0.091	.0276	.0322	-.0068	-0.066	.0299
	0.001	-0.003	.0247	.0086	-.0103	-0.064	.0281
	0.020	0.091	.0273	-.0128	-.0135	-0.060	.0268
	0.060	0.318	.0531	-.0665	-.0193	-0.052	.0239
	0.100	0.574	.1161	-.1343	-.0212	-0.040	.0167
	0.140	0.770	.2047	-.1597	-.0165	-0.030	.0071
	0.177	0.945	.3141	-.2030	-.0130	-0.020	.0020
1.30	-0.61	-0.290	.0485	.0733	-.0015	-0.059	.0271
	-0.18	-0.080	.0229	.0225	-.0062	-0.056	.0241
	0.001	0.001	.0204	.0035	-.0091	-0.054	.0223
	0.021	0.088	.0228	-.0165	-.0117	-0.052	.0212
	0.060	0.288	.0463	-.0627	-.0157	-0.043	.0170
	0.100	0.494	.0998	-.1083	-.0152	-0.031	.0086
	0.141	0.698	.1842	-.1574	-.0125	-0.029	.0047
	0.178	0.869	.2857	-.1908	-.0081	-0.023	-.0014
1.70	-0.60	-0.235	.0437	.0497	-.0019	-0.055	.0206
	-0.18	-0.069	.0221	.0189	-.0053	-0.050	.0172
	0.001	-0.005	.0200	.0061	-.0076	-0.047	.0155
	0.020	0.069	.0220	-.0086	-.0097	-0.044	.0138
	0.060	0.229	.0409	-.0384	-.0121	-0.035	.0081
	0.100	0.389	.0837	-.0669	-.0105	-0.031	.0022
	0.141	0.536	.1476	-.0914	-.0083	-0.028	-.0025
	0.179	0.665	.2255	-.1051	-.0049	-0.020	-.0100
2.22	-0.59	-0.175	.0360	.0284	-.0022	-0.047	.0134
	-0.17	-0.043	.0192	.0088	-.0044	-0.040	.0101
	0.001	0.010	.0180	.0011	-.0057	-0.038	.0085
	0.020	0.071	.0201	-.0086	-.0070	-0.036	.0069
	0.061	0.200	.0370	-.0258	-.0082	-0.031	.0021
	0.100	0.325	.0724	-.0407	-.0077	-0.030	-.0019
	0.140	0.446	.1251	-.0491	-.0072	-0.028	-.0064
	0.179	0.555	.1924	-.0517	-.0054	-0.026	-.0106

TABLE III.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 5^\circ$ - Continued(c) BVWC; $\delta = 9.7^\circ$

M	α , deg	C_L	C_D	C_m	C_{L_i}	C_{Y_i}	C_n
0.70	-0.61	-0.511	.0450	.1121	-.0015	-.0064	.0244
	-0.17	-0.081	.0205	.0749	-.0074	-.0063	.0231
	0.001	-0.007	.0204	.0686	-.0103	-.0061	.0224
	0.020	0.073	.0232	.0602	-.0130	-.0058	.0215
	0.060	0.289	.0511	.0407	-.0206	-.0047	.0219
	0.099	0.516	.1090	.0194	-.0254	-.0029	.0151
	0.140	0.758	.2040	-.0239	-.0250	-.0009	.0131
	0.177	0.974	.3192	-.0712	-.0221	0.0008	.0162
0.90	-0.61	-0.331	.0489	.1337	-.0013	-.0069	.0274
	-0.18	-0.088	.0216	.0824	-.0077	-.0066	.0254
	0.001	-0.003	.0210	.0712	-.0111	-.0064	.0243
	0.021	0.089	.0243	.0584	-.0142	-.0060	.0228
	0.061	0.326	.0567	.0250	-.0223	-.0050	.0235
	0.100	0.585	.1238	-.0234	-.0278	-.0029	.0154
	0.140	0.851	.2295	-.1087	-.0267	-.0008	.0156
	0.179	1.086	.3644	-.1914	-.0208	0.0007	.0071
1.00	-0.61	-0.336	.0585	.1604	-.0041	-.0077	.0343
	-0.17	-0.079	.0286	.0863	-.0106	-.0073	.0309
	0.001	0.014	.0284	.0636	-.0139	-.0071	.0298
	0.020	0.113	.0326	.0386	-.0168	-.0066	.0276
	0.060	0.366	.0679	-.0185	-.0254	-.0060	.0302
	0.100	0.613	.1358	-.0699	-.0274	-.0035	.0193
	0.141	0.843	.2367	-.1205	-.0237	-.0015	.0104
	0.178	1.026	.3527	-.1690	-.0178	-.0001	.0042
1.10	-0.60	-0.342	.0581	.1661	-.0031	-.0076	.0338
	-0.17	-0.090	.0301	.0928	-.0109	-.0069	.0283
	0.001	-0.002	.0293	.0697	-.0140	-.0067	.0276
	0.019	0.083	.0329	.0498	-.0170	-.0063	.0259
	0.061	0.329	.0650	-.0077	-.0243	-.0052	.0255
	0.101	0.587	.1322	-.0779	-.0254	-.0032	.0160
	0.141	0.785	.2223	-.1082	-.0218	-.0015	.0082
	0.178	0.951	.3343	-.1573	-.0157	-.0003	.0034
1.30	-0.60	-0.284	.0481	.1347	-.0047	-.0064	.0258
	-0.18	-0.079	.0257	.0805	-.0099	-.0061	.0242
	0.001	0.002	.0239	.0611	-.0125	-.0059	.0230
	0.020	0.081	.0276	.0409	-.0150	-.0056	.0217
	0.061	0.300	.0564	-.0114	-.0195	-.0047	.0202
	0.099	0.512	.1120	-.0662	-.0202	-.0030	.0141
	0.140	0.712	.1989	-.1148	-.0173	-.0020	.0120
	0.179	0.878	.3039	-.1544	-.0114	-.0011	.0091
1.70	-0.60	-0.229	.0433	.1048	-.0048	-.0057	.0195
	-0.17	-0.067	.0246	.0713	-.0090	-.0051	.0158
	0.001	0.001	.0238	.0567	-.0112	-.0047	.0137
	0.020	0.063	.0264	.0438	-.0134	-.0043	.0111
	0.060	0.235	.0491	.0081	-.0153	-.0034	.0074
	0.100	0.391	.0922	-.0228	-.0143	-.0024	.0046
	0.139	0.535	.1557	-.0510	-.0118	-.0016	.0026
	0.179	0.666	.2378	-.0768	-.0068	-.0009	.0065
2.22	-0.60	-0.169	.0361	.0748	-.0043	-.0048	.0133
	-0.17	-0.037	.0218	.0534	-.0072	-.0042	.0095
	0.001	0.014	.0216	.0447	-.0084	-.0039	.0072
	0.020	0.071	.0244	.0354	-.0097	-.0036	.0052
	0.061	0.210	.0443	.0116	-.0108	-.0029	.0019
	0.100	0.331	.0812	-.0060	-.0102	-.0025	.0004
	0.141	0.450	.1361	-.0207	-.0083	-.0023	-.0048
	0.178	0.554	.2004	-.0247	-.0087	-.0016	-.0059

TABLE III.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 5^\circ$ - Continued(d) BWC; $\delta = 0^\circ$

M	α , deg	C_L	C_D	C_m	C_z	C_Y	C_n
0.70	-0.59	-0.315	.0404	.0524	.0083	-0.006	-.0078
	-0.17	-0.093	.0141	.0226	.0025	-0.006	-.0090
	0.001	-0.017	.0116	.0111	.0000	-0.005	-.0093
	0.020	0.061	.0129	.0016	-.0033	-0.004	-.0096
	0.060	0.264	.0343	-.0241	-.0093	-0.003	-.0088
	0.100	0.498	.0908	-.0509	-.0135	-0.006	-.0079
	0.140	0.736	.1827	-.0789	-.0152	-0.011	-.0079
	0.179	0.959	.3035	-.0981	-.0154	-0.007	-.0069
0.90	-0.60	-0.331	.0436	.0673	.0094	-0.007	-.0078
	-0.18	-0.098	.0143	.0257	.0027	-0.006	-.0093
	0.001	-0.013	.0117	.0102	-.0004	-0.005	-.0095
	0.021	0.084	.0135	-.0046	-.0044	-0.005	-.0098
	0.061	0.310	.0405	-.0440	-.0112	-0.005	-.0085
	0.100	0.587	.1096	-.1042	-.0156	-0.009	-.0070
	0.140	0.840	.2135	-.1599	-.0156	-0.014	-.0070
	0.178	1.069	.3460	-.2069	-.0157	-0.011	-.0044
1.00	-0.59	-0.339	.0529	.0943	.0086	-0.006	-.0073
	-0.18	-0.087	.0222	.0279	.0021	-0.005	-.0090
	0.001	0.010	.0192	.0014	-.0009	-0.004	-.0096
	0.021	0.114	.0221	-.0249	-.0046	-0.004	-.0096
	0.061	0.357	.0519	-.0863	-.0107	-0.005	-.0076
	0.101	0.599	.1181	-.1410	-.0140	-0.009	-.0058
	0.142	0.831	.2184	-.1862	-.0143	-0.012	-.0039
	0.179	1.021	.3342	-.2208	-.0139	-0.011	-.0012
1.10	-0.59	-0.347	.0536	.1022	.0097	-0.008	-.0063
	-0.18	-0.107	.0232	.0386	.0026	-0.006	-.0084
	0.001	-0.016	.0194	.0161	-.0012	-0.004	-.0090
	0.020	0.078	.0213	-.0088	-.0043	-0.004	-.0095
	0.062	0.311	.0484	-.0664	-.0105	-0.005	-.0077
	0.100	0.565	.1109	-.1348	-.0140	-0.009	-.0057
	0.141	0.764	.2008	-.1624	-.0133	-0.013	-.0052
	0.178	0.932	.3083	-.2038	-.0125	-0.010	-.0030
1.30	-0.59	-0.295	.0443	.0761	.0070	-0.009	-.0077
	-0.16	-0.083	.0185	.0251	.0022	-0.007	-.0089
	0.001	-0.005	.0162	.0055	-.0002	-0.007	-.0092
	0.020	0.077	.0184	-.0151	-.0034	-0.007	-.0092
	0.060	0.276	.0417	-.0614	-.0084	-0.009	-.0079
	0.100	0.484	.0961	-.1068	-.0101	-0.012	-.0067
	0.141	0.688	.1806	-.1564	-.0097	-0.016	-.0058
	0.178	0.845	.2766	-.1882	-.0077	-0.017	-.0051
1.70	-0.59	-0.237	.0394	.0518	.0057	-0.012	-.0090
	-0.18	-0.080	.0180	.0225	.0019	-0.010	-.0098
	0.001	-0.014	.0163	.0079	-.0004	-0.010	-.0101
	0.021	0.063	.0181	-.0076	-.0033	-0.010	-.0101
	0.060	0.220	.0364	-.0360	-.0070	-0.011	-.0093
	0.099	0.374	.0778	-.0635	-.0072	-0.015	-.0094
	0.140	0.521	.1411	-.0889	-.0066	-0.017	-.0092
	0.178	0.652	.2188	-.1043	-.0045	-0.022	-.0088
2.22	-0.59	-0.181	.0332	.0288	.0037	-0.014	-.0092
	-0.18	-0.052	.0163	.0102	.0010	-0.012	-.0098
	0.001	0.006	.0150	.0006	-.0006	-0.011	-.0100
	0.021	0.068	.0170	-.0086	-.0024	-0.012	-.0100
	0.060	0.189	.0333	-.0248	-.0046	-0.015	-.0096
	0.100	0.317	.0685	-.0401	-.0052	-0.019	-.0101
	0.140	0.436	.1208	-.0496	-.0057	-0.024	-.0099
	0.178	0.541	.1847	-.0521	-.0062	-0.030	-.0074

~~CONFIDENTIAL~~

TABLE III.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS

AT $\beta = 5^\circ$ - Continued(e) BWC; $\delta = 9.7^\circ$

M	α , deg	C_L	C_D	C_m	C_L	C_Y	C_n
0.7 0	-0.59	-0.308	.0391	.1090	.0056	-0.010	-.0091
	-0.17	-0.091	.0171	.0751	-.0001	-0.009	-.0101
	0.001	-0.013	.0161	.0662	-.0029	-0.008	-.0102
	0.019	0.062	.0190	.0604	-.0063	-0.005	-.0103
	0.060	0.275	.0454	.0424	-.0134	0.005	-.0106
	0.100	0.510	.1063	.0192	-.0180	0.001	-.0062
	0.141	0.747	.2000	-.0208	-.0200	0.007	-.0003
	0.178	0.957	.3140	-.0694	-.0174	0.017	.0090
0.9 0	-0.60	-0.332	.0442	.1312	.0066	-0.011	-.0092
	-0.31	-0.092	.0163	.0808	-.0000	-0.010	-.0102
	0.001	-0.002	.0164	.0683	-.0035	-0.009	-.0105
	0.020	0.080	.0199	.0580	-.0072	-0.007	-.0106
	0.060	0.318	.0512	.0255	-.0156	0.003	-.0105
	0.099	0.574	.1193	-.0225	-.0206	-0.001	-.0056
	0.141	0.840	.2270	-.1047	-.0206	0.006	.0027
	0.180	1.076	.3642	-.1919	-.0171	0.005	.0064
1.0 0	-0.60	-0.335	.0521	.1543	.0057	-0.013	-.0084
	-0.19	-0.088	.0241	.0846	-.0007	-0.011	-.0099
	0.001	0.007	.0270	.0619	-.0040	-0.008	-.0104
	0.020	0.099	.0279	.0401	-.0071	-0.006	-.0105
	0.060	0.350	.0610	-.0162	-.0150	0.004	-.0099
	0.100	0.600	.1298	-.0694	-.0188	-0.000	-.0048
	0.140	0.830	.2304	-.1193	-.0186	-0.002	-.0001
	0.179	1.020	.3513	-.1700	-.0162	0.001	.0047
1.1 0	-0.59	-0.387	.0508	.1603	.0067	-0.015	-.0073
	-0.18	-1.046	.0261	.0941	-.0003	-0.012	-.0092
	0.001	-0.074	.0244	.0687	-.0039	-0.009	-.0097
	0.020	0.831	.0281	.0471	-.0076	-0.006	-.0104
	0.060	3.106	.0583	-.0036	-.0150	0.001	-.0099
	0.101	5.726	.1261	-.0748	-.0174	-0.002	-.0051
	0.141	7.807	.2190	-.1102	-.0171	0.001	-.0021
	0.178	9.379	.3265	-.1554	-.0142	0.001	.0021
1.3 0	-0.59	-2.848	.0416	.1322	.0047	-0.012	-.0092
	-0.18	-0.900	.0211	.0813	-.0005	-0.011	-.0096
	0.001	-0.058	.0203	.0613	-.0032	-0.010	-.0098
	0.020	0.711	.0235	.0430	-.0060	-0.009	-.0099
	0.060	2.872	.0507	-.0094	-.0112	-0.006	-.0092
	0.100	4.968	.1084	-.0604	-.0135	-0.007	-.0043
	0.141	7.046	.1968	-.1109	-.0131	-0.004	-.0001
	0.177	8.650	.2949	-.1504	-.0095	-0.003	.0032
1.7 0	-0.60	-2.374	.0392	.1055	.0032	-0.014	-.0100
	-0.17	-0.722	.0209	.0708	-.0017	-0.013	-.0105
	0.002	-0.096	.0202	.0578	-.0042	-0.012	-.0108
	0.020	0.551	.0228	.0448	-.0074	-0.012	-.0109
	0.060	2.239	.0448	.0101	-.0100	-0.010	-.0104
	0.099	3.796	.0872	-.0203	-.0105	-0.008	-.0070
	0.141	5.293	.1539	-.0492	-.0089	-0.006	-.0050
	0.177	6.547	.2298	-.0765	-.0056	-0.011	-.0032
2.2 2	-0.60	-1.725	.0329	.0725	.0020	-0.016	-.0095
	-0.18	-0.432	.0190	.0528	-.0017	-0.013	-.0104
	0.001	0.082	.0187	.0443	-.0034	-0.013	-.0107
	0.020	0.646	.0215	.0358	-.0052	-0.013	-.0107
	0.060	2.012	.0410	.0126	-.0069	-0.013	-.0100
	0.100	3.239	.0771	-.0053	-.0072	-0.012	-.0087
	0.141	4.439	.1322	-.0215	-.0062	-0.018	-.0085
	0.178	5.415	.1950	-.0242	-.0077	-0.016	-.0056

TABLE III.- AERODYNAMIC CHARACTERISTICS OF WING-ON CONFIGURATIONS
 AT $\beta = 5^\circ$ - Concluded
 (f) BW

M	α , deg	C_L	C_D	C_m	C_L	C_Y	C_n
0.70	-0.60	-0.307	.0385	.1075	.0056	-0.011	-.0084
	-0.18	-0.089	.0120	.0348	.0017	-0.007	-.0089
	0.001	-0.015	.0108	.0101	-.0002	-0.007	-.0091
	0.020	0.068	.0118	-.0162	-.0026	-0.007	-.0093
	0.061	0.274	.0349	-.0838	-.0063	-0.009	-.0090
	0.099	0.492	.0888	-.1539	-.0094	-0.016	-.0080
	0.140	0.726	.1798	-.2281	-.0108	-0.021	-.0090
	0.178	0.902	.2842	-.2790	-.0058	-0.019	-.0131
0.90	-0.60	-0.318	.0409	.1235	.0062	-0.011	-.0083
	-0.18	-0.086	.0125	.0359	.0017	-0.007	-.0091
	0.001	-0.007	.0106	.0081	-.0005	-0.006	-.0095
	0.020	0.088	.0123	-.0253	-.0034	-0.007	-.0094
	0.061	0.317	.0405	-.1111	-.0077	-0.012	-.0087
	0.100	0.564	.1042	-.2079	-.0110	-0.019	-.0078
	0.140	0.814	.2072	-.3153	-.0112	-0.025	-.0083
	0.178	0.989	.3207	-.3750	-.0014	-0.024	-.0119
1.00	-0.60	-0.329	.0487	.1476	.0055	-0.013	-.0075
	-0.17	-0.076	.0185	.0350	.0011	-0.008	-.0091
	0.001	0.014	.0200	-.0035	-.0010	-0.006	-.0094
	0.020	0.118	.0198	-.0478	-.0036	-0.009	-.0089
	0.061	0.361	.0531	-.1550	-.0072	-0.013	-.0078
	0.101	0.602	.1194	-.2569	-.0098	-0.021	-.0068
	0.140	0.807	.2132	-.3416	-.0101	-0.026	-.0067
	0.179	0.994	.3292	-.4189	-.0108	-0.027	-.0083
1.10	-0.60	-0.324	.0477	.1506	.0065	-0.012	-.0069
	-0.16	-0.084	.0202	.0421	.0015	-0.008	-.0084
	0.001	-0.009	.0188	.0101	-.0006	-0.008	-.0086
	0.020	0.088	.0192	-.0303	-.0035	-0.007	-.0089
	0.061	0.315	.0482	-.1333	-.0058	-0.013	-.0076
	0.100	0.558	.1101	-.2377	-.0094	-0.020	-.0066
	0.142	0.742	.1992	-.3101	-.0086	-0.024	-.0075
	0.179	0.913	.3048	-.3852	-.0098	-0.028	-.0076
1.30	-0.60	-0.278	.0409	.1235	.0046	-0.012	-.0086
	-0.18	-0.079	.0168	.0364	.0013	-0.009	-.0088
	0.001	0.003	.0149	.0007	-.0004	-0.008	-.0092
	0.020	0.087	.0170	-.0351	-.0026	-0.009	-.0089
	0.060	0.281	.0413	-.1197	-.0054	-0.013	-.0086
	0.099	0.468	.0916	-.1984	-.0064	-0.020	-.0083
	0.141	0.650	.1703	-.2714	-.0068	-0.026	-.0091
	0.178	0.808	.2648	-.3321	-.0066	-0.028	-.0119
1.70	-0.60	-0.228	.0373	.0959	.0029	-0.015	-.0096
	-0.18	-0.072	.0168	.0310	.0008	-0.011	-.0098
	0.000	-0.006	.0149	.0040	-.0005	-0.011	-.0100
	0.020	0.066	.0171	-.0262	-.0020	-0.011	-.0098
	0.060	0.216	.0358	-.0882	-.0039	-0.015	-.0096
	0.099	0.360	.0750	-.1429	-.0044	-0.022	-.0102
	0.140	0.494	.1331	-.1861	-.0051	-0.029	-.0116
	0.177	0.617	.2051	-.2142	-.0057	-0.033	-.0151
2.22	-0.59	-0.164	.0298	.0614	.0017	-0.017	-.0097
	-0.18	-0.043	.0147	.0165	.0002	-0.012	-.0098
	0.001	0.012	.0137	-.0045	-.0005	-0.012	-.0099
	0.020	0.067	.0159	-.0259	-.0013	-0.013	-.0098
	0.060	0.186	.0324	-.0682	-.0027	-0.018	-.0100
	0.100	0.302	.0652	-.1019	-.0040	-0.026	-.0115
	0.140	0.413	.1147	-.1239	-.0050	-0.037	-.0133
	0.178	0.518	.1766	-.1439	-.0057	-0.041	-.0150

TABLE IV.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 0^\circ$
 (a) BV

M	α , deg	C_L	C_D	C_m	C_L	C_T	C_n
0.70	-0.63	-0.009	.0080	-.0189	-.0001	0.000	.0006
	-0.42	-0.006	.0074	-.0121	-.0000	0.000	.0004
	-0.23	-0.002	.0073	-.0072	-.0000	0.000	.0002
	-0.09	-0.002	.0068	-.0019	0.000	0.001	-.0001
	-0.03	0.002	.0071	-.0014	0.000	0.001	-.0001
	0.002	0.000	.0070	0.008	0.001	0.001	-.0002
	0.017	0.002	.0071	0.056	0.001	0.001	-.0002
	0.038	0.006	.0070	0.118	0.001	0.001	-.0004
	0.057	0.008	.0070	0.178	0.000	0.001	-.0006
	0.078	0.015	.0092	0.229	0.001	0.001	-.0006
	0.097	0.021	.0106	0.289	0.001	0.000	-.0004
	0.118	0.028	.0126	0.359	0.001	0.000	-.0007
	0.138	0.037	.0161	0.429	0.002	0.001	-.0008
	0.158	0.047	.0192	0.497	-.0000	0.001	-.0007
	0.178	0.058	.0238	0.574	-.0002	0.002	.0001
0.90	-0.60	-0.011	.0080	-.0174	-.0000	0.001	.0001
	-0.40	-0.004	.0070	-.0132	0.000	0.001	.0002
	-0.21	-0.001	.0069	-.0072	0.001	0.001	.0002
	-0.07	0.000	.0068	-.0027	0.000	0.001	-.0002
	0.001	0.001	.0069	-.0008	0.000	0.001	-.0001
	0.004	0.001	.0068	0.012	0.000	0.001	-.0003
	0.020	0.002	.0069	0.062	0.000	0.001	-.0004
	0.040	0.006	.0071	0.125	0.001	0.001	-.0005
	0.060	0.010	.0079	0.175	0.001	0.001	-.0005
	0.079	0.015	.0088	0.238	0.002	0.000	-.0004
	0.099	0.022	.0105	0.294	0.001	0.001	-.0007
	0.120	0.031	.0132	0.364	0.002	0.003	-.0009
	0.140	0.039	.0159	0.436	0.002	0.002	-.0009
	0.160	0.049	.0201	0.519	0.002	0.002	-.0009
	0.181	0.063	.0254	0.603	0.008	0.001	-.0001
0.95	-0.60	-0.004	.0076	-.0213	-.0000	0.000	.0004
	-0.38	-0.000	.0071	-.0142	0.000	0.000	-.0000
	-0.19	0.002	.0074	-.0083	0.000	0.001	-.0000
	-0.04	0.003	.0077	-.0030	0.000	0.001	-.0000
	0.002	0.003	.0086	-.0009	0.000	0.001	-.0002
	0.006	0.008	.0074	0.015	0.000	0.001	-.0002
	0.021	0.001	.0086	0.074	0.001	0.001	-.0002
	0.043	0.004	.0079	0.146	0.001	0.001	-.0004
	0.061	0.007	.0086	0.199	0.001	0.002	-.0007
	0.082	0.014	.0106	0.248	0.001	0.002	-.0007
	0.102	0.019	.0115	0.326	0.001	0.002	-.0009
	0.121	0.029	.0145	0.387	0.001	0.001	-.0008
	0.141	0.039	.0170	0.462	0.002	0.002	-.0011
	0.160	0.052	.0221	0.527	0.001	0.002	-.0009
	0.182	0.064	.0279	0.628	-.0000	0.001	-.0004
1.00	-0.57	-0.009	.0126	-.0193	0.001	0.000	.0000
	-0.38	-0.006	.0107	-.0131	0.000	0.000	-.0000
	-0.17	-0.004	.0096	-.0062	0.000	0.000	-.0002
	-0.03	0.001	.0132	-.0018	0.000	0.001	-.0002
	0.003	0.000	.0114	0.006	0.000	0.001	-.0004
	0.009	0.002	.0088	0.027	0.000	0.001	-.0004
	0.022	0.002	.0113	0.080	0.000	0.001	-.0005
	0.063	0.009	.0137	0.187	0.001	0.002	-.0007
	0.083	0.011	.0118	0.266	0.001	0.001	-.0006
	0.103	0.018	.0147	0.331	0.001	0.002	-.0008
	0.124	0.029	.0191	0.392	0.002	0.001	-.0008
	0.143	0.036	.0176	0.485	0.001	0.004	-.0012
	0.163	0.049	.0275	0.550	0.002	0.004	-.0012
	0.184	0.064	.0285	0.639	0.001	0.004	-.0012
1.05	-0.59	-0.014	.0138	-.0166	-.0000	-.0001	.0001
	-0.38	-0.007	.0120	-.0116	-.0000	0.000	-.0000
	-0.18	-0.004	.0117	-.0066	-.0000	0.000	-.0002
	-0.04	0.004	.0117	-.0003	0.000	0.000	-.0002
	0.007	0.001	.0117	0.012	0.000	0.001	-.0002
	0.001	0.001	.0121	0.001	0.000	0.000	-.0002
	0.022	0.001	.0114	0.064	-.0001	0.000	-.0002
	0.043	0.003	.0118	0.136	0.000	0.001	-.0004
	0.062	0.007	.0185	0.189	0.001	0.000	-.0004
	0.081	0.010	.0131	0.257	0.001	0.001	-.0006
	0.103	0.023	.0153	0.311	0.001	0.002	-.0006
	0.122	0.029	.0185	0.372	0.001	0.000	-.0005
	0.141	0.038	.0219	0.453	0.001	0.000	-.0005
	0.163	0.052	.0264	0.545	0.000	0.001	-.0008
	0.182	0.064	.0314	0.640	0.001	0.001	-.0009
1.10	-0.60	-0.012	.0133	-.0154	0.001	0.001	-.0005
	-0.39	-0.010	.0126	-.0106	0.002	0.001	-.0007
	-0.19	-0.007	.0119	-.0042	0.001	0.001	-.0009
	-0.05	-0.005	.0122	-.0002	0.001	0.001	-.0008
	0.001	0.004	.0123	0.015	0.001	0.001	-.0008
	0.026	0.004	.0116	0.034	0.001	0.005	-.0010
	0.041	0.006	.0119	0.085	0.001	0.005	-.0013
	0.062	0.000	.0120	0.133	0.001	0.005	-.0013
	0.081	0.006	.0128	0.196	0.001	0.005	-.0010
	0.100	0.013	.0139	0.238	0.001	0.005	-.0012
	0.121	0.019	.0156	0.302	0.001	0.004	-.0011
	0.142	0.027	.0178	0.388	0.000	0.004	-.0009
	0.162	0.038	.0215	0.451	0.001	0.004	-.0012
	0.182	0.050	.0262	0.531	0.001	0.004	-.0011
	0.182	0.062	.0321	0.631	0.002	0.004	-.0015

TABLE IV.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 0^\circ$ - Continued
 (a) BV - Concluded

M	α , deg	C_L	C_D	C_m	C_L	C_T	C_n
1.30	-0.60	-0.012	.0106	-.0179	.0003	0.003	-.0009
	-0.40	-0.006	.0095	-.0127	.0003	0.003	-.0010
	-0.19	-0.003	.0092	-.0065	.0003	0.004	-.0011
	-0.06	-0.001	.0090	-.0023	.0003	0.003	-.0011
	0.0000	-0.0000	.0091	-.0005	.0003	0.004	-.0012
	0.0005	0.0000	.0090	.0010	.0003	0.002	-.0007
	0.019	0.004	.0090	.0051	.0002	0.002	-.0008
	0.041	0.007	.0092	.0120	.0002	0.002	-.0007
	0.061	0.012	.0101	.0172	.0002	0.002	-.0007
	0.079	0.016	.0112	.0228	.0002	0.002	-.0008
	0.100	0.025	.0133	.0297	.0002	0.002	-.0011
	0.120	0.034	.0159	.0374	.0002	0.002	-.0010
	0.140	0.044	.0195	.0458	.0002	0.002	-.0010
	0.161	0.057	.0246	.0550	.0003	0.002	-.0013
	0.181	0.070	.0311	.0663	.0003	0.003	-.0012
1.50	-0.61	-0.011	.0110	-.0191	.0002	0.002	-.0006
	-0.40	-0.006	.0099	-.0125	.0002	0.003	-.0008
	-0.20	-0.003	.0094	-.0065	.0002	0.003	-.0009
	-0.06	-0.000	.0092	-.0026	.0002	0.003	-.0010
	-0.000	0.0000	.0094	-.0003	.0002	0.003	-.0011
	0.0005	0.0002	.0092	.0004	.0002	0.003	-.0011
	0.019	0.003	.0092	.0052	.0002	0.003	-.0012
	0.039	0.008	.0095	.0114	.0003	0.003	-.0012
	0.059	0.013	.0101	.0176	.0003	0.003	-.0015
	0.079	0.019	.0118	.0236	.0003	0.004	-.0018
	0.099	0.027	.0140	.0305	.0003	0.003	-.0018
	0.119	0.036	.0168	.0383	.0003	0.003	-.0019
	0.139	0.048	.0208	.0473	.0004	0.003	-.0020
	0.160	0.063	.0269	.0575	.0003	0.003	-.0019
	0.180	0.083	.0357	.0704	.0005	0.002	-.0020
1.70	-0.61	-0.014	.0115	-.0185	.0001	0.002	-.0004
	-0.40	-0.008	.0100	-.0124	.0001	0.002	-.0005
	-0.21	-0.005	.0095	-.0065	.0001	0.002	-.0006
	-0.07	-0.002	.0096	-.0019	.0001	0.002	-.0007
	-0.01	-0.001	.0095	.0000	.0001	0.002	-.0006
	0.003	-0.001	.0095	.0014	.0001	0.002	-.0006
	0.019	0.001	.0094	.0072	.0001	0.002	-.0006
	0.039	0.005	.0096	.0133	.0001	0.002	-.0007
	0.059	0.010	.0107	.0195	.0002	0.002	-.0009
	0.079	0.017	.0121	.0257	.0001	0.002	-.0011
	0.099	0.026	.0138	.0337	.0002	0.002	-.0011
	0.119	0.037	.0171	.0420	.0002	0.002	-.0013
	0.139	0.051	.0220	.0519	.0002	0.003	-.0014
	0.160	0.070	.0296	.0639	.0002	0.002	-.0013
	0.179	0.092	.0395	.0779	.0003	0.002	-.0015
1.90	-0.60	-0.015	.0107	-.0169	.0000	0.001	-.0003
	-0.40	-0.010	.0096	-.0101	.0000	0.001	-.0004
	-0.21	-0.006	.0091	-.0050	.0000	0.002	-.0005
	-0.05	-0.003	.0088	.0003	.0000	0.002	-.0006
	0.001	-0.002	.0088	.0015	.0000	0.001	-.0005
	0.005	-0.002	.0086	.0037	.0000	0.002	-.0006
	0.019	0.001	.0086	.0083	.0000	0.001	-.0006
	0.039	0.004	.0090	.0146	.0000	0.001	-.0006
	0.060	0.009	.0093	.0210	.0001	0.001	-.0008
	0.081	0.017	.0115	.0277	.0001	0.001	-.0008
	0.101	0.028	.0140	.0354	.0001	0.001	-.0010
	0.121	0.039	.0173	.0453	.0001	0.001	-.0010
	0.140	0.057	.0233	.0558	.0002	0.001	-.0011
	0.161	0.078	.0320	.0688	.0003	0.001	-.0014
	0.181	0.102	.0428	.0825	.0003	0.002	-.0018
2.22	-0.58	-0.017	.0105	-.0168	-.0001	0.001	-.0002
	-0.37	-0.011	.0093	-.0107	-.0000	0.001	-.0002
	-0.16	-0.005	.0086	-.0042	-.0001	0.001	-.0004
	-0.02	-0.003	.0084	.0006	-.0000	0.002	-.0005
	0.008	-0.001	.0083	.0036	.0000	0.002	-.0006
	0.023	0.001	.0084	.0090	.0000	0.002	-.0007
	0.043	0.005	.0087	.0157	.0000	0.002	-.0008
	0.064	0.012	.0102	.0221	.0000	0.001	-.0008
	0.084	0.021	.0117	.0300	.0000	0.001	-.0009
	0.104	0.033	.0148	.0393	.0001	0.001	-.0009
	0.123	0.050	.0196	.0485	.0001	0.001	-.0010
	0.143	0.070	.0266	.0605	.0002	0.000	-.0012
	0.164	0.093	.0361	.0719	.0002	0.000	-.0014
	0.184	0.117	.0484	.0830	.0002	0.001	-.0015

TABLE IV.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS

AT $\beta = 0^\circ$ - Continued(b) BVC; $\delta = 0.2^\circ$

M	C_{D0} deg	C_L	C_D	C_M	C_{L1}	C_{Y1}	C_{D1}
0.70	-0.63	-0.041	.0120	-.0725	-.0000	-0.001	.0010
	-0.43	-0.027	.0097	-.0477	-.0000	-0.000	.0007
	-0.23	-0.014	.0080	-.0239	-.0000	0.001	.0003
	-0.08	-0.004	.0074	-.0095	-.0000	0.001	.0002
	-0.03	0.000	.0074	-.0037	-.0000	0.001	.0000
	0.002	0.003	.0075	.0002	-.0000	0.001	.0000
	0.017	0.008	.0076	.0175	-.0000	0.001	-.0002
	0.037	0.021	.0087	.0410	-.0000	0.001	-.0002
	0.057	0.035	.0109	.0650	-.0001	0.000	-.0003
	0.077	0.052	.0141	.0915	-.0001	0.000	-.0005
	0.097	0.068	.0174	.1192	-.0001	0.001	-.0009
	0.117	0.087	.0217	.1482	-.0002	0.001	-.0015
	0.137	0.104	.0319	.1785	-.0004	0.004	-.0020
	0.158	0.125	.0417	.2033	-.0006	0.003	-.0017
	0.177	0.145	.0520	.2305	-.0010	0.005	-.0028
0.90	-0.61	-0.040	.0118	-.0756	-.0000	-0.001	.0008
	-0.41	-0.028	.0097	-.0490	-.0000	-0.000	.0006
	-0.21	-0.013	.0080	-.0241	-.0000	0.001	.0002
	-0.06	-0.003	.0076	-.0082	-.0000	0.001	-.0001
	-0.00	0.001	.0075	-.0024	-.0000	0.001	-.0001
	0.004	0.001	.0074	.0037	-.0000	0.001	-.0002
	0.019	0.010	.0077	.0198	-.0000	0.000	-.0002
	0.039	0.024	.0086	.0434	-.0000	0.000	-.0004
	0.059	0.040	.0113	.0706	-.0001	0.002	-.0006
	0.079	0.056	.0149	.0986	-.0001	0.002	-.0008
	0.100	0.073	.0201	.1276	-.0002	0.002	-.0011
	0.119	0.093	.0264	.1575	-.0003	0.003	-.0018
	0.140	0.112	.0349	.1834	-.0005	0.003	-.0023
	0.160	0.132	.0443	.2091	-.0006	0.004	-.0025
	0.180	0.147	.0541	.2371	-.0009	0.004	-.0032
0.95	-0.59	-0.043	.0125	-.0730	-.0000	-0.001	.0006
	-0.38	-0.027	.0105	-.0462	-.0000	-0.000	.0005
	-0.19	-0.013	.0093	-.0242	-.0001	0.000	.0002
	-0.04	-0.003	.0086	-.0080	-.0000	0.001	-.0000
	0.002	-0.000	.0083	-.0007	-.0000	0.001	-.0003
	0.007	0.004	.0085	.0024	-.0000	0.001	-.0002
	0.021	0.012	.0091	.0203	-.0001	0.001	-.0004
	0.042	0.027	.0103	.0458	-.0001	-0.000	-.0003
	0.061	0.039	.0126	.0711	-.0001	0.000	-.0005
	0.081	0.058	.0161	.0976	-.0000	-0.001	-.0006
	0.101	0.076	.0214	.1271	-.0001	-0.001	-.0010
	0.123	0.093	.0280	.1551	-.0003	0.003	-.0013
	0.142	0.110	.0360	.1834	-.0005	0.004	-.0023
	0.162	0.131	.0459	.2111	-.0005	0.004	-.0023
	0.182	0.152	.0576	.2388	-.0008	0.005	-.0029
1.00	-0.57	-0.048	.0157	-.0709	-.0000	-0.001	.0006
	-0.37	-0.031	.0118	-.0467	-.0001	-0.000	.0003
	-0.17	-0.016	.0130	-.0214	-.0000	0.000	.0000
	-0.02	-0.006	.0103	-.0054	-.0000	0.001	-.0000
	0.003	-0.001	.0103	-.0005	-.0000	0.001	-.0003
	0.007	-0.000	.0106	.0040	-.0000	-0.000	-.0002
	0.022	0.006	.0106	.0224	-.0000	-0.000	-.0003
	0.043	0.024	.0147	.0471	-.0000	-0.001	-.0003
	0.063	0.038	.0193	.0719	-.0001	-0.001	-.0004
	0.083	0.053	.0272	.0984	-.0000	-0.001	-.0006
	0.103	0.069	.0339	.1253	-.0001	0.003	-.0012
	0.122	0.087	.0359	.1507	-.0002	0.002	-.0017
	0.143	0.107	.0392	.1777	-.0005	0.003	-.0019
	0.163	0.123	.0450	.2049	-.0005	0.004	-.0022
	0.183	0.145	.0591	.2396	-.0007	0.003	-.0023
1.05	-0.59	-0.048	.0185	-.0733	-.0000	-0.001	.0008
	-0.38	-0.031	.0153	-.0463	-.0000	0.000	.0004
	-0.18	-0.017	.0133	-.0224	-.0001	-0.000	.0004
	-0.03	-0.007	.0126	-.0064	-.0000	-0.000	.0002
	0.002	-0.004	.0125	-.0009	-.0000	0.001	-.0001
	0.007	-0.002	.0117	.0052	-.0000	0.001	-.0000
	0.022	0.005	.0132	.0203	-.0000	0.001	-.0002
	0.042	0.020	.0135	.0448	-.0000	0.000	-.0003
	0.062	0.034	.0162	.0684	-.0000	-0.001	-.0003
	0.082	0.052	.0199	.0931	-.0000	-0.001	-.0004
	0.102	0.066	.0254	.1194	-.0001	0.003	-.0009
	0.122	0.082	.0330	.1478	-.0002	0.001	-.0013
	0.142	0.101	.0370	.1719	-.0004	0.002	-.0016
	0.163	0.119	.0475	.1986	-.0004	0.002	-.0018
	0.183	0.142	.0593	.2269	-.0007	0.002	-.0021
1.10	-0.59	-0.046	.0179	-.0674	-.0001	-0.000	.0001
	-0.39	-0.031	.0154	-.0439	-.0002	0.001	-.0001
	-0.18	-0.018	.0133	-.0203	-.0001	0.002	-.0004
	-0.04	-0.008	.0134	-.0042	-.0001	0.002	-.0006
	0.002	-0.005	.0125	.0011	-.0001	0.002	-.0007
	0.006	-0.003	.0127	.0064	-.0001	0.002	-.0006
	0.021	0.005	.0128	.0210	-.0001	0.000	-.0005
	0.041	0.019	.0136	.0444	-.0001	0.000	-.0007
	0.061	0.032	.0156	.0685	-.0001	0.002	-.0006
	0.081	0.050	.0196	.0946	-.0000	0.002	-.0008
	0.101	0.064	.0245	.1212	-.0000	0.002	-.0011
	0.121	0.081	.0305	.1420	-.0002	0.003	-.0016
	0.142	0.095	.0384	.1684	-.0004	0.003	-.0020
	0.162	0.116	.0489	.1944	-.0004	0.003	-.0021
	0.182	0.134	.0589	.2176	-.0006	0.003	-.0023

TABLE IV.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS

AT $\beta = 0^\circ$ - Continued
 (b) BVC; $\delta = 0.2^\circ$ - Concluded

M	α , deg	C_L	C_D	C_m	C_i	C_Y	C_n
1.30	-0.60	-0.039	.0144	-.0693	.0002	-0.000	.0001
	-0.40	-0.027	.0121	-.0455	.0002	0.001	-.0002
	-0.20	-0.013	.0107	-.0240	.0002	0.002	-.0005
	-0.05	-0.004	.0098	-.0088	.0002	0.002	-.0006
	0.001	-0.001	.0098	-.0032	.0002	0.002	-.0007
	0.005	0.002	.0098	.0004	.0002	0.002	-.0007
	0.020	0.009	.0102	.0156	.0002	0.001	-.0006
	0.040	0.023	.0112	.0387	.0002	0.002	-.0007
	0.060	0.036	.0134	.0615	.0002	0.002	-.0005
	0.080	0.051	.0165	.0854	.0002	0.001	-.0006
	0.100	0.065	.0212	.1092	.0002	0.001	-.0006
	0.120	0.080	.0268	.1321	.0002	0.001	-.0011
	0.140	0.096	.0343	.1538	.0002	0.001	-.0012
	0.161	0.114	.0425	.1768	.0004	0.003	-.0012
	0.181	0.132	.0530	.2010	.0006	0.002	-.0014
1.50	-0.61	-0.037	.0150	-.0674	.0002	-0.000	.0001
	-0.41	-0.025	.0125	-.0447	.0002	0.000	-.0002
	-0.21	-0.013	.0110	-.0232	.0002	0.001	-.0005
	-0.06	-0.004	.0104	-.0090	.0002	0.001	-.0007
	-0.00	-0.001	.0102	-.0030	.0002	0.002	-.0008
	0.004	0.000	.0101	.0018	.0002	0.003	-.0009
	0.019	0.007	.0103	.0161	.0002	0.003	-.0010
	0.039	0.021	.0111	.0371	.0002	0.002	-.0010
	0.059	0.034	.0134	.0595	.0002	0.002	-.0012
	0.079	0.047	.0163	.0816	.0003	0.002	-.0014
	0.093	0.062	.0212	.1029	.0003	0.002	-.0016
	0.119	0.078	.0272	.1246	.0004	0.002	-.0020
	0.139	0.095	.0346	.1451	.0003	0.002	-.0020
	0.160	0.114	.0442	.1663	.0006	0.003	-.0021
	0.180	0.132	.0546	.1886	.0007	0.002	-.0023
1.70	-0.62	-0.035	.0149	-.0612	.0001	-0.001	.0002
	-0.41	-0.026	.0127	-.0395	.0001	-0.000	.0000
	-0.20	-0.012	.0110	-.0187	.0001	0.001	-.0003
	-0.07	-0.005	.0105	-.0062	.0001	0.001	-.0003
	-0.01	-0.002	.0103	-.0011	.0001	0.001	-.0003
	0.004	-0.002	.0102	.0040	.0001	0.000	-.0003
	0.018	0.006	.0104	.0176	.0001	0.001	-.0005
	0.039	0.018	.0114	.0387	.0001	0.001	-.0006
	0.059	0.030	.0133	.0594	.0001	0.001	-.0006
	0.079	0.043	.0163	.0800	.0001	0.001	-.0006
	0.099	0.059	.0209	.1002	.0002	0.001	-.0010
	0.119	0.075	.0269	.1200	.0003	0.001	-.0014
	0.139	0.092	.0342	.1388	.0001	0.001	-.0014
	0.160	0.113	.0443	.1596	.0004	0.002	-.0015
	0.179	0.137	.0566	.1817	.0004	0.003	-.0015
1.90	-0.59	-0.036	.0141	-.0536	.0000	-0.001	.0002
	-0.40	-0.025	.0114	-.0346	.0000	-0.000	.0000
	-0.19	-0.014	.0103	-.0157	.0000	0.000	-.0002
	-0.05	-0.005	.0095	-.0027	.0000	0.000	-.0003
	-0.00	-0.003	.0096	.0021	.0000	-0.000	-.0003
	0.005	-0.001	.0092	.0070	.0000	0.002	-.0005
	0.020	0.007	.0098	.0204	.0000	0.001	-.0004
	0.040	0.018	.0105	.0398	.0000	0.001	-.0004
	0.061	0.030	.0126	.0591	.0000	0.000	-.0005
	0.080	0.043	.0158	.0774	.0000	0.000	-.0006
	0.100	0.057	.0201	.0963	.0001	0.001	-.0009
	0.120	0.073	.0261	.1148	.0002	0.001	-.0012
	0.140	0.092	.0339	.1330	.0001	0.000	-.0011
	0.161	0.116	.0449	.1535	.0001	0.001	-.0011
	0.181	0.146	.0595	.1755	.0005	0.001	-.0018
2.22	-0.57	-0.036	.0137	-.0517	-.0000	-0.001	.0004
	-0.36	-0.024	.0114	-.0327	-.0001	-0.000	.0002
	-0.29	-0.013	.0081	-.0140	-.0001	-0.000	-.0000
	-0.02	-0.004	.0092	-.0017	-.0001	-0.000	-.0002
	0.004	-0.003	.0090	.0052	-.0001	-0.001	-.0000
	0.008	-0.001	.0090	.0083	-.0001	-0.000	-.0002
	0.023	0.006	.0094	.0214	-.0001	0.002	-.0005
	0.043	0.018	.0103	.0394	-.0001	0.001	-.0005
	0.063	0.029	.0127	.0577	-.0000	0.000	-.0005
	0.083	0.043	.0160	.0754	.0000	0.001	-.0006
	0.103	0.059	.0205	.0936	.0001	0.000	-.0008
	0.123	0.076	.0270	.1112	.0001	-0.000	-.0010
	0.144	0.101	.0367	.1300	-.0000	0.000	-.0008
	0.164	0.129	.0493	.1500	-.0002	0.001	-.0008
	0.184	0.158	.0640	.1706	-.0003	0.001	-.0005

TABLE IV.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS

AT $\beta = 0^\circ$ - Continued(c) BVC; $\delta = 4.5^\circ$

M	α , deg	C_L	C_D	C_m	C_l	C_y	C_n
0.70	-0.63	-0.024	.0102	-.0396	-.0001	-0.002	.0008
	-.023	0.001	.0081	-.0005	.0000	0.000	.0003
	-0.02	0.013	.0086	.0221	.0000	-0.000	.0001
	0.016	0.026	.0098	.0432	.0001	-0.000	.0001
	0.057	0.057	.0162	.0959	.0001	0.002	-.0003
	0.097	0.089	.0268	.1510	.0001	0.002	-.0010
	0.137	0.128	.0442	.2095	.0007	0.005	-.0017
	0.177	0.165	.0663	.2606	.0013	0.006	-.0013
0.90	-0.61	-0.024	.0100	-.0412	.0000	-0.001	.0006
	-.020	0.002	.0078	.0022	.0000	0.001	.0001
	0.000	0.015	.0085	.0251	.0000	0.000	-.0001
	0.020	0.029	.0102	.0492	.0000	0.000	-.0003
	0.060	0.061	.0168	.1031	.0001	0.001	-.0005
	0.100	0.095	.0286	.1582	.0002	0.001	-.0010
	0.139	0.132	.0463	.2139	.0007	0.004	-.0017
	0.180	0.164	.0673	.2692	.0008	0.004	-.0015
1.00	-0.58	-0.024	.0142	-.0405	.0001	0.001	-.0003
	-.017	0.000	.0099	.0039	.0001	0.003	-.0008
	0.003	0.014	.0137	.0274	.0001	0.002	-.0007
	0.023	0.027	.0110	.0506	.0001	0.002	-.0008
	0.063	0.062	.0191	.1024	.0002	0.002	-.0011
	0.103	0.095	.0308	.1571	.0002	0.003	-.0014
	0.142	0.130	.0465	.2084	.0006	0.004	-.0021
	0.183	0.169	.0712	.2567	.0008	0.004	-.0022
1.10	-0.59	-0.027	.0157	-.0366	.0002	0.002	-.0009
	-.018	-0.001	.0131	.0039	.0001	0.003	-.0011
	0.002	0.012	.0138	.0273	.0002	0.002	-.0010
	0.021	0.024	.0152	.0501	.0002	0.001	-.0009
	0.062	0.055	.0225	.0990	.0002	0.002	-.0012
	0.101	0.087	.0336	.1468	.0002	0.002	-.0013
	0.142	0.120	.0474	.1961	.0006	0.003	-.0020
	0.182	0.152	.0698	.2444	.0007	0.003	-.0020
1.30	-0.61	-0.024	.0127	-.0399	.0002	0.001	-.0004
	-.019	-0.000	.0106	.0003	.0002	0.002	-.0007
	0.001	0.013	.0110	.0212	.0002	0.002	-.0007
	0.019	0.026	.0121	.0415	.0002	0.001	-.0006
	0.060	0.055	.0176	.0886	.0001	0.000	-.0004
	0.100	0.083	.0283	.1342	.0002	-0.000	-.0008
	0.140	0.116	.0438	.1779	.0006	0.001	-.0013
	0.181	0.146	.0634	.2219	.0016	-0.002	-.0033
1.70	-0.61	-0.025	.0133	-.0345	.0001	0.000	-.0001
	-.021	-0.000	.0110	.0024	.0001	0.001	-.0005
	-0.01	0.010	.0114	.0220	.0000	0.001	-.0004
	0.018	0.020	.0123	.0406	.0001	0.000	-.0003
	0.059	0.045	.0176	.0817	.0001	-0.001	-.0006
	0.099	0.070	.0264	.1200	.0002	-0.000	-.0012
	0.139	0.101	.0407	.1571	.0004	0.001	-.0013
	0.179	0.141	.0631	.1952	.0007	0.001	-.0021
2.22	-0.58	-0.026	.0123	-.0305	-.0001	-0.001	.0002
	-.017	-0.000	.0098	.0050	-.0001	-0.000	-.0002
	0.004	0.010	.0102	.0247	-.0001	-0.000	-.0001
	0.023	0.020	.0114	.0412	-.0000	-0.000	-.0003
	0.064	0.043	.0163	.0765	.0001	-0.000	-.0006
	0.103	0.069	.0257	.1092	.0001	-0.000	-.0007
	0.143	0.110	.0423	.1430	.0001	0.001	-.0006
	0.184	0.162	.0700	.1856	-.0001	0.002	-.0007

TABLE IV.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS

AT $\beta = 0^\circ$ - Continued(d) BVC; $\delta = 9.8^\circ$

M	α , deg	C_L	C_D	C_m	C_L	C_Y	C_n
0.70	-0.63	-0.008	.0091	-.0134	-.0001	0.000	.0007
	-0.22	0.015	.0104	.0300	.0000	0.001	.0003
	-0.03	0.028	.0123	.0520	.0001	0.001	.0002
	0.016	0.041	.0151	.0769	.0001	0.000	.0001
	0.057	0.074	.0245	.1290	.0001	-0.000	.0005
	0.097	0.110	.0392	.1873	.0002	0.001	-.0000
	0.137	0.141	.0578	.2429	.0006	0.004	-.0019
	0.178	0.158	.0736	.2646	.0011	0.006	-.0023
0.90	-0.62	-0.004	.0091	-.0132	-.0000	0.000	.0005
	-0.41	0.005	.0090	.0089	.0000	0.001	.0003
	-0.20	0.018	.0109	.0328	.0000	0.001	.0001
	-0.00	0.030	.0124	.0569	.0001	0.001	.0002
	0.019	0.043	.0156	.0820	.0001	0.000	.0001
	0.059	0.077	.0252	.1342	.0001	-0.000	.0003
	0.100	0.106	.0388	.1926	.0001	0.001	-.0005
	0.139	0.127	.0526	.2251	.0009	0.005	-.0023
	0.180	0.146	.0677	.2503	.0016	0.008	-.0037
1.00	-0.58	-0.006	.0119	-.0120	-.0000	0.001	-.0002
	-0.18	0.018	.0134	.0326	.0001	0.003	-.0006
	0.003	0.031	.0162	.0565	.0001	0.002	-.0004
	0.022	0.045	.0193	.0801	.0001	0.001	-.0004
	0.062	0.075	.0302	.1320	.0001	-0.000	-.0003
	0.102	0.110	.0434	.1873	.0001	-0.000	-.0002
	0.143	0.137	.0611	.2374	.0005	0.003	-.0015
	0.183	0.170	.0840	.2823	.0011	0.004	-.0026
1.10	-0.59	-0.009	.0141	-.0091	.0001	0.001	-.0008
	-0.18	0.014	.0142	.0331	.0001	0.002	-.0006
	0.001	0.027	.0178	.0551	.0001	0.001	-.0005
	0.021	0.040	.0213	.0792	.0001	0.001	-.0007
	0.061	0.067	.0301	.1274	.0000	0.001	-.0003
	0.101	0.096	.0442	.1781	.0002	0.001	-.0005
	0.142	0.123	.0613	.2198	.0004	0.003	-.0013
	0.182	0.155	.0841	.2638	.0009	0.004	-.0027
1.30	-0.60	-0.010	.0121	-.0128	.0002	0.002	-.0007
	-0.20	0.015	.0127	.0278	.0002	0.001	-.0006
	0.001	0.027	.0143	.0491	.0002	0.001	-.0005
	0.020	0.040	.0171	.0691	.0001	0.001	-.0002
	0.060	0.068	.0255	.1128	.0001	-0.000	.0002
	0.100	0.095	.0377	.1590	.0001	-0.000	-.0003
	0.140	0.116	.0518	.1996	.0004	0.001	-.0015
	0.181	0.142	.0710	.2409	.0012	0.002	-.0027
1.70	-0.61	-0.011	.0128	-.0101	.0000	0.001	-.0003
	-0.20	0.012	.0130	.0277	.0001	0.001	-.0003
	-0.01	0.021	.0145	.0456	.0000	-0.000	-.0001
	0.018	0.031	.0167	.0627	.0000	-0.000	-.0001
	0.059	0.054	.0235	.0999	.0000	-0.000	-.0003
	0.099	0.079	.0345	.1389	.0001	-0.000	-.0007
	0.139	0.107	.0494	.1722	.0005	0.001	-.0020
	0.179	0.136	.0691	.2116	.0003	0.005	-.0018
2.22	-0.57	-0.013	.0118	-.0066	-.0001	0.000	.0000
	-0.16	0.010	.0119	.0280	-.0001	-0.000	-.0000
	0.004	0.020	.0132	.0450	-.0001	-0.000	-.0000
	0.023	0.029	.0153	.0602	-.0001	-0.000	-.0002
	0.063	0.050	.0217	.0929	-.0000	-0.000	-.0003
	0.103	0.073	.0316	.1246	.0000	-0.000	-.0004
	0.143	0.108	.0481	.1565	.0002	-0.000	-.0012
	0.184	0.153	.0739	.1990	.0002	0.002	-.0019

TABLE IV.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 0^\circ$ - Concludedⁱ
 (e) BVC; $\delta = 19.8^\circ$

M	α , deg	C_L	C_D	C_m	C_L	C_Y	C_n
0.7 0	-0.63	0.024	.0162	.0394	-.0001	0.000	.0008
	-0.23	0.048	.0221	.0823	-.0000	0.001	.0005
	-0.02	0.060	.0279	.1070	.0000	0.000	.0004
	0.016	0.071	.0322	.1272	.0001	0.000	.0001
	0.057	0.103	.0469	.1758	-.0001	0.001	.0011
	0.097	0.124	.0610	.2117	.0001	0.001	-.0005
	0.138	0.132	.0698	.2252	.0009	0.010	-.0003
	0.179	0.143	.0826	.2361	.0012	0.008	-.0019
0.9 0	-0.62	0.023	.0167	.0408	-.0001	0.000	.0006
	-0.20	0.052	.0236	.0865	.0000	0.001	.0004
	0.000	0.062	.0283	.1101	.0001	0.001	.0002
	0.019	0.074	.0334	.1318	.0001	-.0000	-.0001
	0.060	0.103	.0476	.1770	-.0003	-.0000	.0017
	0.099	0.114	.0563	.1944	.0001	0.001	-.0002
	0.140	0.128	.0681	.2232	.0004	0.004	-.0012
	0.180	0.145	.0836	.2462	.0010	0.007	-.0020
1.0 0	-0.57	0.025	.0199	.0422	.0001	0.000	.0002
	-0.17	0.052	.0286	.0859	.0001	-.0000	.0001
	0.003	0.060	.0289	.1087	.0001	0.000	-.0003
	0.023	0.070	.0376	.1316	.0002	-.0001	-.0009
	0.064	0.101	.0503	.1745	.0001	0.001	.0002
	0.103	0.123	.0650	.2168	.0002	-.0000	-.0002
	0.142	0.143	.0800	.2460	.0004	0.002	-.0017
	0.183	0.164	.0993	.2764	.0007	0.003	-.0011
1.1 0	-0.60	0.021	.0212	.0414	.0001	0.003	-.0005
	-0.18	0.044	.0285	.0840	.0002	0.002	-.0007
	0.002	0.054	.0333	.1047	.0002	0.002	-.0007
	0.021	0.065	.0384	.1257	.0003	0.001	-.0013
	0.062	0.091	.0510	.1638	.0001	0.002	-.0004
	0.101	0.109	.0647	.2000	.0000	-.0000	-.0000
	0.142	0.130	.0801	.2331	.0003	0.001	-.0009
	0.182	0.149	.0997	.2535	.0013	0.004	-.0026
1.3 0	-0.59	0.021	.0179	.0356	.0002	0.002	-.0003
	-0.19	0.044	.0233	.0724	.0001	0.001	.0001
	0.001	0.054	.0269	.0914	.0002	0.001	-.0003
	0.020	0.063	.0318	.1101	.0002	0.001	-.0004
	0.061	0.089	.0435	.1473	.0001	-.0000	-.0000
	0.100	0.108	.0564	.1825	.0002	-.0000	-.0003
	0.141	0.123	.0718	.2157	.0006	0.001	-.0023
	0.179	0.144	.0891	.2417	.0016	0.005	-.0034
1.7 0	-0.61	0.011	.0184	.0296	.0000	0.000	-.0001
	-0.21	0.033	.0221	.0615	.0000	-.0000	-.0001
	-0.01	0.042	.0255	.0792	.0000	-.0001	-.0003
	0.018	0.050	.0288	.0949	.0000	0.000	-.0000
	0.058	0.072	.0382	.1258	.0000	-.0001	-.0003
	0.098	0.085	.0495	.1578	.0002	0.000	-.0016
	0.139	0.105	.0648	.1890	.0005	0.002	-.0017
	0.179	0.140	.0878	.2271	.0009	0.002	-.0027
2.2 2	-0.58	0.007	.0168	.0254	-.0001	-.0000	.0001
	-0.17	0.028	.0203	.0576	-.0001	-.0001	-.0000
	0.004	0.036	.0232	.0735	-.0000	-.0001	-.0000
	0.023	0.044	.0263	.0868	-.0000	-.0001	-.0002
	0.064	0.064	.0351	.1143	-.0000	-.0001	-.0003
	0.103	0.083	.0462	.1418	.0000	-.0000	-.0003
	0.144	0.116	.0647	.1748	.0001	0.002	-.0010
	0.184	0.157	.0919	.2152	.0005	0.001	-.0019

TABLE V.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 5^\circ$
 (a) BV

M	α , deg	C_L	C_D	C_m	C_l	C_y	C_n
0.70	-05.9	-0.012	.0119	-.0167	-.0093	-.0060	.0227
	-01.9	-0.003	.0097	-.0054	-.0085	-.0055	.0210
	000.1	-0.000	.0101	.0004	-.0081	-.0054	.0199
	002.1	0.003	.0097	.0067	-.0076	-.0052	.0185
	006.1	0.011	.0108	.0188	-.0069	-.0050	.0165
	010.1	0.022	.0128	.0313	-.0064	-.0045	.0136
	014.0	0.039	.0174	.0430	-.0062	-.0041	.0099
	018.0	0.061	.0260	.0574	-.0061	-.0033	.0058
0.90	-05.9	-0.012	.0119	-.0164	-.0098	-.0061	.0244
	-02.0	-0.005	.0106	-.0051	-.0091	-.0058	.0229
	000.2	-0.000	.0102	.0010	-.0086	-.0055	.0211
	002.0	0.003	.0102	.0070	-.0081	-.0054	.0201
	006.2	0.011	.0107	.0198	-.0072	-.0051	.0175
	010.0	0.023	.0128	.0318	-.0067	-.0046	.0143
	014.0	0.041	.0177	.0446	-.0063	-.0041	.0097
	017.9	0.065	.0269	.0603	-.0062	-.0034	.0049
1.00	-06.0	-0.012	.0147	-.0173	-.0116	-.0071	.0306
	-01.8	-0.004	.0120	-.0049	-.0099	-.0064	.0261
	000.1	-0.001	.0150	.0014	-.0097	-.0062	.0254
	002.2	0.001	.0111	.0100	-.0088	-.0058	.0229
	006.1	0.010	.0142	.0216	-.0081	-.0057	.0208
	010.1	0.024	.0168	.0342	-.0073	-.0052	.0165
	014.0	0.042	.0218	.0476	-.0068	-.0041	.0103
	017.9	0.067	.0312	.0647	-.0066	-.0031	.0045
1.10	-05.9	-0.015	.0177	-.0150	-.0111	-.0067	.0290
	-02.0	-0.008	.0158	-.0038	-.0100	-.0063	.0266
	000.2	-0.007	.0159	.0038	-.0094	-.0060	.0246
	002.1	-0.001	.0156	.0092	-.0088	-.0057	.0228
	006.1	0.008	.0166	.0208	-.0080	-.0054	.0203
	010.1	0.024	.0192	.0328	-.0074	-.0046	.0158
	014.0	0.042	.0244	.0473	-.0068	-.0038	.0090
	018.0	0.066	.0346	.0628	-.0066	-.0027	.0017
1.30	-05.9	-0.015	.0149	-.0160	-.0100	-.0059	.0249
	-01.9	-0.006	.0131	-.0048	-.0091	-.0056	.0227
	000.1	-0.002	.0126	.0013	-.0085	-.0053	.0211
	002.2	0.002	.0125	.0077	-.0079	-.0052	.0195
	006.1	0.012	.0134	.0192	-.0071	-.0048	.0163
	010.1	0.027	.0162	.0320	-.0066	-.0042	.0112
	014.0	0.048	.0222	.0458	-.0060	-.0034	.0037
	017.9	0.076	.0334	.0641	-.0054	-.0027	-.0036
1.70	-06.1	-0.021	.0162	-.0163	-.0078	-.0053	.0179
	-01.9	-0.009	.0134	-.0035	-.0076	-.0049	.0171
	000.2	-0.004	.0131	.0030	-.0074	-.0048	.0164
	002.0	0.001	.0128	.0085	-.0072	-.0047	.0155
	006.0	0.012	.0137	.0208	-.0065	-.0045	.0121
	010.1	0.031	.0173	.0348	-.0058	-.0039	.0058
	014.1	0.059	.0260	.0533	-.0050	-.0033	-.0020
	018.0	0.102	.0436	.0780	-.0036	-.0026	-.0118
2.22	-05.9	-0.021	.0143	-.0151	-.0057	-.0045	.0106
	-02.0	-0.009	.0120	-.0025	-.0055	-.0041	.0100
	000.1	-0.003	.0116	.0035	-.0054	-.0039	.0093
	002.1	0.001	.0113	.0106	-.0053	-.0039	.0085
	006.0	0.015	.0128	.0232	-.0049	-.0038	.0057
	010.1	0.040	.0176	.0404	-.0043	-.0036	-.0005
	014.0	0.078	.0301	.0615	-.0031	-.0037	-.0072
	018.1	0.123	.0518	.0835	-.0015	-.0037	-.0128

TABLE V.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 5^\circ$ - Continued
 (b) BVC; $\delta = 0.2^\circ$

M	α , deg	C_L	C_D	C_m	C_{L_1}	C_{Y_1}	C_{m_1}
0.70	-0.5.9	-0.050	.0166	-.0650	-.0085	-0.054	.0209
	-0.1.9	-0.020	.0123	-.0173	-.0083	-0.055	.0202
	-0.0.1	-0.006	.0116	.0005	-.0083	-0.057	.0206
	0.02.1	0.013	.0118	.0199	-.0083	-0.057	.0210
	0.06.0	0.044	.0156	.0679	-.0083	-0.048	.0191
	0.10.0	0.074	.0224	.1208	-.0051	-0.027	.0070
	0.14.0	0.110	.0357	.1770	-.0015	-0.016	-.0027
	0.18.0	0.152	.0571	.2390	-.0009	-0.014	-.0017
0.90	-0.6.0	-0.052	.0170	-.0703	-.0090	-0.054	.0227
	-0.3.2	-0.017	.0101	-.0174	-.0086	-0.056	.0216
	0.00.1	0.001	.0116	.0020	-.0088	-0.058	.0223
	0.02.0	0.013	.0120	.0209	-.0087	-0.058	.0225
	0.06.1	0.049	.0161	.0737	-.0086	-0.048	.0201
	0.10.1	0.083	.0235	.1302	-.0050	-0.024	.0062
	0.14.0	0.118	.0375	.1860	-.0015	-0.013	-.0027
	0.18.1	0.157	.0583	.2472	-.0005	-0.007	-.0020
1.00	-0.5.9	-0.046	.0219	-.0661	-.0106	-0.065	.0284
	-0.1.9	-0.014	.0143	-.0184	-.0098	-0.064	.0257
	-0.0.0	-0.002	.0164	.0041	-.0100	-0.066	.0266
	0.02.0	0.013	.0166	.0242	-.0100	-0.066	.0269
	0.06.1	0.047	.0177	.0766	-.0095	-0.052	.0229
	0.10.1	0.077	.0265	.1320	-.0051	-0.025	.0064
	0.14.0	0.114	.0401	.1874	-.0016	-0.011	-.0029
	0.18.0	0.152	.0586	.2419	.0007	-0.010	-.0050
1.10	-0.6.0	-0.051	.0242	-.0644	-.0103	-0.062	.0276
	-0.1.9	-0.018	.0195	-.0162	-.0098	-0.062	.0256
	0.00.1	-0.005	.0179	.0041	-.0098	-0.064	.0261
	0.02.1	0.010	.0189	.0256	-.0098	-0.063	.0265
	0.06.0	0.041	.0210	.0722	-.0092	-0.050	.0216
	0.10.1	0.072	.0291	.1238	-.0050	-0.026	.0061
	0.14.0	0.108	.0427	.1742	-.0022	-0.012	-.0026
	0.18.0	0.143	.0623	.2252	-.0000	-0.013	-.0064
1.30	-0.6.0	-0.047	.0197	-.0625	-.0091	-0.054	.0233
	-0.1.9	-0.018	.0149	-.0168	-.0088	-0.055	.0220
	0.00.1	-0.002	.0143	.0007	-.0088	-0.056	.0222
	0.02.1	0.014	.0147	.0192	-.0087	-0.056	.0221
	0.06.0	0.044	.0180	.0648	-.0081	-0.043	.0170
	0.10.0	0.075	.0254	.1130	-.0050	-0.026	.0064
	0.13.9	0.108	.0387	.1568	-.0027	-0.019	.0012
	0.18.0	0.143	.0590	.2053	.0006	-0.022	-.0036
1.70	-0.6.1	-0.046	.0198	-.0561	-.0074	-0.050	.0175
	-0.1.9	-0.017	.0152	-.0140	-.0075	-0.050	.0168
	0.00.1	-0.001	.0144	.0032	-.0075	-0.050	.0169
	0.01.9	0.009	.0147	.0204	-.0076	-0.050	.0169
	0.06.0	0.041	.0177	.0626	-.0066	-0.038	.0105
	0.10.0	0.068	.0251	.1041	-.0042	-0.027	.0016
	0.14.1	0.103	.0393	.1441	-.0020	-0.020	-.0051
	0.17.9	0.144	.0608	.1861	.0031	-0.021	-.0130
2.22	-0.6.1	-0.044	.0187	-.0487	-.0054	-0.044	.0111
	-0.1.9	-0.018	.0137	-.0100	-.0055	-0.042	.0102
	0.00.1	-0.001	.0129	.0048	-.0055	-0.042	.0101
	0.02.1	0.010	.0133	.0235	-.0055	-0.041	.0096
	0.06.1	0.039	.0166	.0608	-.0049	-0.034	.0049
	0.10.1	0.069	.0247	.0975	-.0034	-0.027	-.0017
	0.14.0	0.115	.0415	.1323	-.0011	-0.024	-.0075
	0.18.0	0.166	.0682	.1711	.0023	-0.027	-.0115

TABLE V.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 5^\circ$ - Continued
 (c) BVC; $\delta = 10.2^\circ$

M	α , deg	C_L	C_D	C_m	C_l	C_y	C_n
0.70	-0.5.9	-0.013	.0133	-.0095	-.0091	-.0056	.0202
	-0.1.9	0.018	.0146	.0327	-.0093	-.0064	.0225
	0.00.1	0.034	.0166	.0556	-.0095	-.0066	.0242
	0.02.2	0.051	.0202	.0810	-.0098	-.0067	.0262
	0.06.1	0.086	.0293	.1303	-.0096	-.0053	.0237
	0.10.0	0.116	.0410	.1878	-.0051	-.0017	.0057
	0.13.9	0.135	.0538	.2295	-.0014	0.003	.0026
	0.18.0	0.155	.0698	.2599	.0025	0.010	.0057
0.90	-0.6.0	-0.012	.0138	-.0090	-.0098	-.0059	.0225
	-0.2.0	0.019	.0149	.0360	-.0098	-.0067	.0248
	0.00.1	0.036	.0178	.0612	-.0101	-.0071	.0268
	0.02.1	0.055	.0211	.0842	-.0104	-.0070	.0283
	0.06.2	0.091	.0310	.1392	-.0097	-.0053	.0244
	0.10.0	0.121	.0418	.1930	-.0052	-.0014	.0072
	0.13.9	0.140	.0541	.2328	-.0012	0.008	.0055
	0.18.1	0.159	.0710	.2652	.0026	0.011	.0019
1.00	-0.5.9	-0.008	.0192	-.0084	-.0117	-.0068	.0286
	-0.1.9	0.020	.0180	.0379	-.0110	-.0073	.0290
	0.00.1	0.037	.0233	.0609	-.0114	-.0076	.0313
	0.02.0	0.053	.0238	.0842	-.0116	-.0076	.0326
	0.06.1	0.089	.0349	.1359	-.0110	-.0059	.0288
	0.10.1	0.116	.0430	.1916	-.0050	-.0016	.0060
	0.14.0	0.142	.0614	.2427	-.0006	0.003	-.0023
	0.18.0	0.166	.0798	.2857	.0023	0.005	-.0008
1.10	-0.6.1	-0.014	.0200	-.0101	-.0115	-.0067	.0285
	-0.2.0	0.016	.0214	.0362	-.0110	-.0070	.0285
	0.00.1	0.034	.0240	.0591	-.0111	-.0073	.0301
	0.02.1	0.047	.0267	.0820	-.0112	-.0072	.0309
	0.06.0	0.079	.0356	.1265	-.0104	-.0054	.0256
	0.10.1	0.104	.0449	.1788	-.0049	-.0017	.0049
	0.14.0	0.129	.0606	.2260	-.0010	0.002	-.0028
	0.18.0	0.153	.0801	.2691	.0020	0.004	-.0037
1.30	-0.6.0	-0.016	.0174	-.0093	-.0100	-.0058	.0233
	-0.1.9	0.017	.0178	.0327	-.0101	-.0063	.0253
	-0.00.0	0.031	.0194	.0521	-.0103	-.0067	.0272
	0.02.0	0.045	.0224	.0713	-.0107	-.0068	.0291
	0.06.0	0.077	.0302	.1154	-.0098	-.0051	.0224
	0.10.1	0.105	.0409	.1620	-.0057	-.0021	.0098
	0.14.0	0.128	.0554	.2054	-.0026	-.0007	.0050
	0.18.0	0.142	.0712	.2543	.0018	-.0001	.0032
1.70	-0.6.0	-0.020	.0177	-.0069	-.0078	-.0050	.0163
	-0.1.9	0.012	.0174	.0317	-.0081	-.0055	.0181
	0.00.1	0.025	.0191	.0493	-.0083	-.0057	.0191
	0.02.1	0.039	.0216	.0676	-.0084	-.0058	.0194
	0.06.0	0.065	.0271	.1034	-.0071	-.0036	.0101
	0.10.1	0.091	.0377	.1425	-.0047	-.0019	.0042
	0.14.0	0.117	.0521	.1814	-.0015	-.0004	-.0021
	0.18.0	0.153	.0746	.2151	.0038	-.0009	-.0092
2.22	-0.6.0	-0.020	.0161	-.0057	-.0058	-.0041	.0097
	-0.1.9	0.008	.0157	.0296	-.0059	-.0045	.0105
	0.00.1	0.021	.0169	.0460	-.0060	-.0045	.0107
	0.02.1	0.034	.0190	.0616	-.0061	-.0043	.0104
	0.06.1	0.061	.0249	.0942	-.0053	-.0029	.0044
	0.10.0	0.089	.0352	.1289	-.0041	-.0019	.0008
	0.13.9	0.121	.0514	.1613	-.0011	-.0015	-.0064
	0.18.0	0.168	.0772	.1992	.0006	-.0007	-.0095

TABLE V.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 5^\circ$ - Continued
 (d) BC; $\delta = 0.2^\circ$

M	α , deg	C_L	C_D	C_m	C_L	C_Y	C_n
0.70	-0.60	-0.048	.0122	-.0696	.0003	-0.003	-.0092
	-0.20	-0.017	.0077	-.0208	.0001	-0.003	-.0103
	0.001	0.001	.0070	-.0009	.0000	-0.004	-.0104
	0.020	0.009	.0075	.0204	-0.0000	-0.005	-.0102
	0.060	0.040	.0108	.0700	-0.0001	-0.003	-.0094
	0.101	0.071	.0194	.1254	-0.0002	-0.007	-.0076
	0.140	0.105	.0335	.1798	-0.0004	-0.013	-.0051
	0.180	0.144	.0545	.2415	-0.0002	-0.021	-.0018
0.90	-0.59	-0.046	.0116	-.0705	.0002	-0.004	-.0092
	-0.20	-0.014	.0075	-.0203	.0001	-0.005	-.0103
	0.001	-0.001	.0067	.0021	-0.0000	-0.005	-.0104
	0.020	0.011	.0075	.0227	-0.0000	-0.005	-.0103
	0.060	0.044	.0111	.0754	-0.0001	-0.004	-.0092
	0.101	0.077	.0207	.1328	-0.0002	-0.005	-.0075
	0.140	0.112	.0353	.1875	-0.0003	-0.009	-.0050
	0.180	0.149	.0559	.2489	-0.0002	-0.016	-.0027
1.00	-0.60	-0.048	.0175	-.0682	.0002	-0.001	-.0104
	-0.20	-0.012	.0082	-.0189	-0.0000	-0.003	-.0114
	-0.000	0.003	.0092	.0024	-0.0000	-0.003	-.0114
	0.021	0.015	.0083	.0256	.0000	-0.004	-.0113
	0.060	0.046	.0153	.0770	-0.0001	-0.003	-.0102
	0.101	0.078	.0243	.1333	-0.0001	-0.006	-.0079
	0.141	0.112	.0394	.1888	-0.0002	-0.010	-.0042
	0.180	0.149	.0608	.2440	-0.0002	-0.024	-.0008
1.10	-0.61	-0.049	.0175	-.0665	.0002	-0.001	-.0101
	-0.32	-0.015	.0082	-.0183	.0000	-0.003	-.0107
	0.001	-0.003	.0117	.0039	-0.0001	-0.004	-.0107
	0.021	0.013	.0121	.0256	.0000	-0.005	-.0104
	0.061	0.040	.0164	.0727	-0.0002	-0.003	-.0098
	0.100	0.069	.0261	.1240	-0.0002	-0.007	-.0076
	0.140	0.105	.0415	.1761	-0.0002	-0.010	-.0053
	0.181	0.137	.0612	.2293	-0.0002	-0.027	-.0011
1.30	-0.60	-0.044	.0146	-.0668	.0002	-0.007	-.0090
	-0.20	-0.015	.0100	-.0200	.0001	-0.006	-.0099
	0.001	-0.001	.0094	.0014	-0.0000	-0.006	-.0101
	0.020	0.011	.0102	.0209	-0.0000	-0.006	-.0101
	0.061	0.042	.0137	.0663	-0.0001	-0.005	-.0093
	0.101	0.072	.0234	.1147	-0.0001	-0.008	-.0075
	0.139	0.102	.0367	.1584	-0.0001	-0.015	-.0034
	0.180	0.138	.0576	.2076	-0.0002	-0.036	-.0046
1.70	-0.61	-0.043	.0151	-.0592	.0001	-0.009	-.0102
	-0.20	-0.014	.0108	-.0166	.0000	-0.009	-.0109
	0.001	-0.002	.0103	.0027	-0.0000	-0.009	-.0111
	0.021	0.011	.0107	.0216	-0.0000	-0.009	-.0111
	0.061	0.039	.0147	.0634	-0.0001	-0.008	-.0107
	0.101	0.067	.0235	.1056	-0.0001	-0.013	-.0091
	0.140	0.078	.0451	.1451	-0.0001	-0.020	-.0061
	0.180	0.144	.0618	.1877	-0.0001	-0.039	-.0015
2.22	-0.61	-0.039	.0141	-.0528	.0001	-0.012	-.0100
	-0.19	-0.012	.0096	-.0141	-0.0000	-0.010	-.0108
	0.001	-0.001	.0091	.0039	-0.0001	-0.010	-.0109
	0.020	0.010	.0097	.0212	-0.0001	-0.010	-.0109
	0.061	0.038	.0139	.0607	-0.0001	-0.012	-.0104
	0.099	0.066	.0225	.0973	-0.0001	-0.018	-.0086
	0.141	0.114	.0414	.1347	-0.0002	-0.027	-.0068
	0.180	0.163	.0671	.1726	-0.0002	-0.036	-.0052

TABLE V.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 5^\circ$ - Continued
 (e) BC; $\delta = 9.6^\circ$

M	α , deg	C_L	C_D	C_m	C_L	C_Y	C_n
0.70	-06.0	-0.013	.0073	-.0145	.0001	0.008	-.0107
	-01.9	0.017	.0089	.0289	.0001	-0.004	-.0112
	000.1	0.033	.0113	.0506	-.0000	-0.008	-.0111
	001.9	0.048	.0147	.0728	-.0000	-0.010	-.0112
	006.2	0.083	.0251	.1290	-.0000	-0.013	-.0107
	010.1	0.111	.0399	.1855	-.0000	-0.020	-.0079
	014.1	0.137	.0565	.2280	.0001	-0.026	-.0005
	018.0	0.158	.0751	.2597	.0007	-0.047	.0154
0.90	-05.9	-0.011	.0072	-.0125	.0001	0.005	-.0109
	-02.0	0.019	.0090	.0314	.0001	-0.005	-.0113
	-00.0	0.036	.0117	.0540	.0001	-0.009	-.0113
	002.0	0.052	.0151	.0780	.0001	-0.010	-.0114
	006.0	0.085	.0254	.1322	.0001	-0.011	-.0111
	010.0	0.116	.0401	.1889	.0000	-0.014	-.0071
	014.0	0.145	.0573	.2320	.0006	-0.019	.0044
	018.0	0.157	.0741	.2614	.0004	-0.042	.0142
1.00	-06.0	-0.011	.0103	-.0119	.0000	0.016	-.0113
	-01.9	0.017	.0143	.0340	-.0000	-0.002	-.0116
	000.1	0.033	.0143	.0566	-.0001	-0.008	-.0118
	002.1	0.049	.0205	.0810	.0000	-0.014	-.0121
	006.1	0.084	.0298	.1331	.0000	-0.021	-.0111
	010.1	0.109	.0458	.1899	-.0001	-0.033	-.0081
	014.1	0.140	.0644	.2405	-.0001	-0.051	-.0013
	018.0	0.163	.0853	.2812	.0000	-0.070	.0069
1.10	-06.0	-0.014	.0123	-.0122	.0001	0.015	-.0107
	-01.9	0.014	.0140	.0320	-.0000	-0.003	-.0109
	000.1	0.028	.0176	.0555	-.0001	-0.009	-.0111
	002.0	0.045	.0212	.0765	-.0000	-0.013	-.0116
	006.0	0.075	.0310	.1253	-.0000	-0.019	-.0112
	010.1	0.101	.0464	.1774	-.0001	-0.034	-.0078
	014.0	0.127	.0642	.2223	-.0001	-0.049	-.0021
	018.0	0.155	.0867	.2653	-.0001	-0.075	.0076
1.30	-06.1	-0.014	.0108	-.0141	.0001	0.001	-.0110
	-01.9	0.017	.0119	.0285	.0000	-0.007	-.0109
	000.1	0.031	.0141	.0484	-.0000	-0.010	-.0107
	002.1	0.046	.0167	.0692	-.0000	-0.011	-.0109
	006.1	0.077	.0264	.1135	-.0000	-0.012	-.0110
	010.1	0.104	.0391	.1592	.0000	-0.013	-.0072
	018.0	0.155	.0773	.2405	-.0000	-0.041	.0100
1.70	-06.0	-0.016	.0117	-.0113	-.0000	-0.001	-.0116
	-02.1	0.010	.0124	.0254	-.0000	-0.009	-.0116
	000.1	0.027	.0144	.0445	-.0000	-0.012	-.0115
	002.1	0.040	.0169	.0626	-.0000	-0.013	-.0120
	006.0	0.067	.0248	.1004	.0000	-0.014	-.0126
	010.0	0.090	.0363	.1402	.0000	-0.016	-.0088
	014.0	0.116	.0526	.1787	-.0000	-0.028	-.0022
	018.0	0.155	.0778	.2132	-.0000	-0.048	.0012
2.22	-06.0	-0.017	.0106	-.0112	-.0001	-0.001	-.0110
	-01.9	0.009	.0110	.0249	-.0002	-0.009	-.0111
	000.1	0.022	.0124	.0415	-.0002	-0.012	-.0114
	002.1	0.034	.0152	.0581	-.0001	-0.014	-.0119
	006.0	0.059	.0225	.0910	-.0002	-0.017	-.0120
	010.1	0.086	.0347	.1272	-.0002	-0.024	-.0092
	014.0	0.123	.0532	.1599	-.0002	-0.044	-.0052
	017.9	0.168	.0789	.1954	-.0001	-0.045	-.0021


TABLE V.- AERODYNAMIC CHARACTERISTICS OF WING-OFF CONFIGURATIONS
 AT $\beta = 5^\circ$ - Concluded
 (f) B

M	c_d deg	C_L	C_D	C_m	C_L	C_T	C_n
0.70	-0.59	-0.011	.0082	-.0175	.0001	-0.0008	-.0095
	-0.19	-0.003	.0067	-.0058	.0000	-0.0007	-.0098
	0.001	-0.000	.0064	.0004	.0001	-0.0006	-.0100
	0.021	0.001	.0064	.0073	.0000	-0.0006	-.0101
	0.060	0.008	.0072	.0192	.0000	-0.0008	-.0098
	0.100	0.021	.0097	.0310	.0001	-0.011	-.0097
	0.140	0.039	.0149	.0441	.0000	-0.014	-.0100
	0.180	0.063	.0246	.0571	.0001	-0.013	-.0110
0.90	-0.59	-0.010	.0078	-.0180	.0000	-0.0008	-.0097
	-0.20	-0.003	.0064	-.0054	.0000	-0.0007	-.0102
	0.001	-0.000	.0064	.0015	.0000	-0.0006	-.0102
	0.019	0.000	.0061	.0071	.0001	-0.0006	-.0102
	0.059	0.010	.0073	.0188	.0000	-0.0008	-.0100
	0.100	0.023	.0102	.0315	.0001	-0.011	-.0101
	0.139	0.041	.0159	.0447	.0001	-0.013	-.0104
	0.181	0.066	.0256	.0613	.0001	-0.015	-.0114
0.95	-0.59	-0.017	.0103	-.0160	-.0001	-0.0008	-.0097
	-0.19	-0.008	.0066	-.0034	-.0001	-0.0005	-.0103
	0.001	-0.004	.0074	.0024	-.0001	-0.0006	-.0102
	0.022	-0.005	.0078	.0106	-.0001	-0.0006	-.0101
	0.061	0.003	.0074	.0228	-.0000	-0.0007	-.0100
	0.101	0.018	.0114	.0353	-.0001	-0.011	-.0100
	0.140	0.039	.0168	.0495	-.0000	-0.014	-.0105
	0.181	0.066	.0270	.0664	-.0000	-0.013	-.0120
1.00	-0.58	-0.015	.0133	-.0154	-.0000	-0.0009	-.0096
	-0.19	-0.005	.0077	-.0043	.0000	-0.0006	-.0105
	0.001	-0.000	.0108	.0013	.0000	-0.0005	-.0108
	0.020	0.001	.0089	.0086	.0001	-0.0005	-.0108
	0.061	0.010	.0109	.0218	.0001	-0.0007	-.0106
	0.100	0.023	.0124	.0344	.0002	-0.011	-.0105
	0.140	0.046	.0201	.0475	.0001	-0.014	-.0108
	0.181	0.071	.0323	.0647	.0001	-0.013	-.0125
1.05	-0.59	-0.017	.0133	-.0162	-.0001	-0.0009	-.0092
	-0.19	-0.008	.0114	-.0033	-.0000	-0.0008	-.0095
	0.002	-0.008	.0107	.0045	-.0001	-0.0007	-.0095
	0.021	-0.006	.0108	.0107	-.0001	-0.0008	-.0095
	0.061	0.005	.0121	.0224	-.0001	-0.010	-.0093
	0.101	0.022	.0150	.0347	-.0001	-0.013	-.0094
	0.140	0.041	.0207	.0497	-.0001	-0.017	-.0098
	0.180	0.069	.0316	.0663	-.0000	-0.017	-.0110
1.10	-0.19	-0.008	.0100	-.0032	-.0000	-0.0006	-.0100
	0.002	-0.004	.0109	.0029	-.0000	-0.0005	-.0102
	0.021	-0.005	.0111	.0105	-.0000	-0.0006	-.0099
	0.061	0.005	.0119	.0217	-.0000	-0.0009	-.0097
	0.102	0.023	.0158	.0336	-.0000	-0.011	-.0100
	0.141	0.043	.0219	.0466	.0001	-0.014	-.0108
	0.180	0.071	.0337	.0626	.0000	-0.013	-.0127
1.30	-0.61	-0.012	.0106	-.0189	.0000	-0.010	-.0097
	-0.33	-0.002	.0073	-.0067	.0000	-0.0007	-.0101
	0.001	0.001	.0087	.0002	.0000	-0.0007	-.0102
	0.020	0.002	.0086	.0065	.0000	-0.0007	-.0101
	0.060	0.012	.0097	.0189	.0001	-0.010	-.0099
	0.101	0.026	.0130	.0326	.0001	-0.014	-.0102
	0.140	0.048	.0204	.0483	.0001	-0.018	-.0103
	0.180	0.076	.0325	.0678	.0001	-0.020	-.0121
1.70	-0.61	-0.016	.0116	-.0193	.0000	-0.013	-.0105
	-0.20	-0.005	.0096	-.0066	.0000	-0.010	-.0107
	0.001	-0.001	.0092	.0000	.0000	-0.0009	-.0109
	0.020	0.001	.0090	.0072	.0000	-0.0009	-.0109
	0.059	0.012	.0104	.0197	.0000	-0.011	-.0112
	0.101	0.030	.0145	.0349	.0001	-0.015	-.0121
	0.140	0.059	.0239	.0538	.0001	-0.019	-.0137
	0.180	0.103	.0427	.0808	.0001	-0.025	-.0157
1.90	-0.60	-0.018	.0110	-.0177	-.0000	-0.014	-.0101
	-0.19	-0.007	.0085	-.0045	-.0000	-0.011	-.0103
	0.001	-0.004	.0087	.0022	-.0000	-0.010	-.0104
	0.021	-0.001	.0086	.0093	-.0000	-0.010	-.0104
	0.061	0.012	.0101	.0219	.0000	-0.013	-.0106
	0.101	0.033	.0147	.0377	.0000	-0.018	-.0115
	0.140	0.067	.0241	.0584	.0000	-0.025	-.0135
	0.179	0.110	.0452	.0826	.0001	-0.031	-.0154
2.22	-0.59	-0.019	.0109	-.0185	-.0000	-0.015	-.0104
	-0.20	-0.007	.0088	-.0049	-.0000	-0.012	-.0106
	0.001	-0.004	.0084	.0023	-.0000	-0.011	-.0106
	0.020	0.001	.0085	.0092	-.0000	-0.011	-.0107
	0.060	0.014	.0102	.0233	-.0000	-0.015	-.0110
	0.101	0.039	.0156	.0410	-.0000	-0.022	-.0120
	0.140	0.077	.0288	.0619	.0000	-0.031	-.0133
	0.179	0.122	.0501	.0829	.0001	-0.039	-.0139

~~CONFIDENTIAL~~


NACA RM A57K14

~~CONFIDENTIAL~~

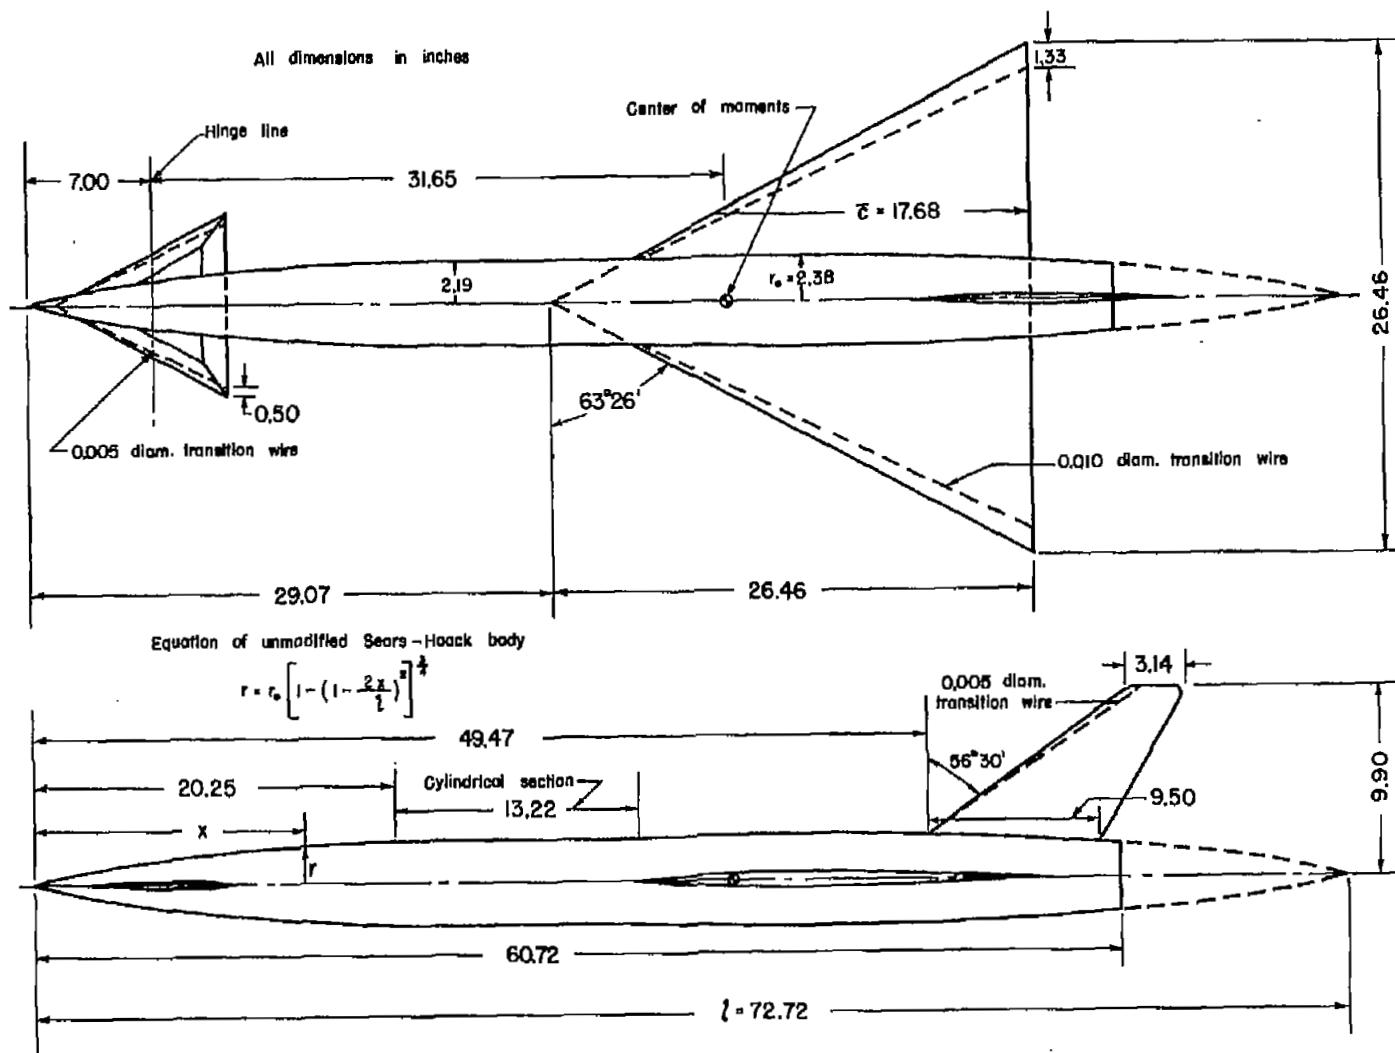


(a) Dimensional sketch of complete model.

Figure 1.- Model details and dimensions.

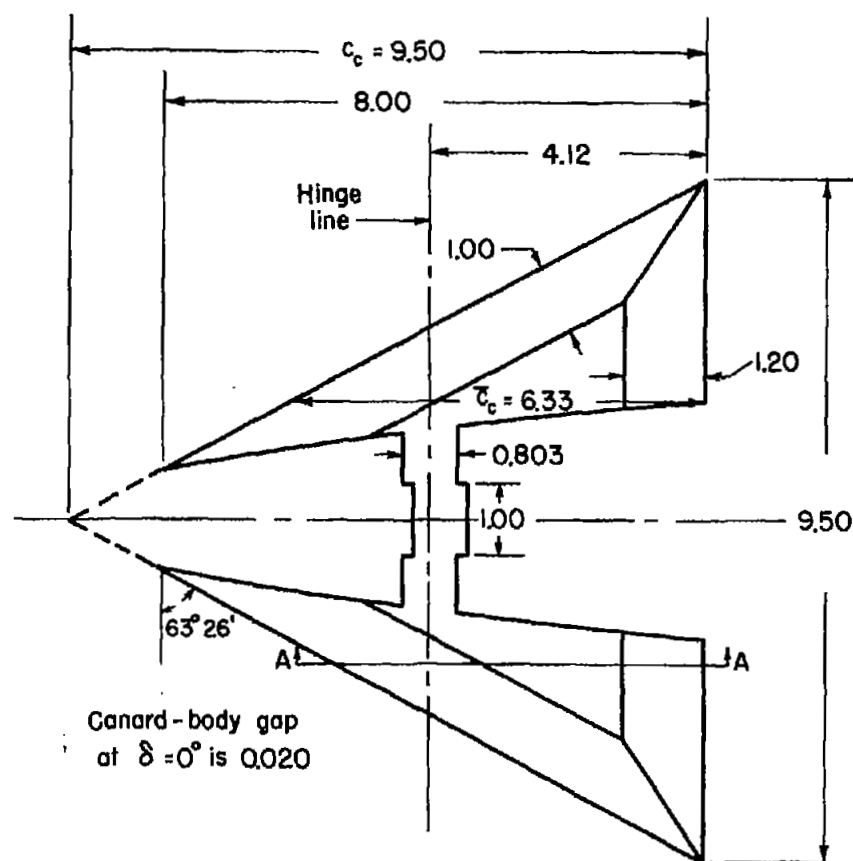

Canard-body gap
at $\delta = 0^\circ$ is 0.020

All dimensions in inches



(b) Details of canard.

Figure 1.- Concluded.


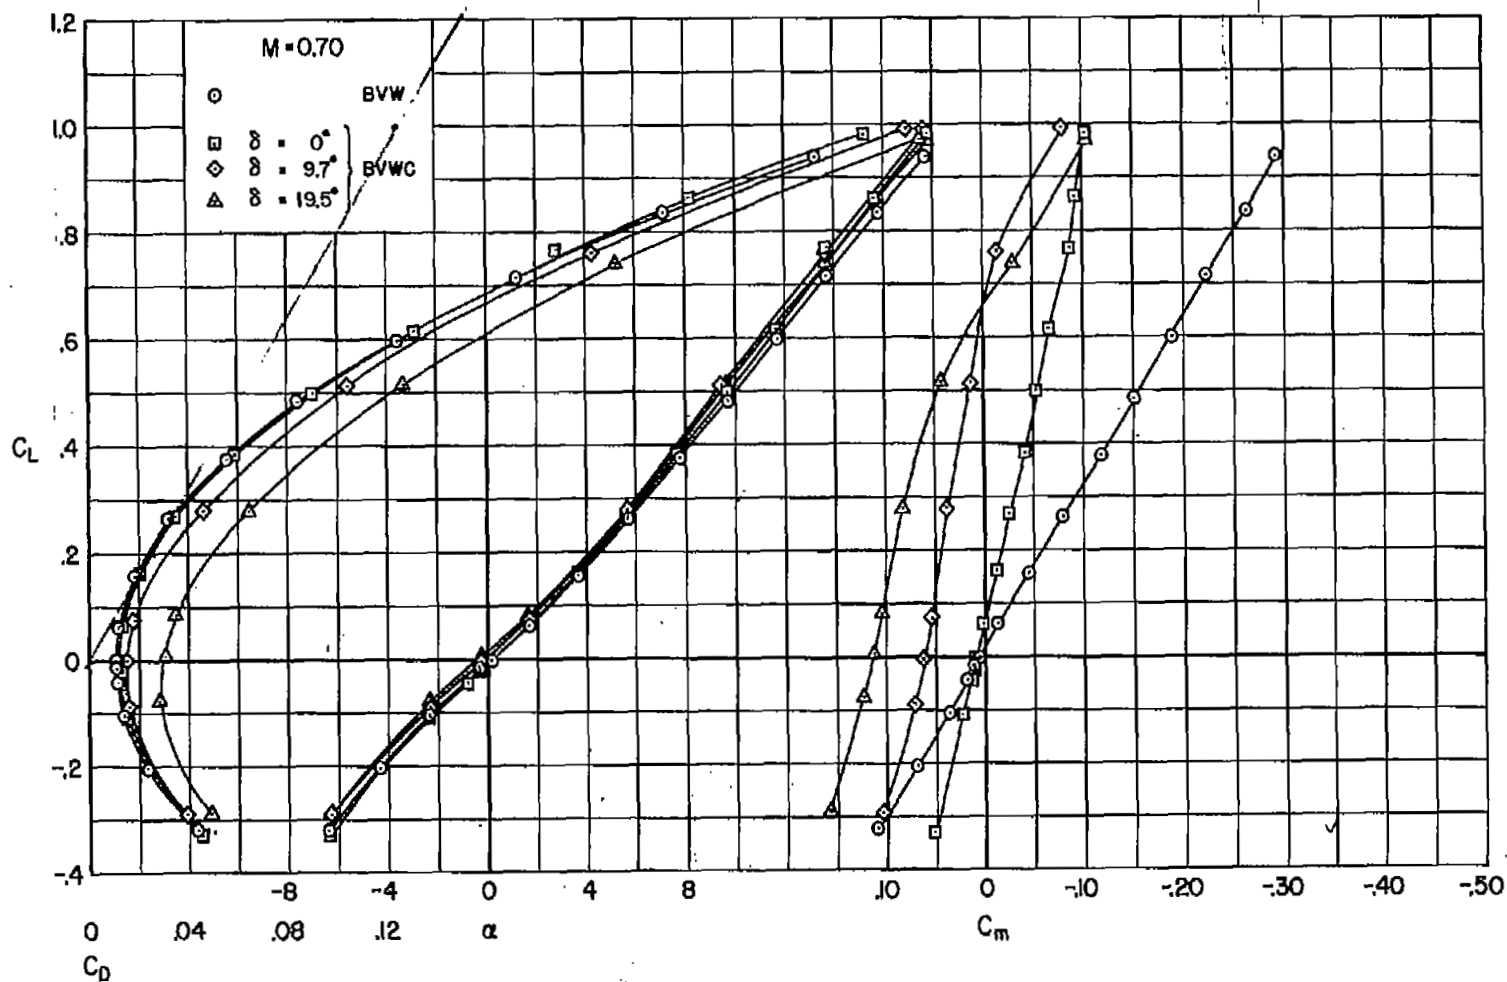
(a) $M = 0.70$

Figure 2.- Lift, drag, and pitching-moment characteristics with the canard on at constant deflection angles and with the canard off.

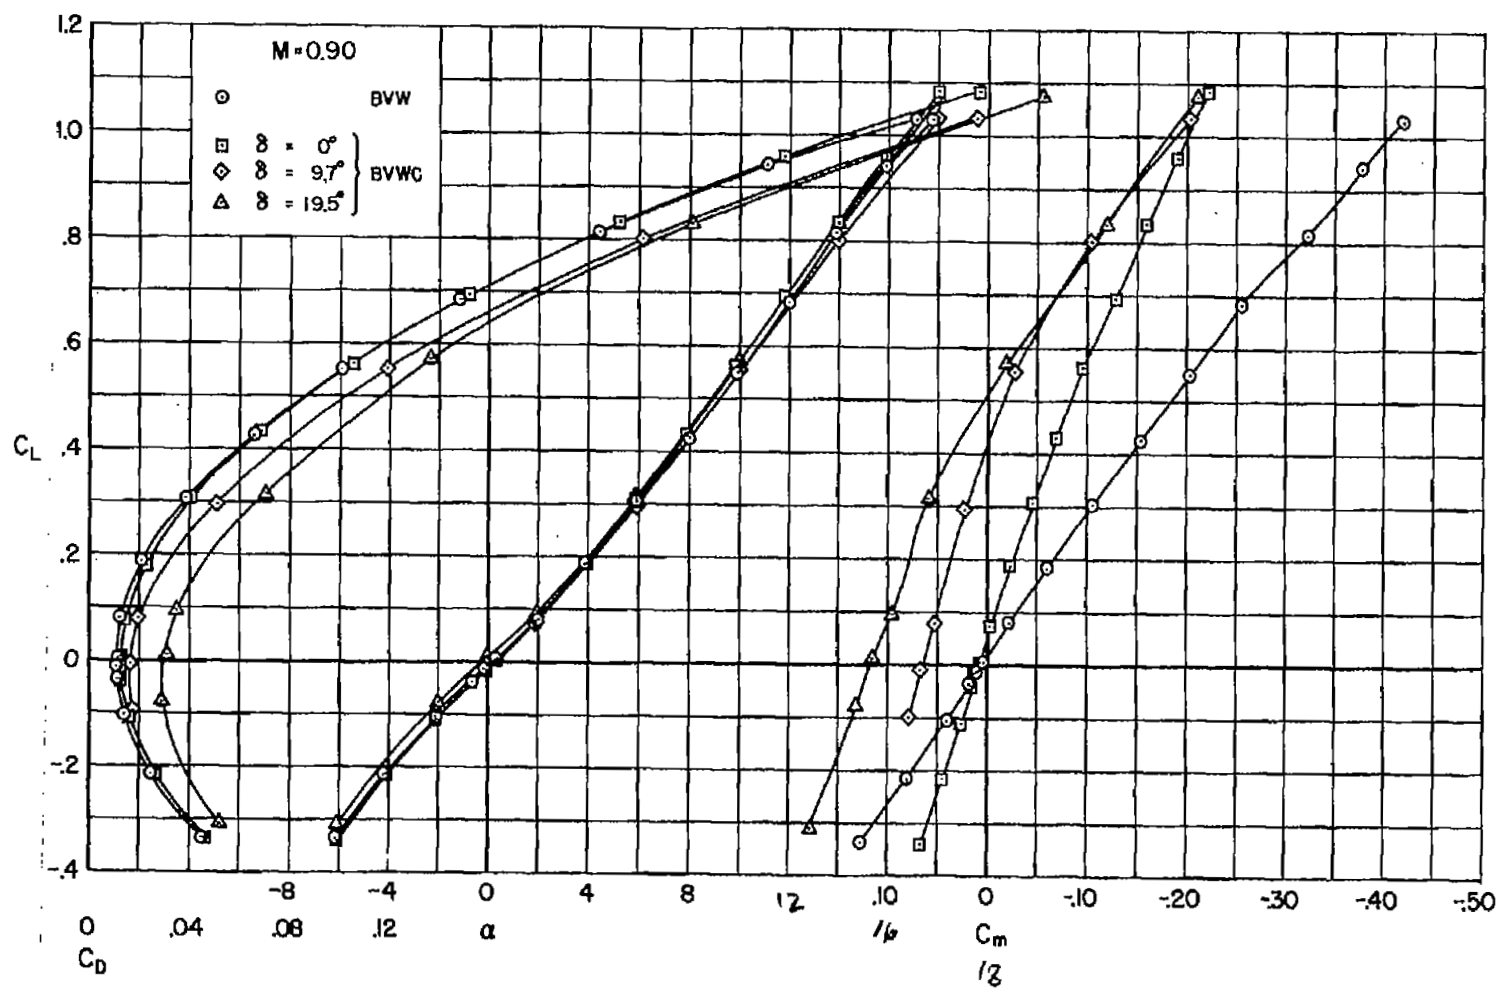

(b) $M = 0.90$

Figure 2.- Continued.

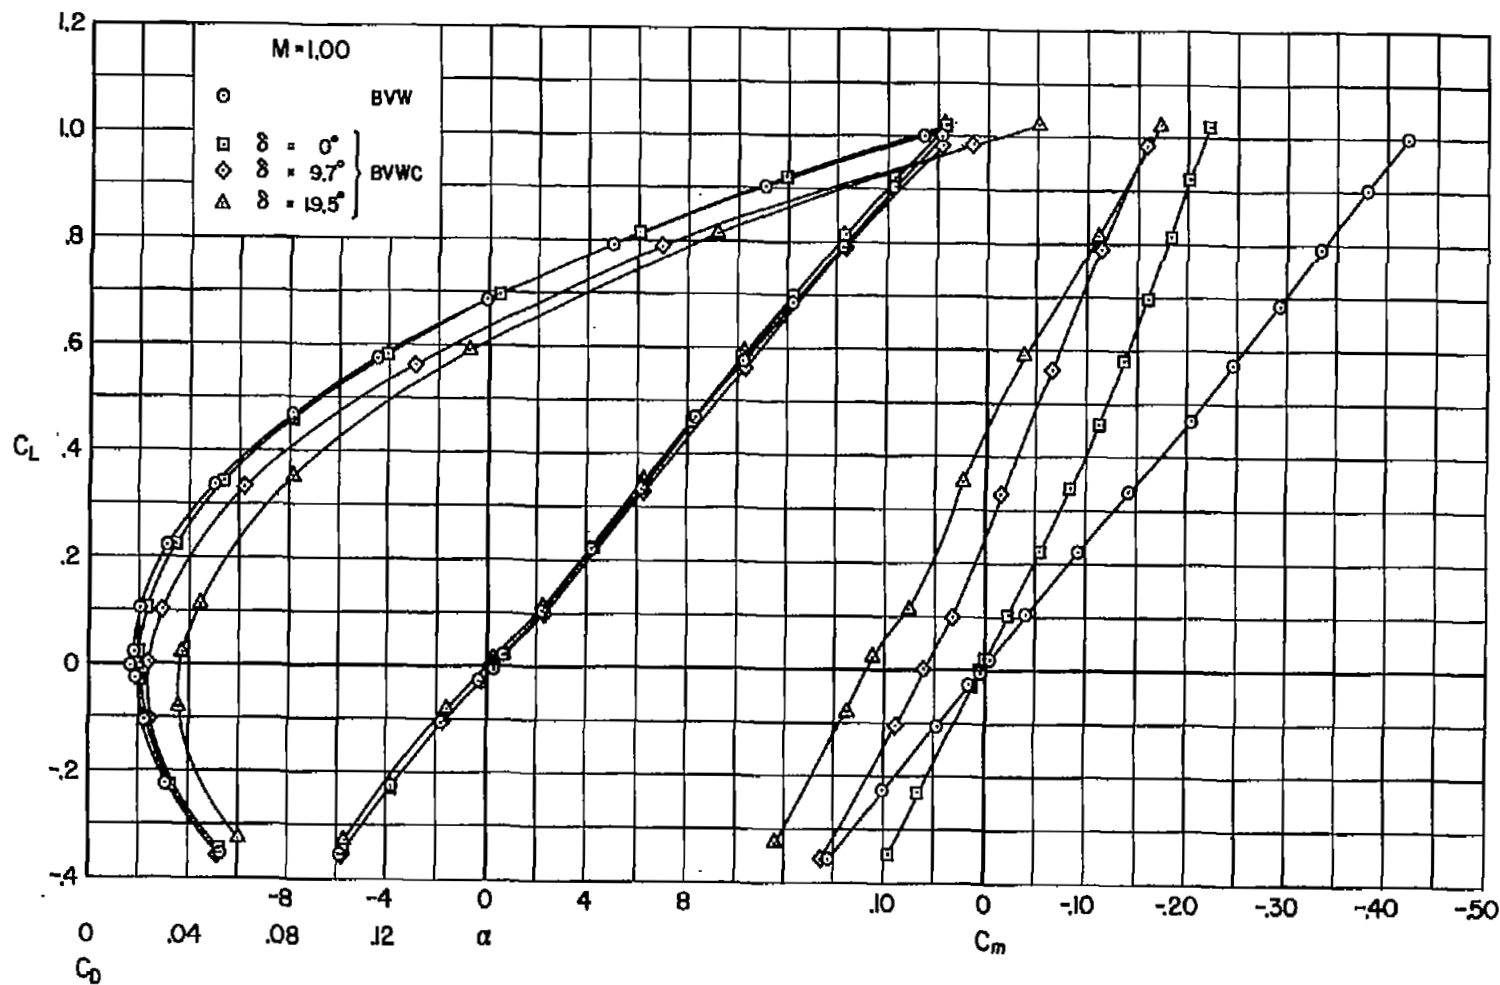
(c) $M = 1.00$

Figure 2.- Continued.

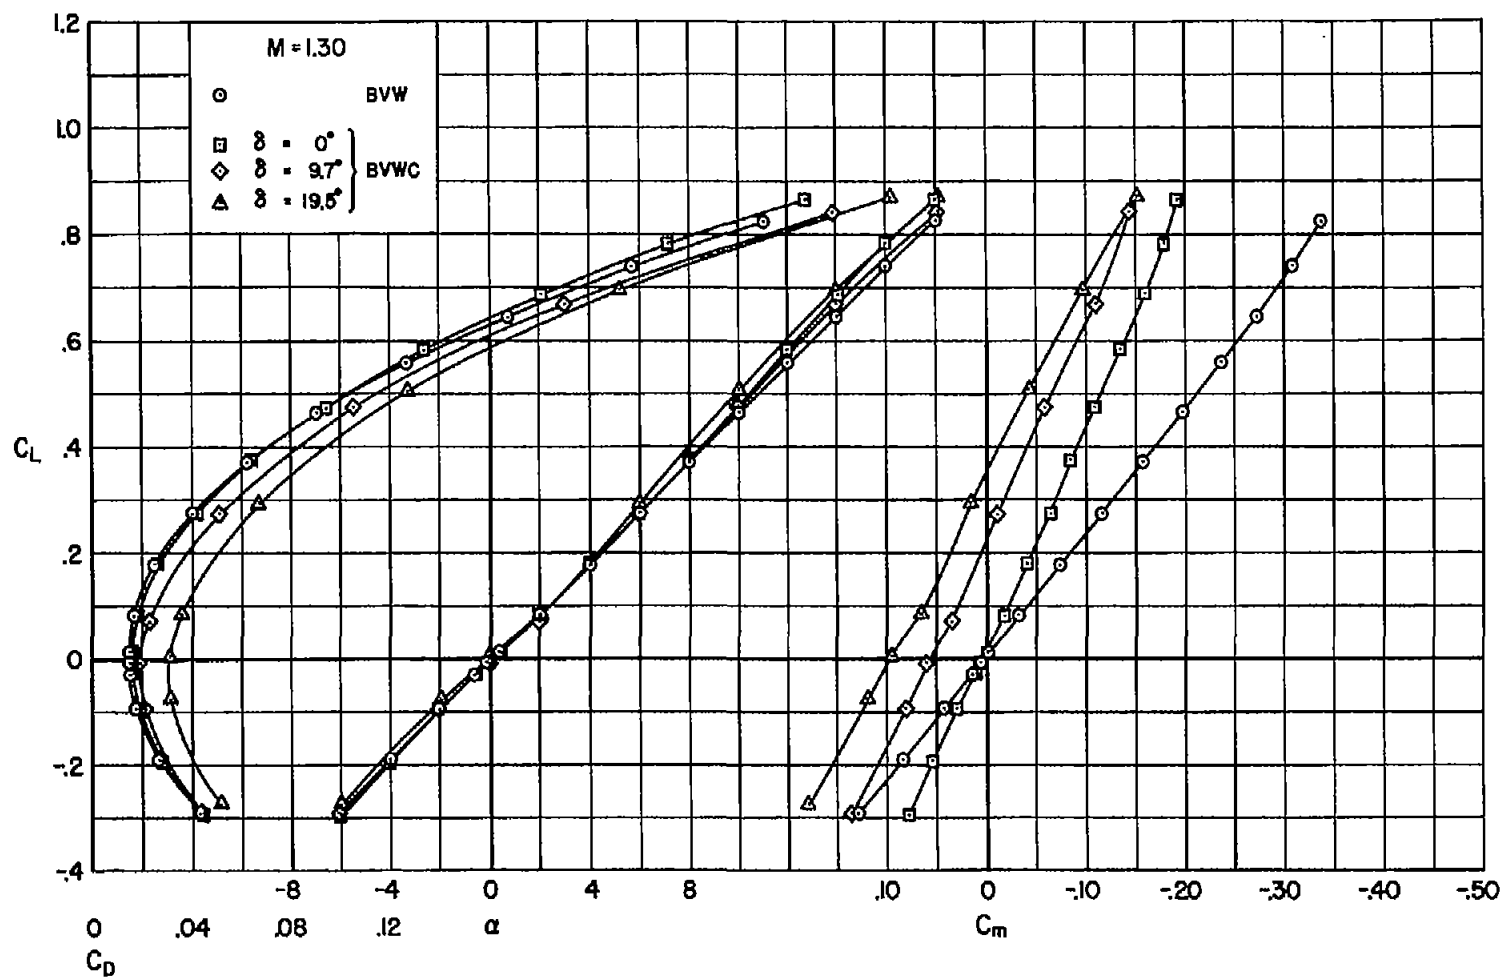
(d) $M = 1.30$

Figure 2.- Continued.

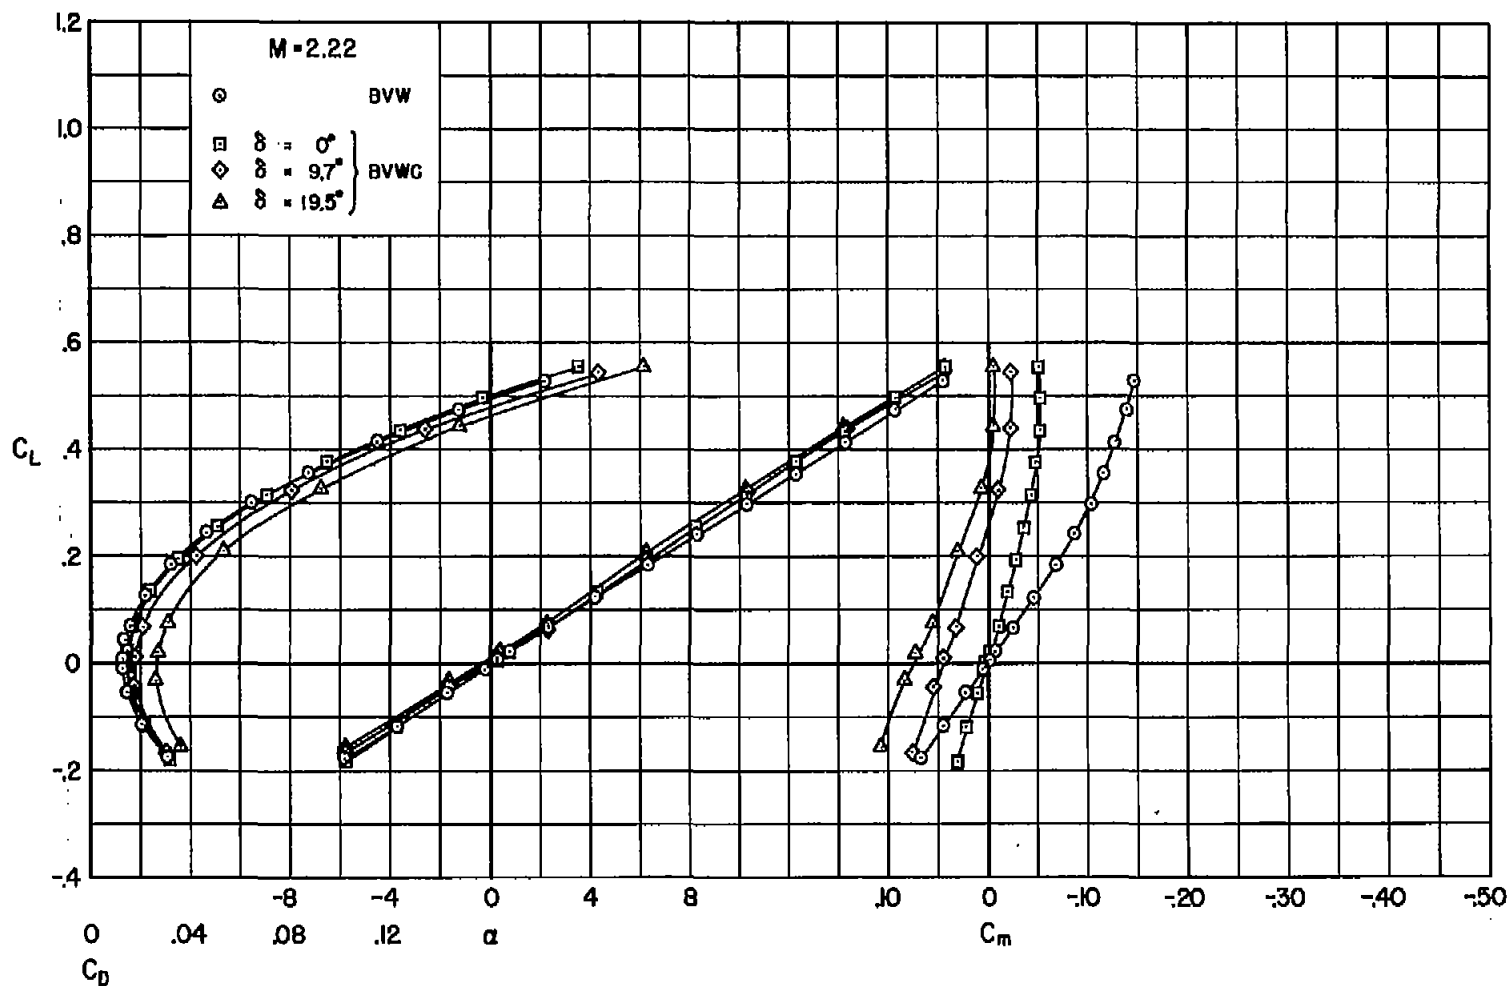
(e) $M = 2.22$

Figure 2.- Concluded.

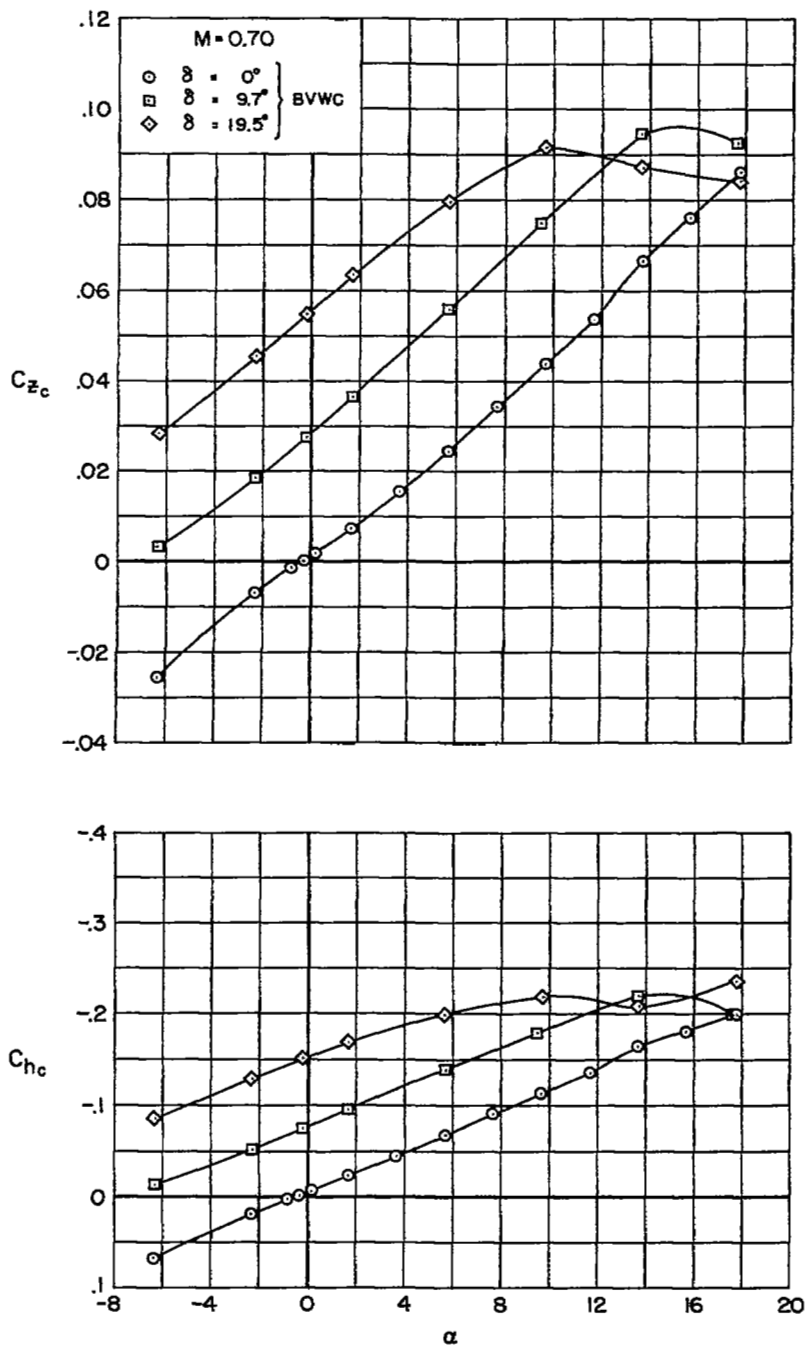
(a) $M = 0.70$

Figure 3.- Variations of canard normal-force and hinge-moment coefficients as a function of angle of attack at constant deflection angles.

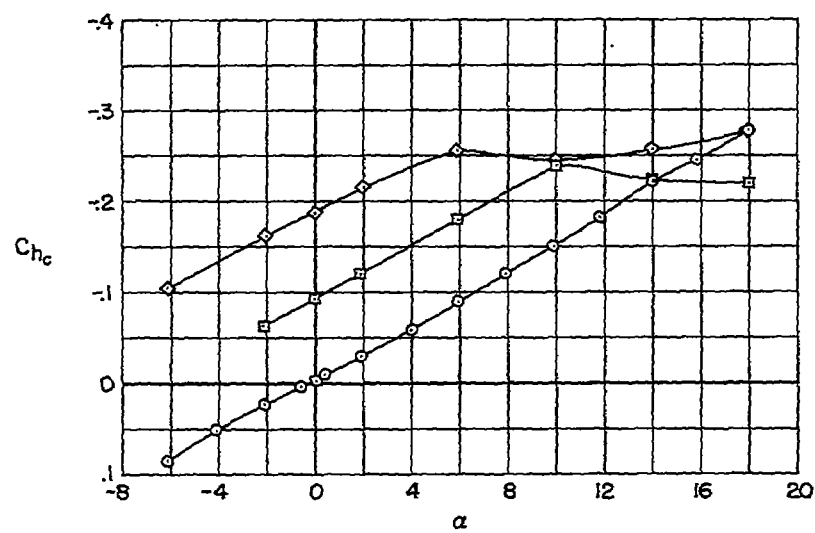
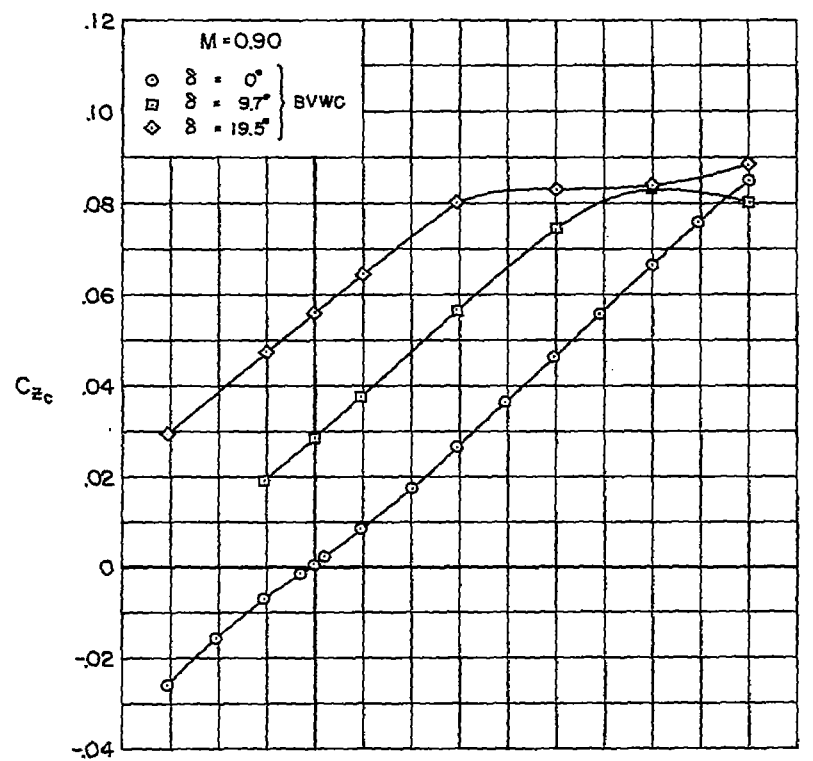
(b) $M = 0.90$

Figure 3.- Continued.

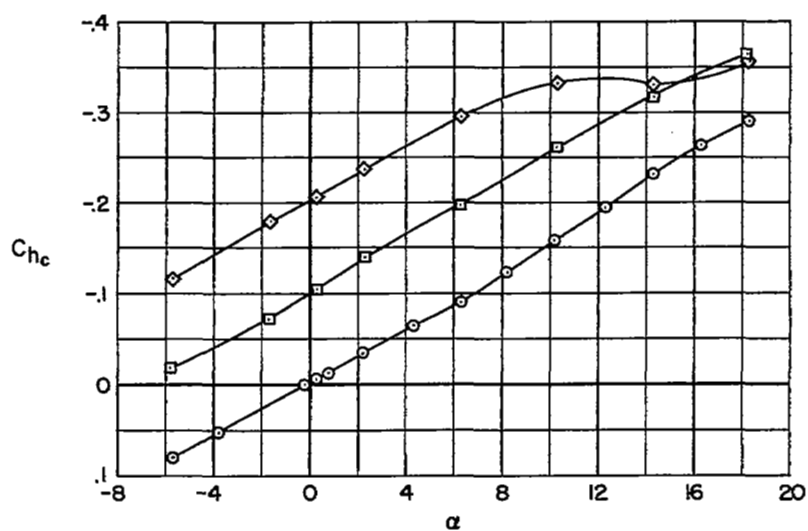
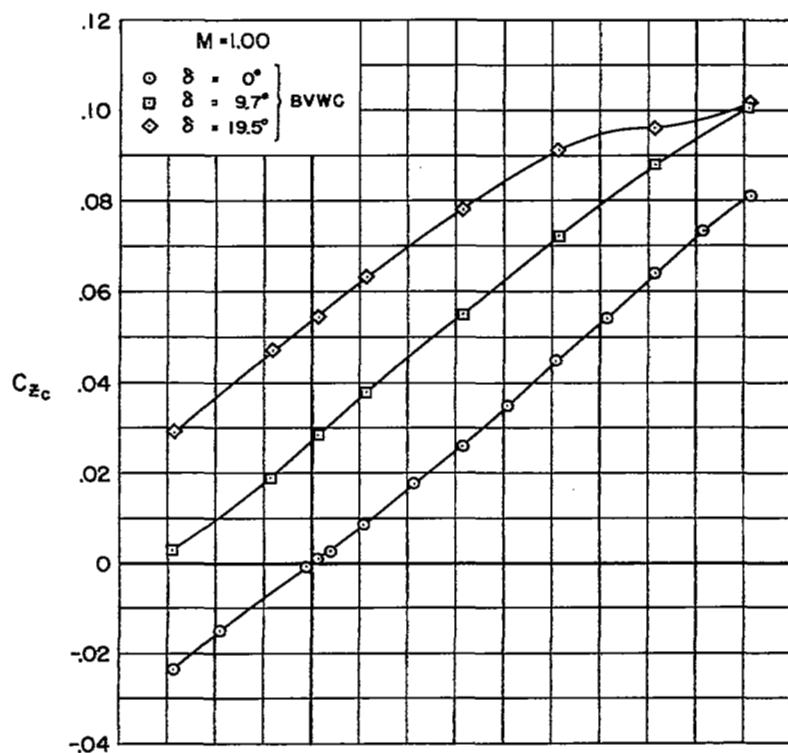
(c) $M = 1.00$

Figure 3.- Continued.

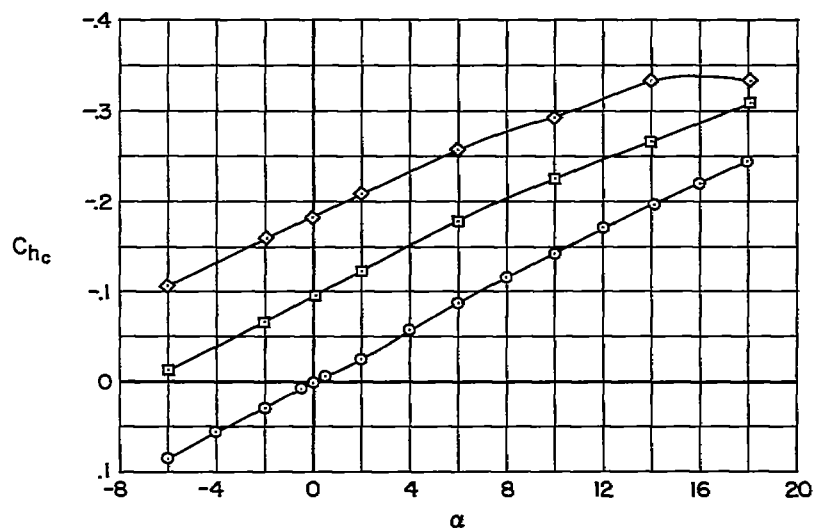
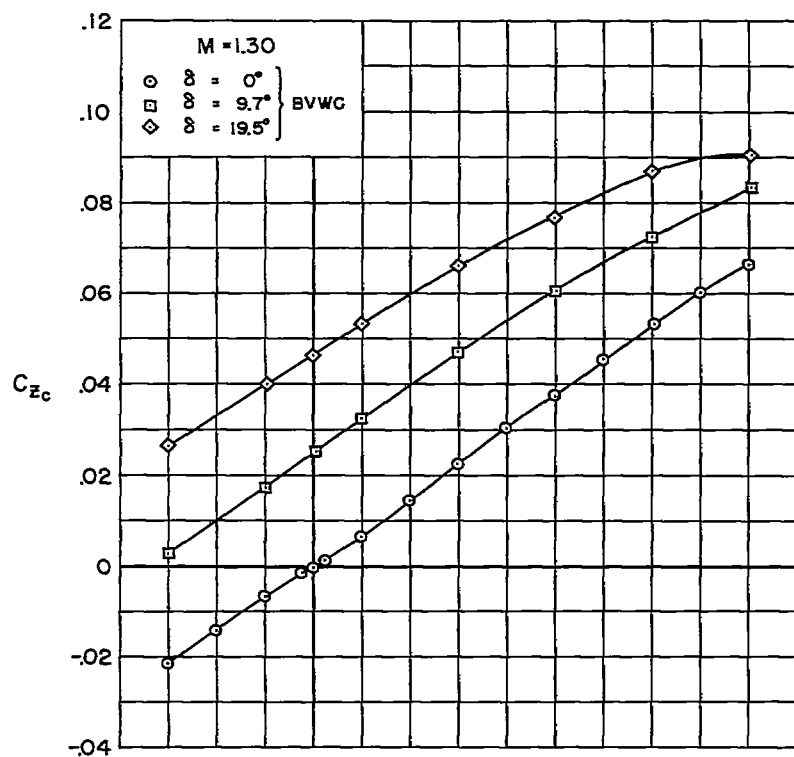
(d) $M = 1.30$

Figure 3.- Continued.

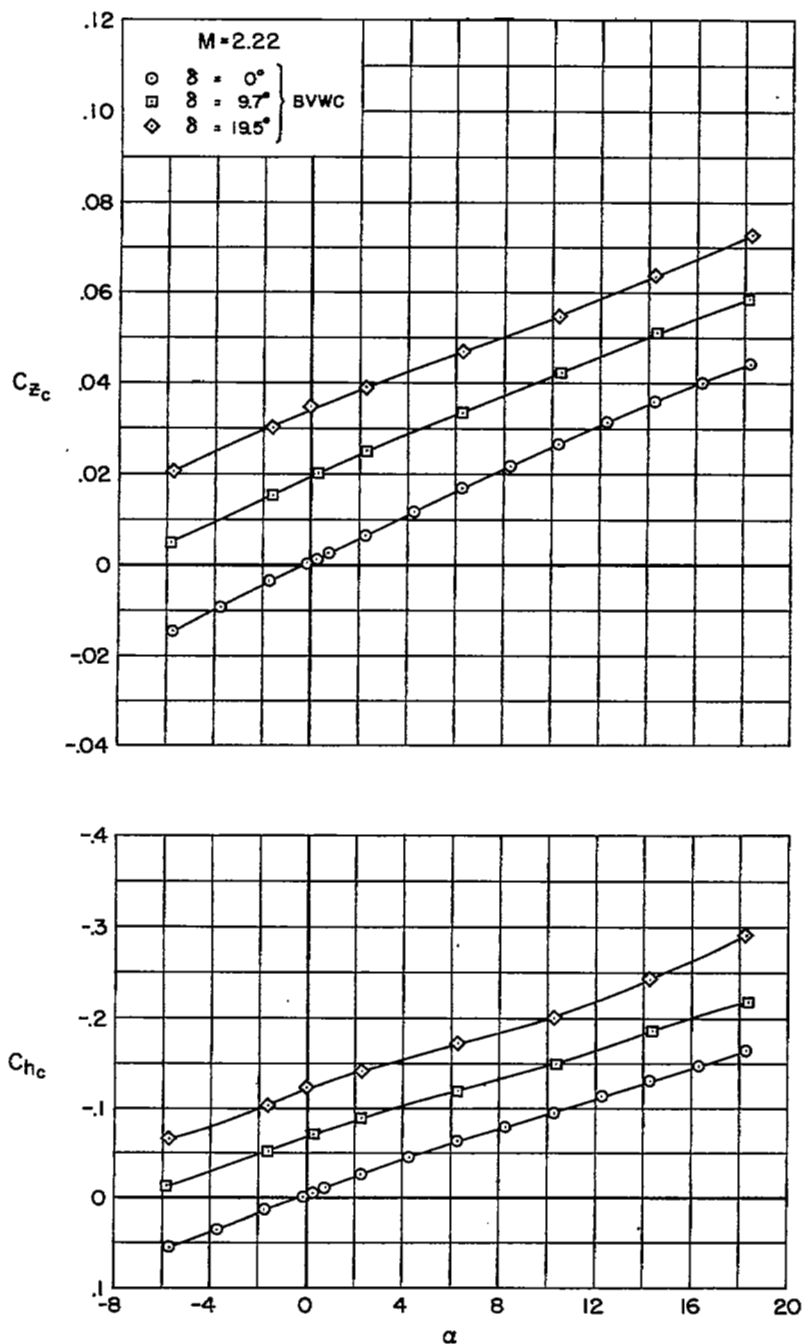
(e) $M = 2.22$

Figure 3.- Concluded.

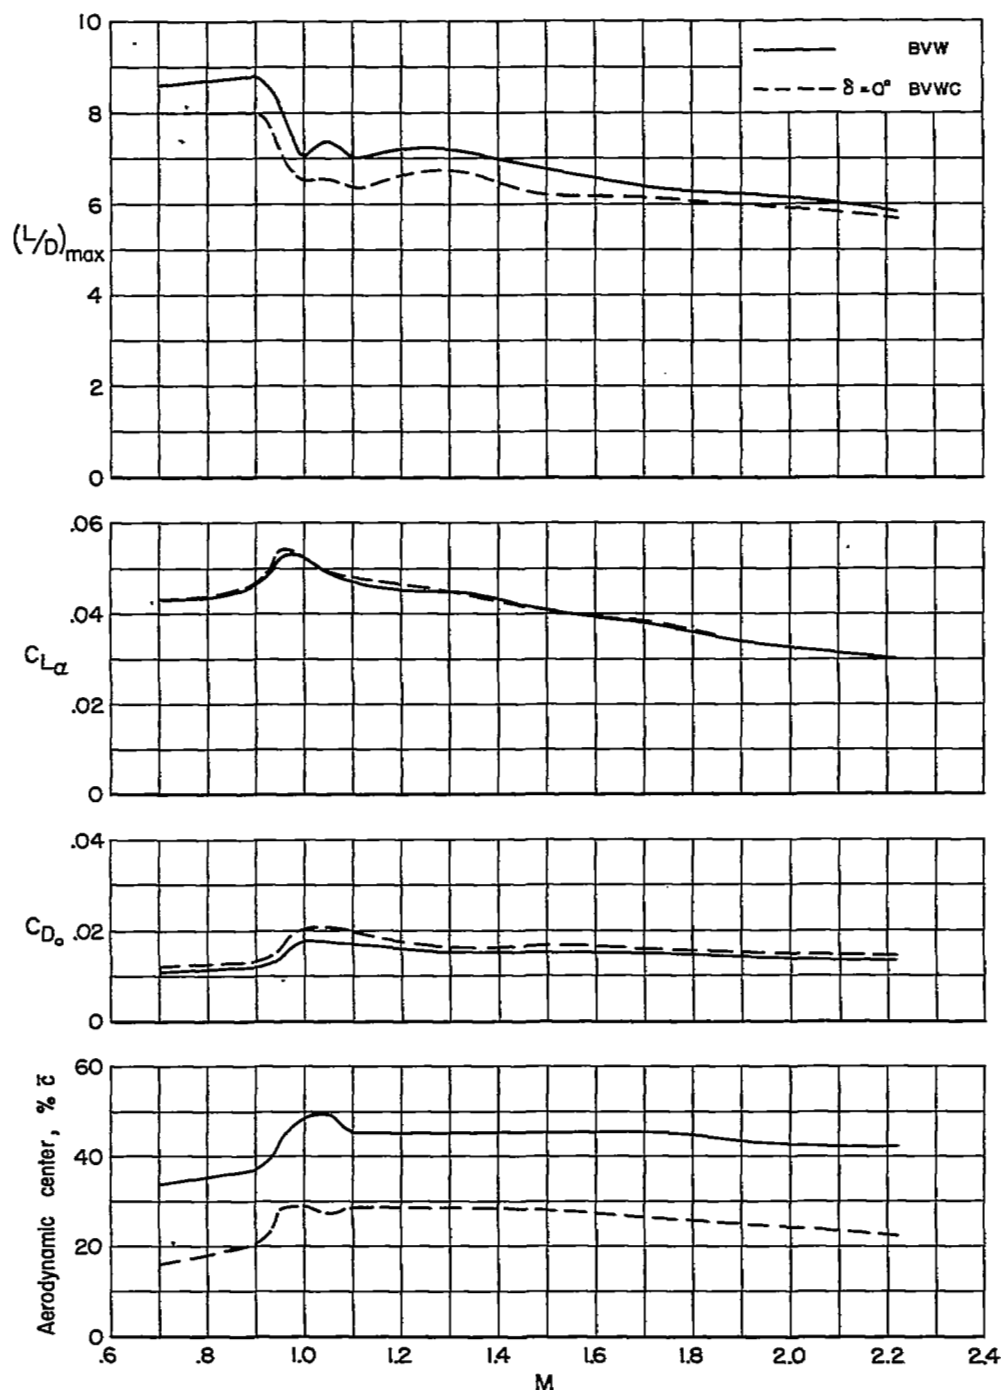


Figure 4.- Variation of maximum lift-drag ratios, lift-curve slopes, minimum drag coefficients, and aerodynamic centers as a function of Mach number with the canard on and off.

*Do not copy
top canard!*

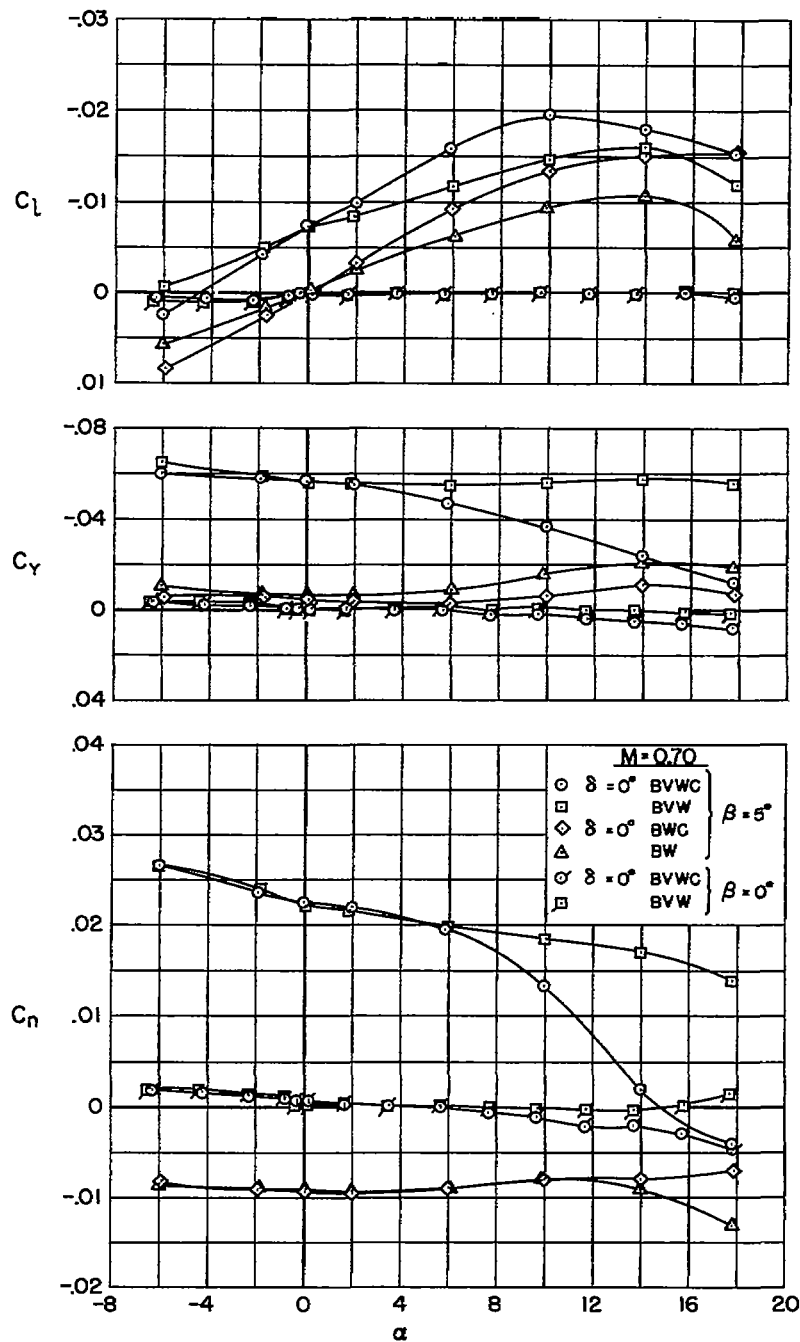
(a) $M = 0.70$

Figure 5.- The effect of configuration changes on the lateral-directional stability characteristics as a function of angle of attack at constant sideslip angles.

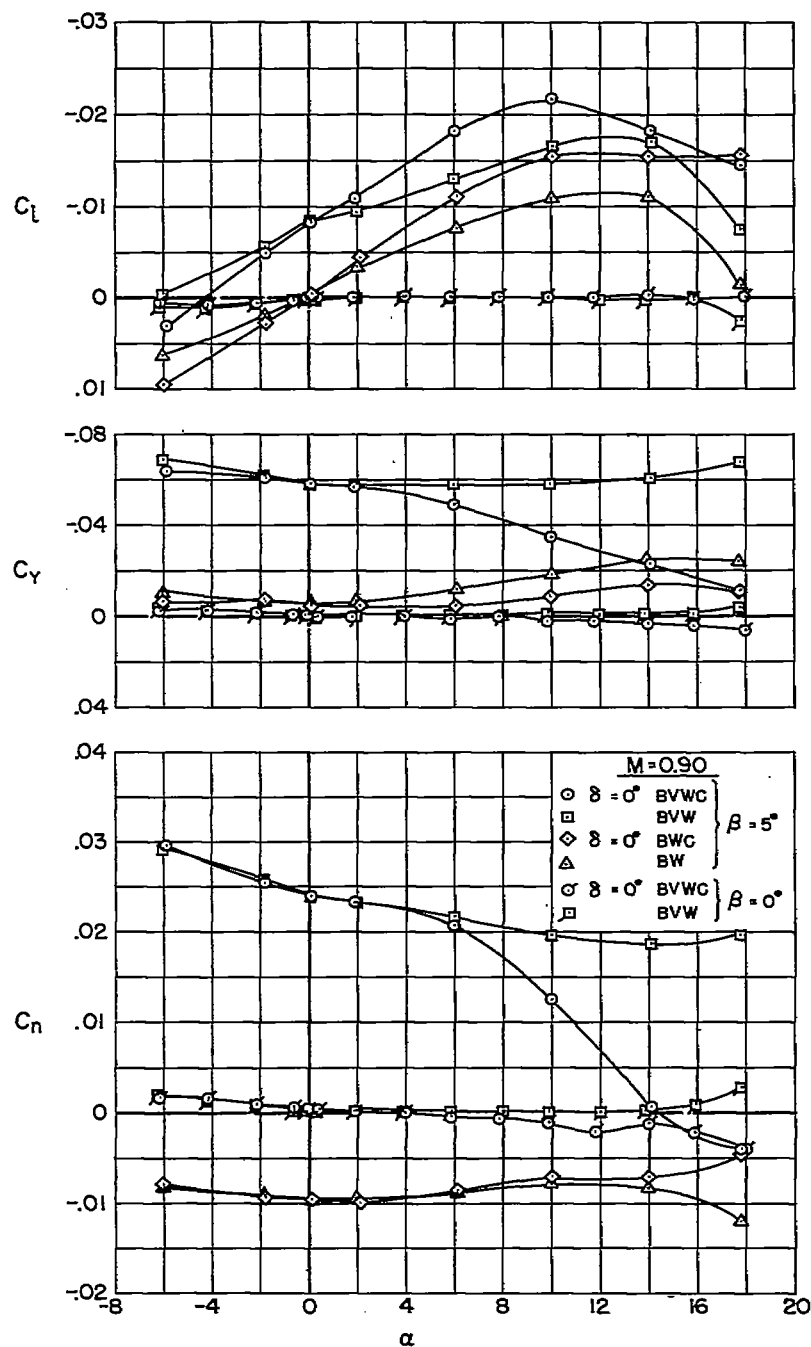
(b) $M = 0.90$

Figure 5.- Continued.

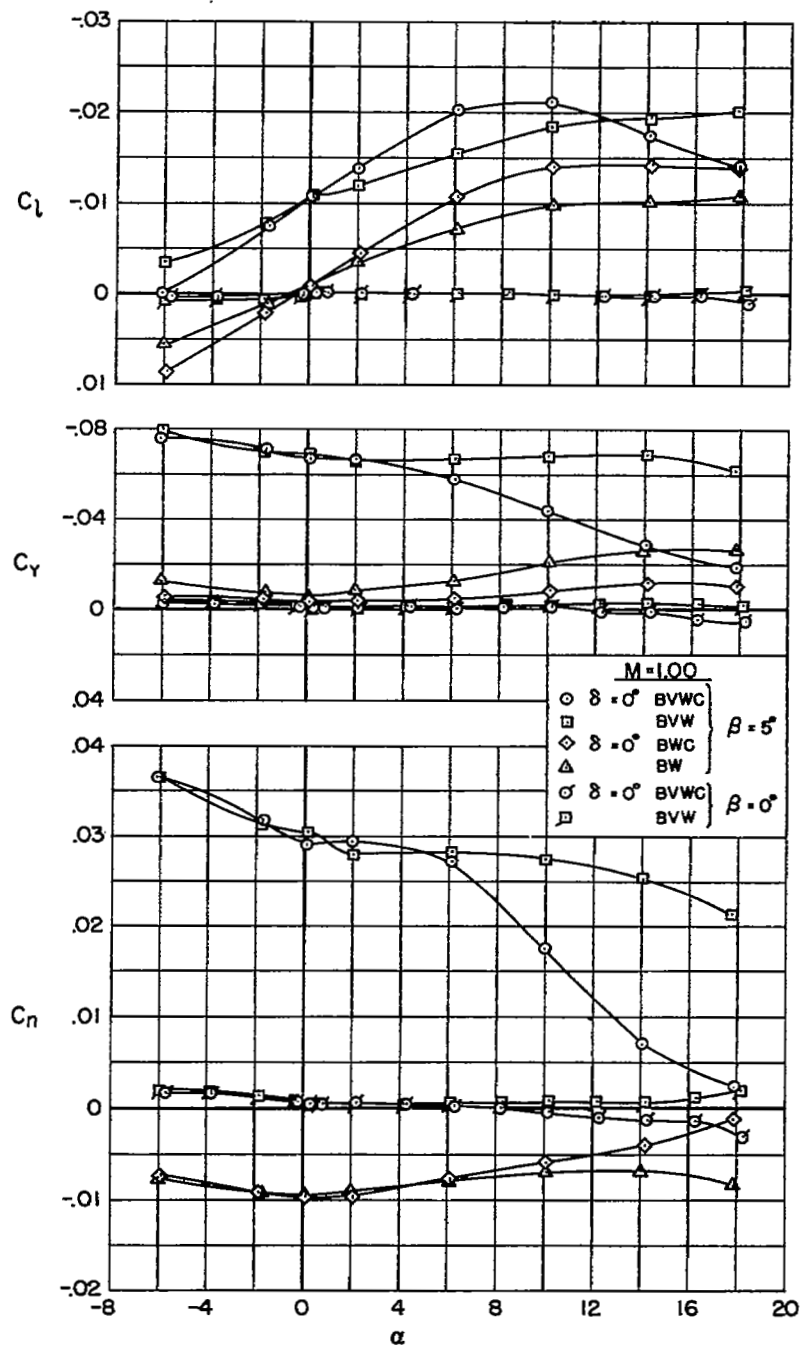
(c) $M = 1.00$

Figure 5.- Continued.

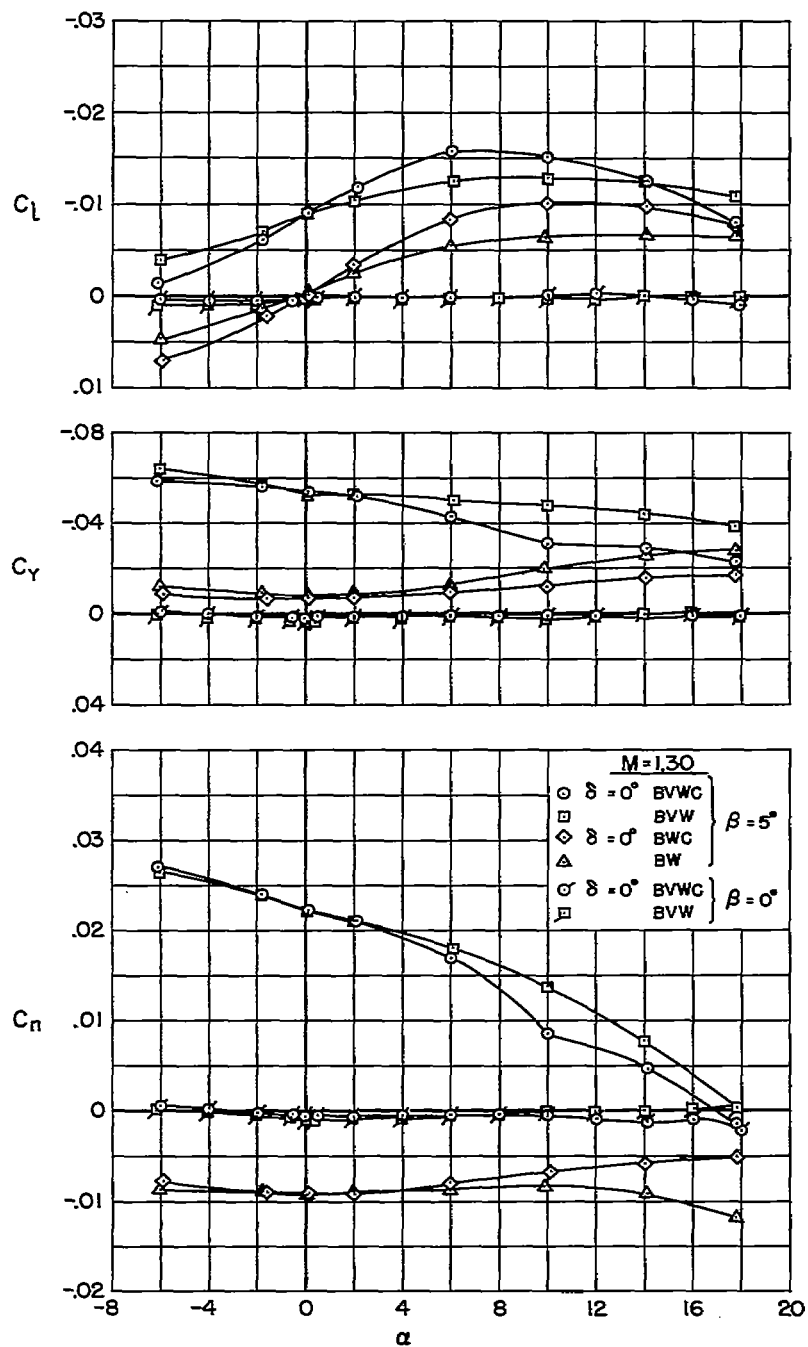
(d) $M = 1.30$

Figure 5.- Continued.

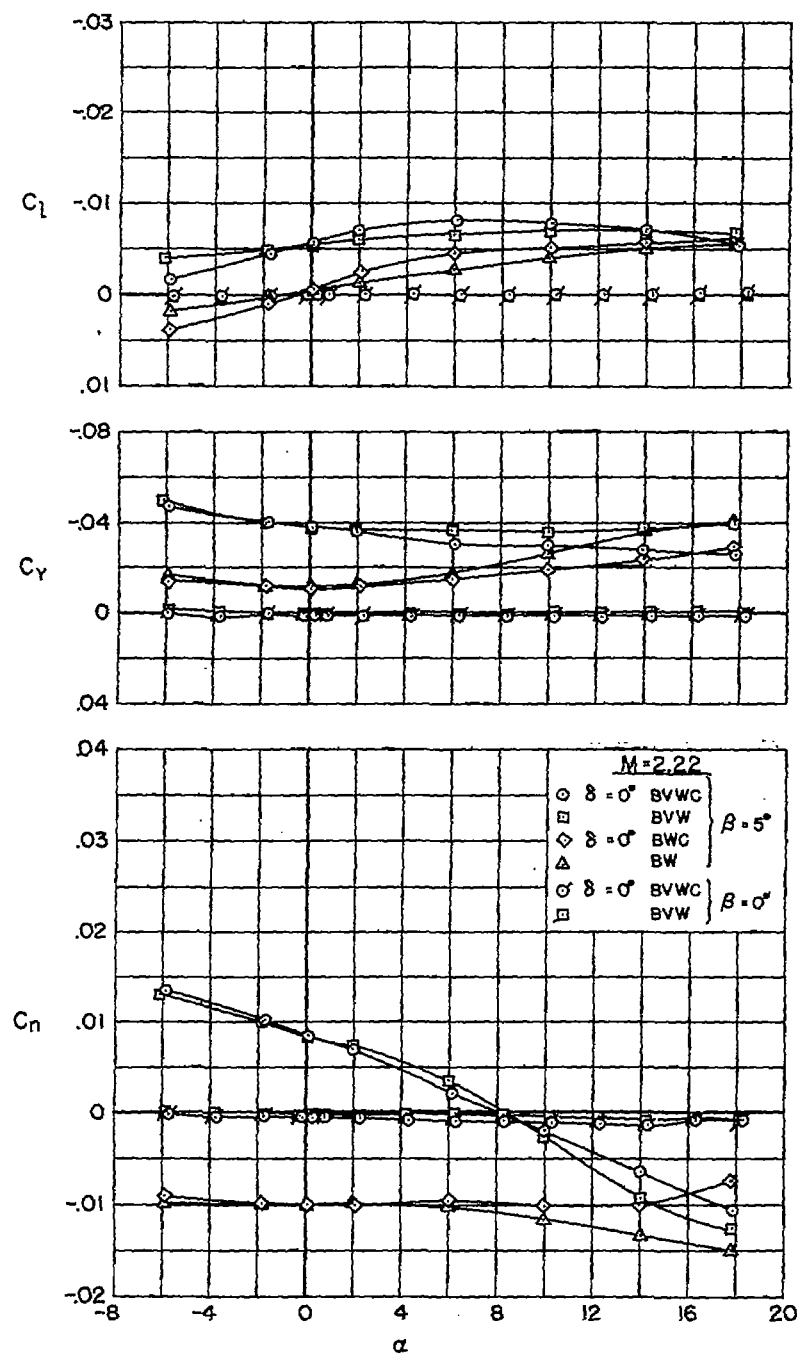
(e) $M = 2.22$

Figure 5.- Concluded.

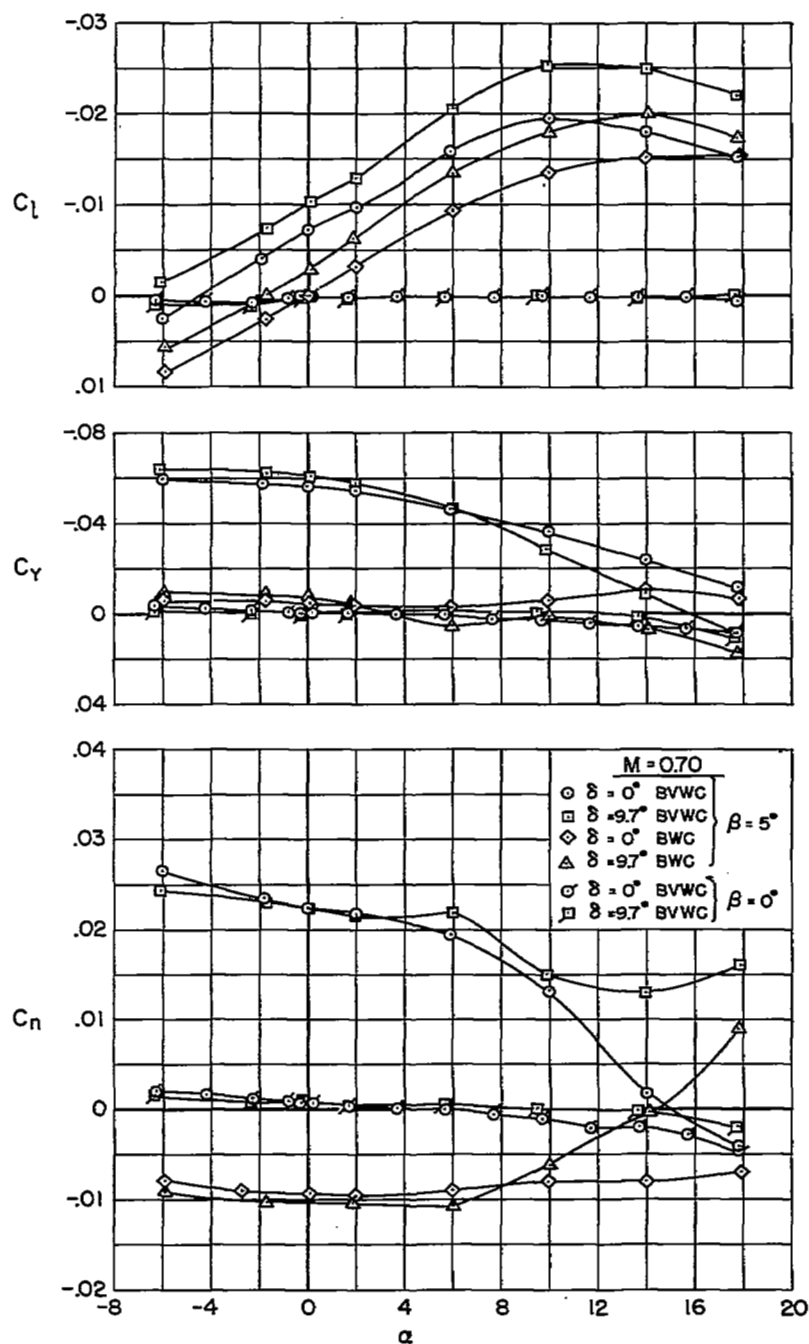
(a) $M = 0.70$

Figure 6.- The effect of canard deflection on the lateral-directional characteristics with the vertical tail on and off as a function of angle of attack at constant sideslip angles.

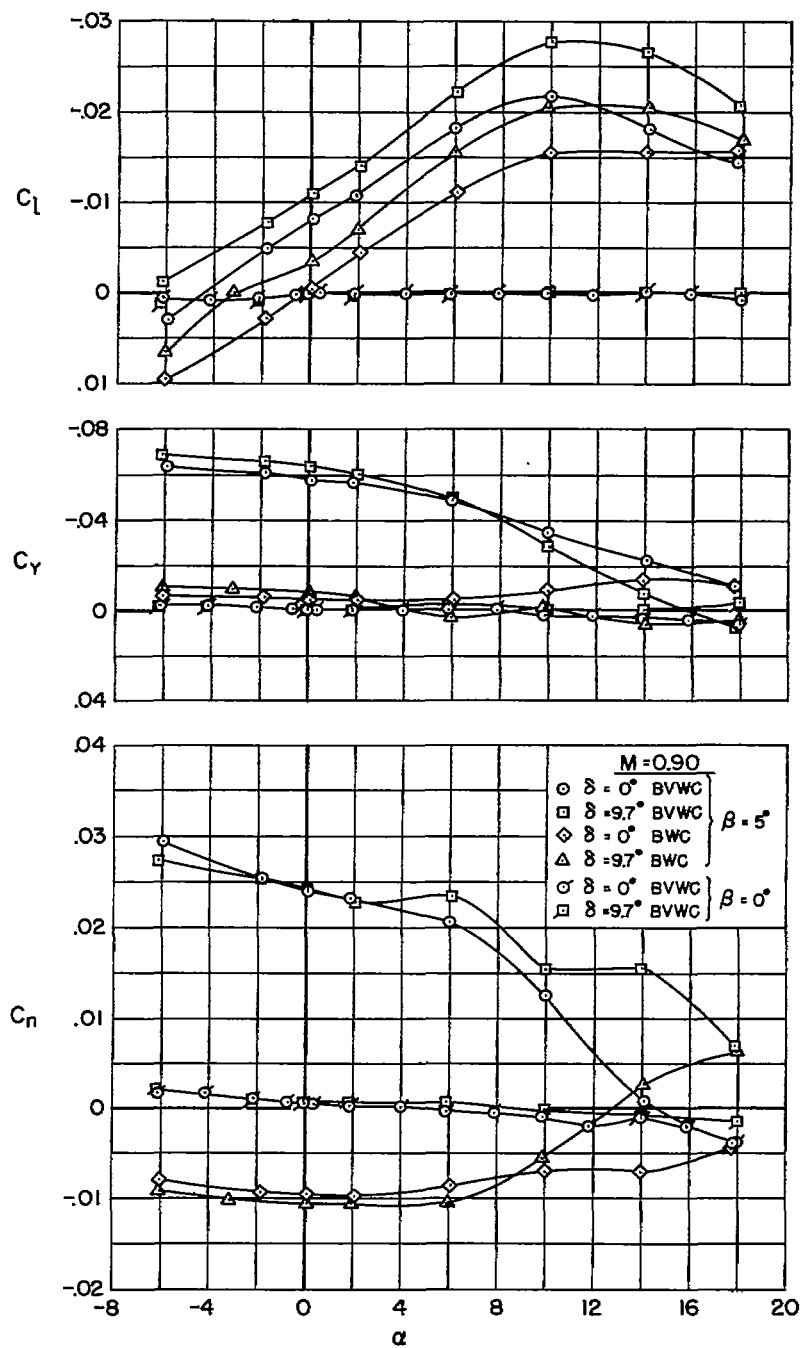
(b) $M = 0.90$

Figure 6.- Continued.

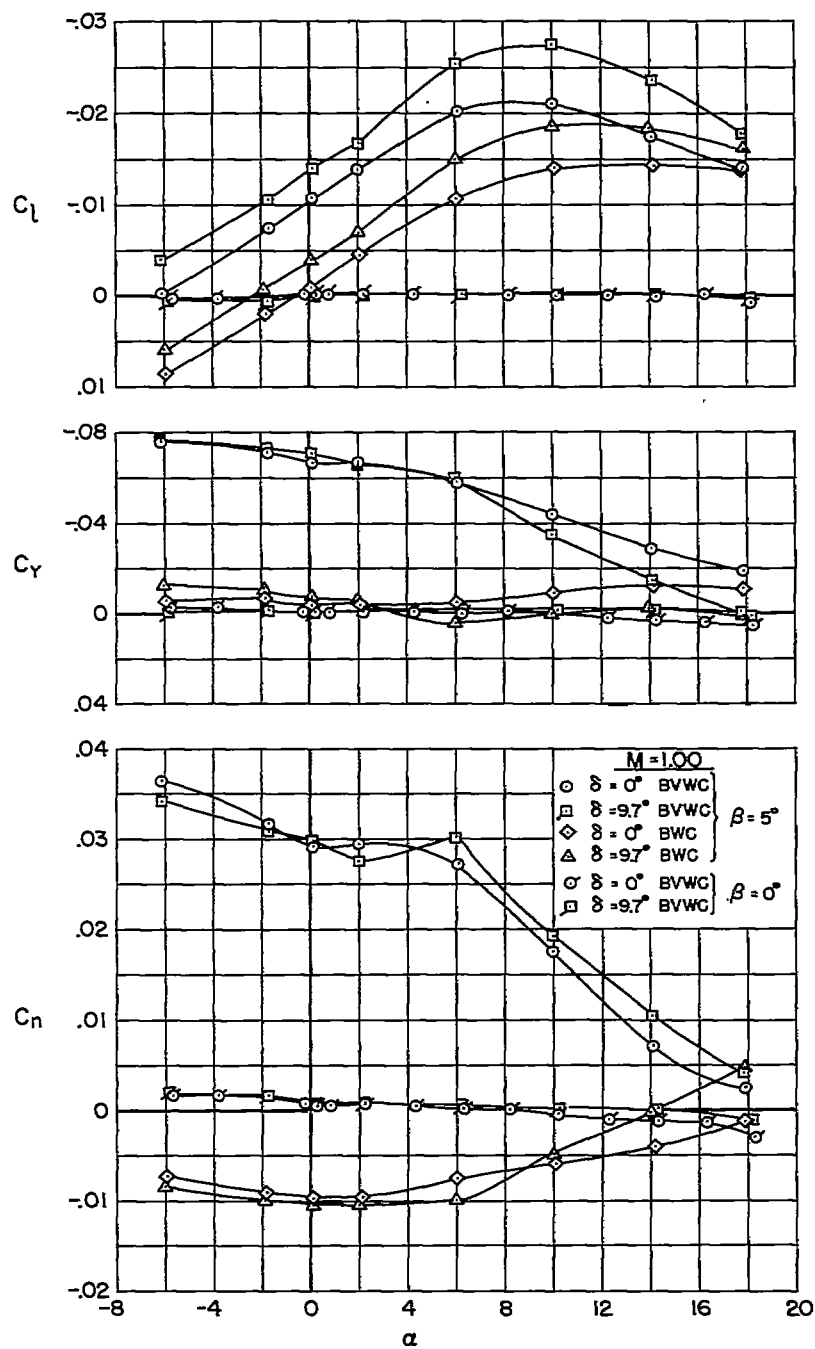
(c) $M = 1.00$

Figure 6.- Continued.

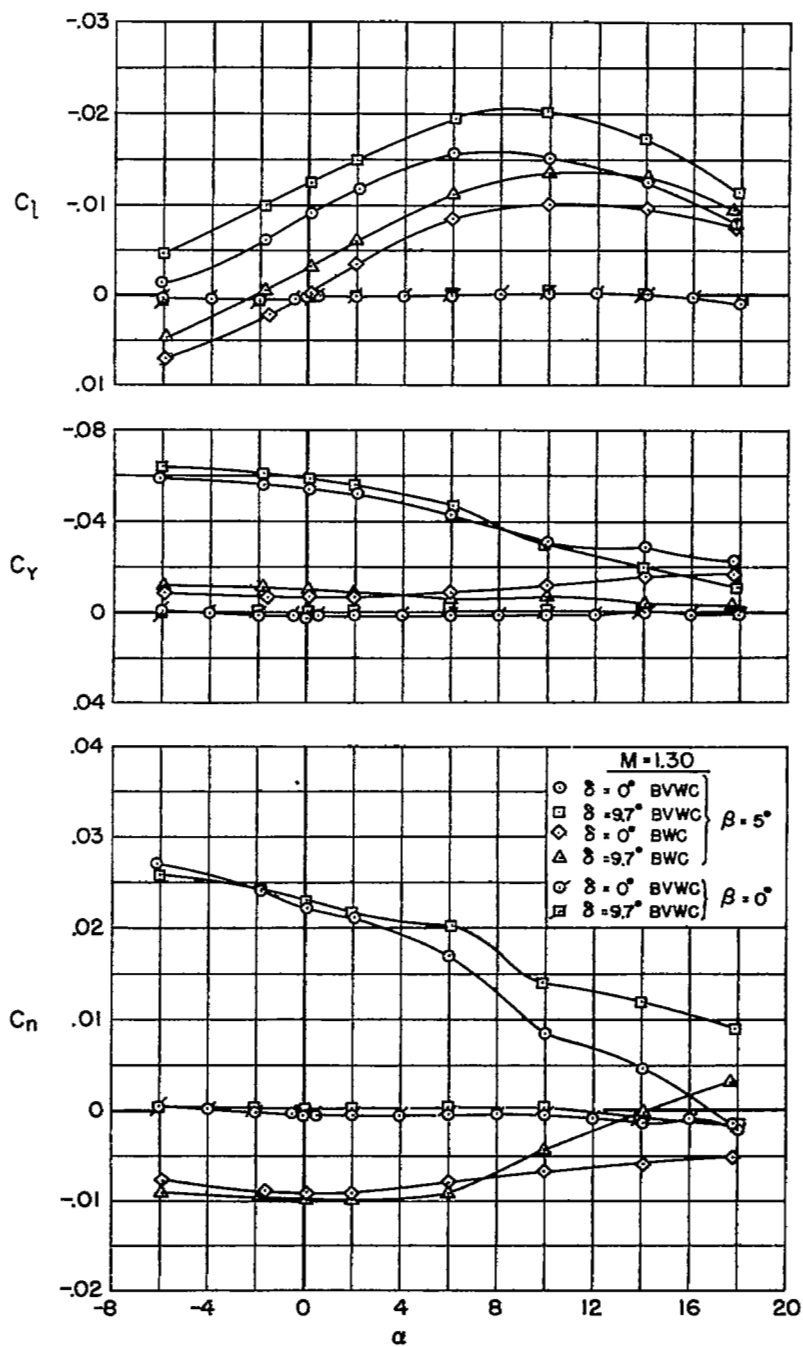
(d) $M = 1.30$

Figure 6.- Continued.

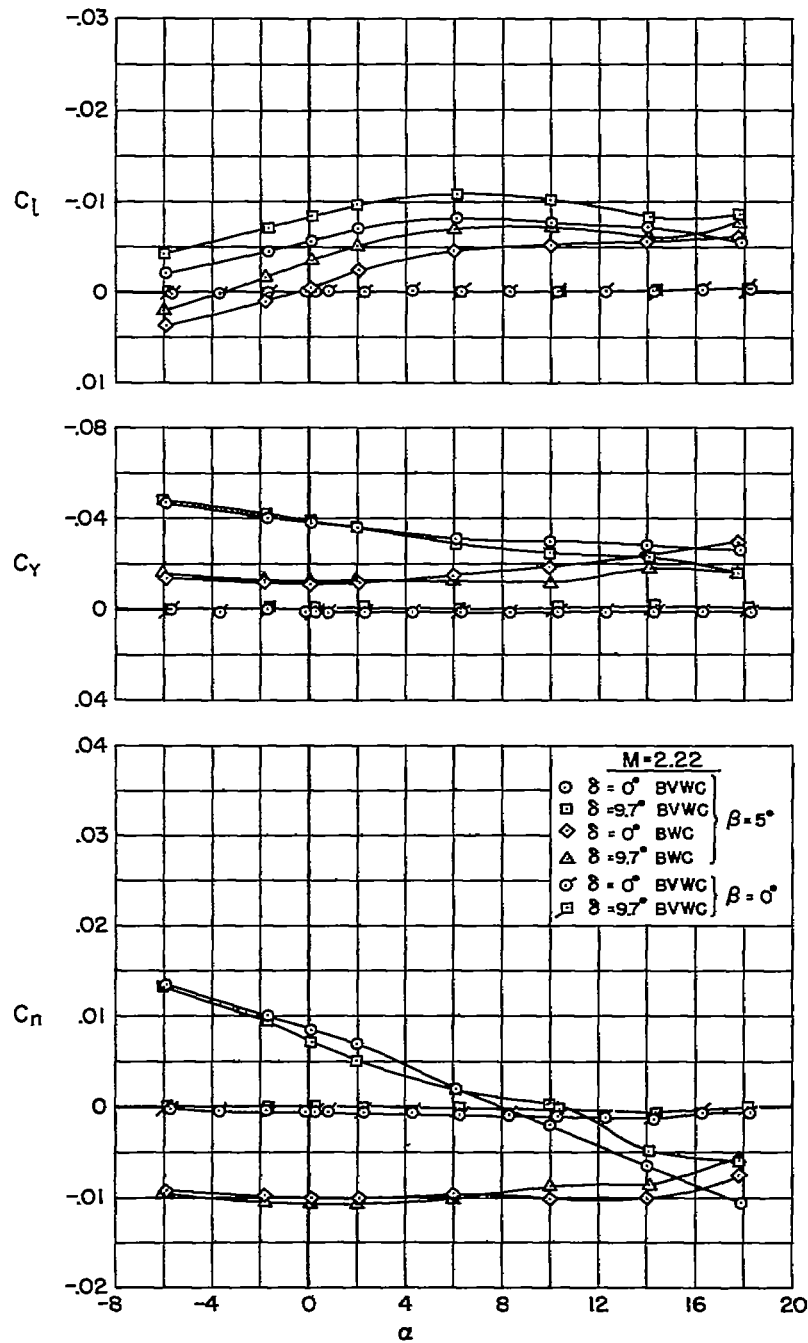
(e) $M = 2.22$

Figure 6.- Concluded.


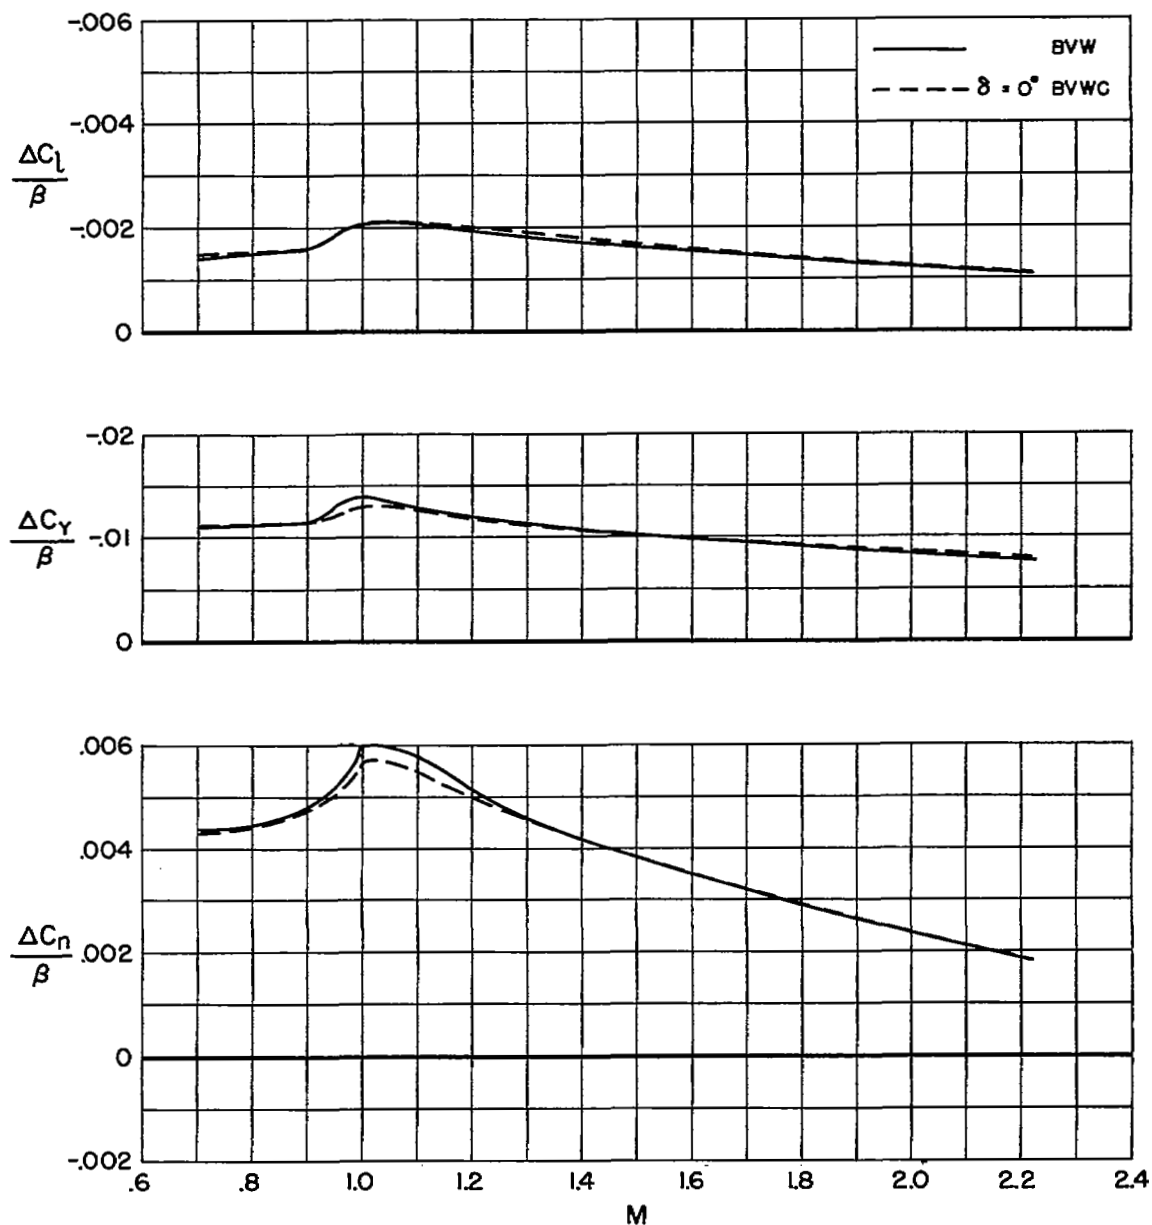
(a) $\alpha = 0^\circ$

Figure 7.- Variation of $\Delta C_l/\beta$, $\Delta C_Y/\beta$, and $\Delta C_n/\beta$ as a function of Mach number at constant angles of attack with the canard on and off with the vertical tail on.

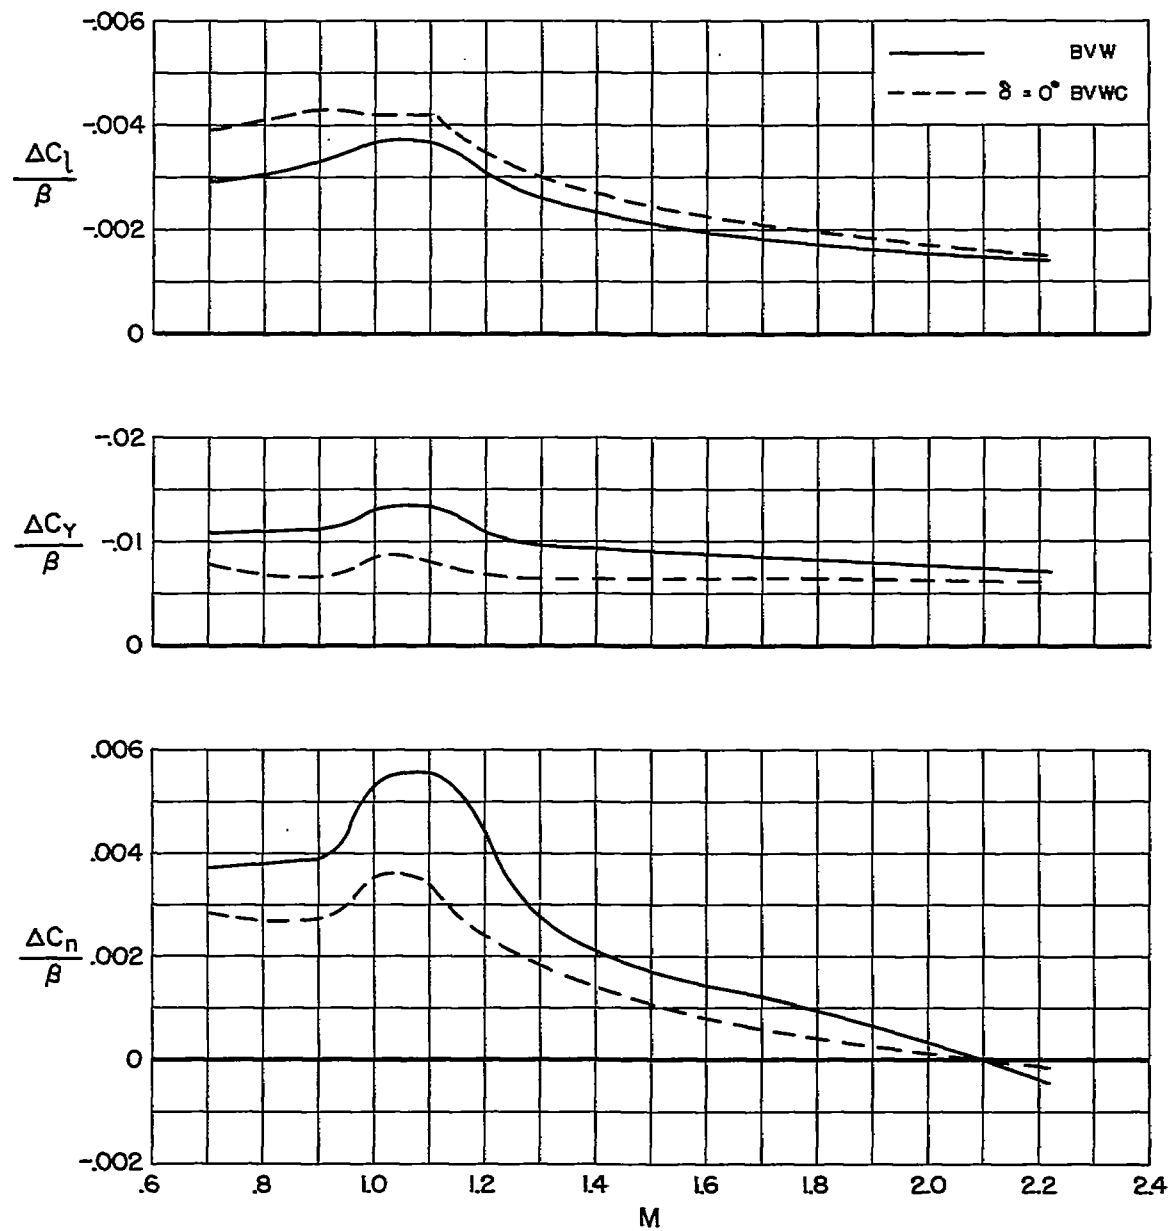

(b) $\alpha = 10^\circ$

Figure 7.- Continued.


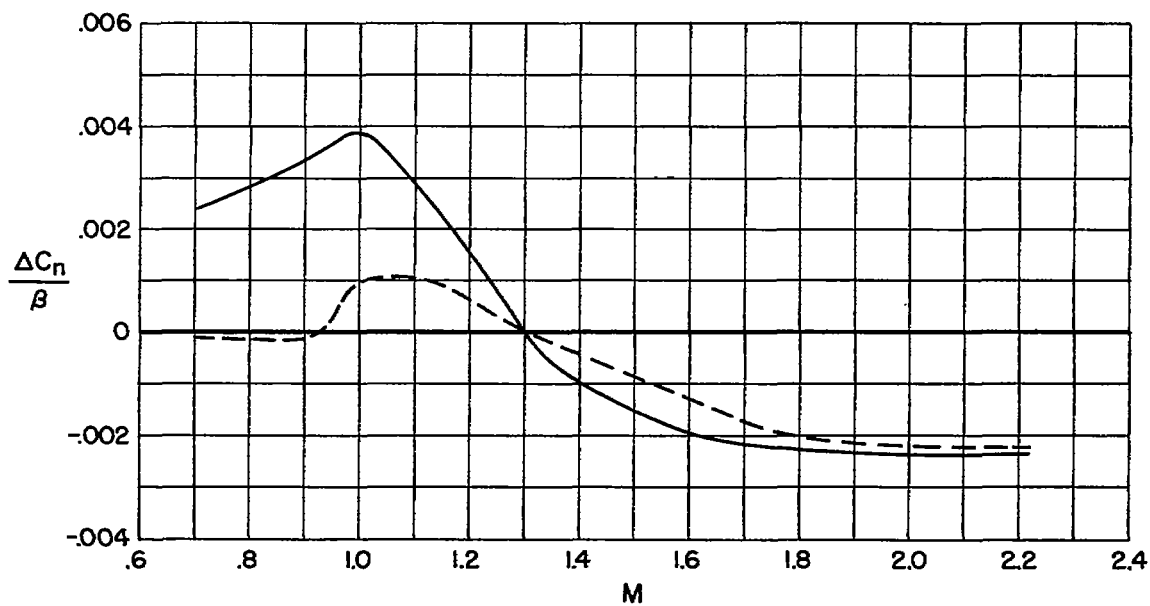
~~CONFIDENTIAL~~(c) $\alpha = 18^\circ$

Figure 7.- Concluded.

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

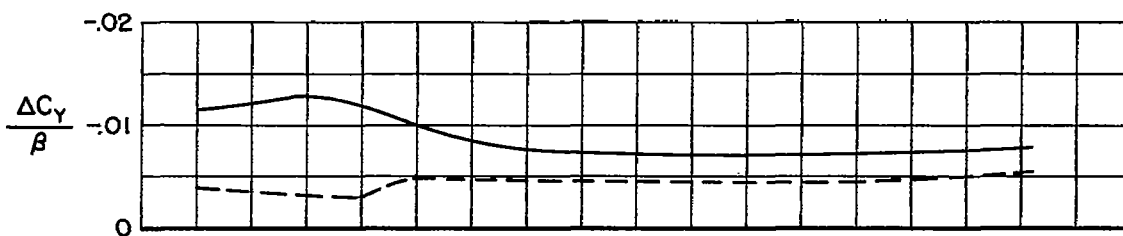

~~CONFIDENTIAL~~